


RoHS COMPLIANT

CE

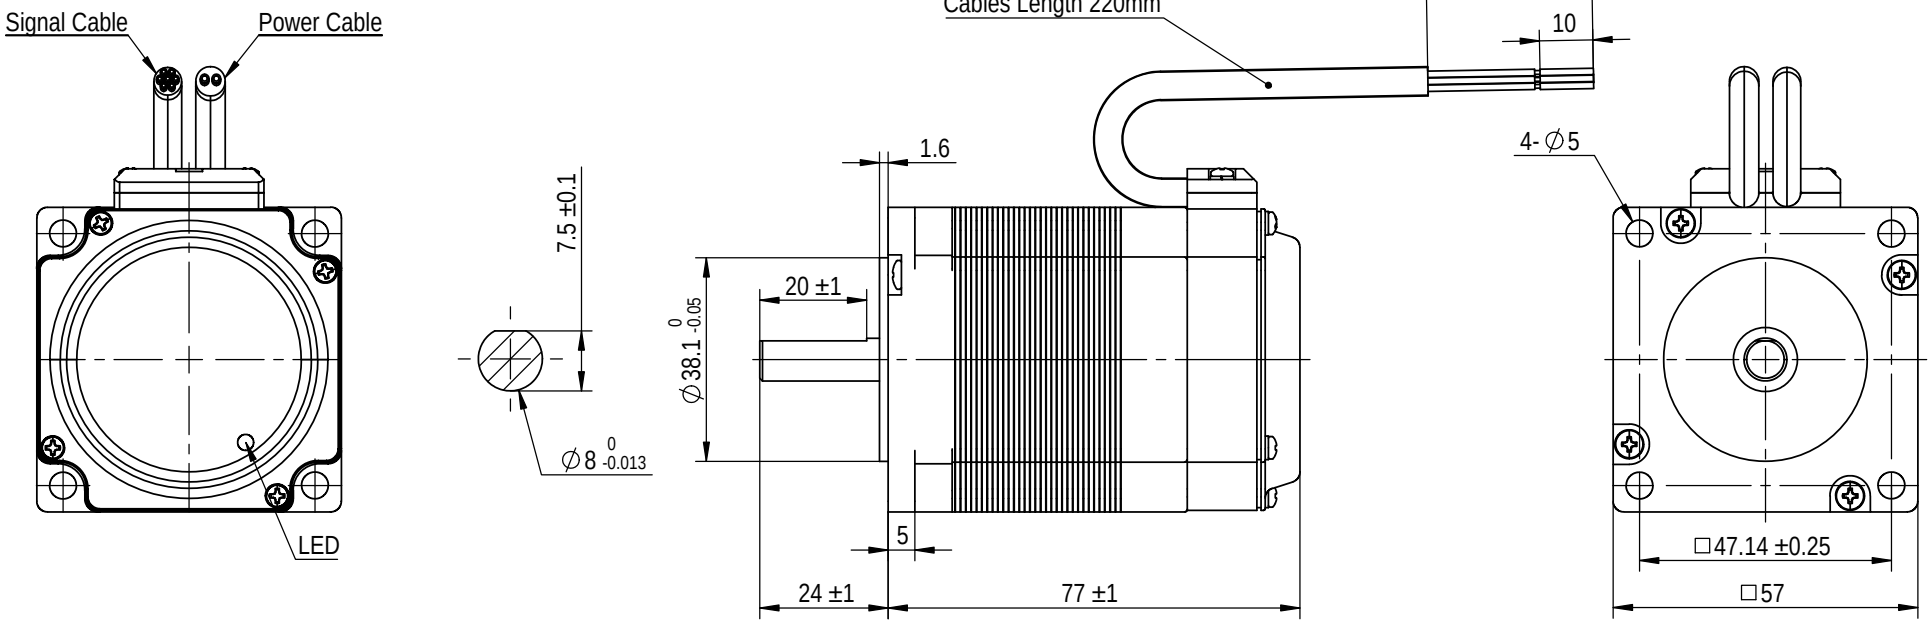

Weight：810g

Dimensions Unit=mm

STEP ANGLE	1.8°±5%/full step	NUMBER OF PHASE	2
RATED CURRENT	2.8 A	WEIGHT	810g
ROTOR INERTIA	300 g.cm²	AXIAL-FORCE	Fa=15 N Max
SOURCE VOLTAGE	24 VDC	RADIAL-FORCE	Fr=75 N Max
HOLDING TORQUE	1.2 N.m		
OPERATION AMBIENT	Ambient temperature：-20...+50°C，humidity Max.85% (No condensation)		
STORAGE AMBIENT	Ambient temperature：-20...+85°C，humidity Max.85% (No condensation)		

MATERIAL			
STAGE MARK		WEIGHT	SCALE
		810g	1:1
FIRST ANGLE PROJECTION			
SHEET 1 OF 2			


UIROBOT

MODEL NUMBER

UIM5756PM


DWG NO.


EDITION




RoHS COMPLIANT

CE

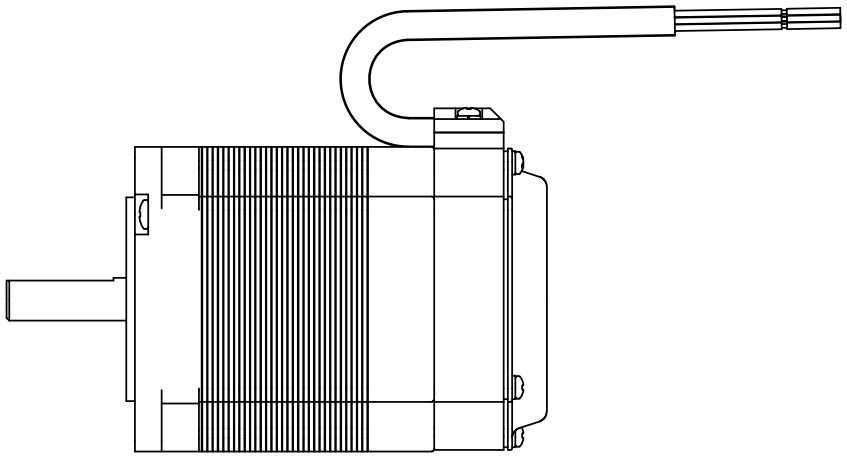

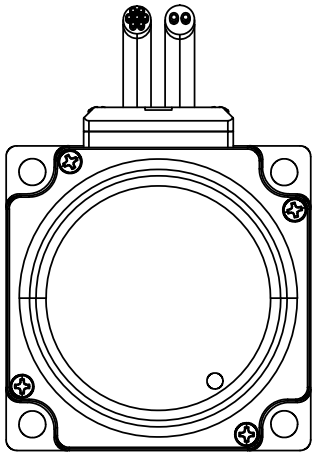

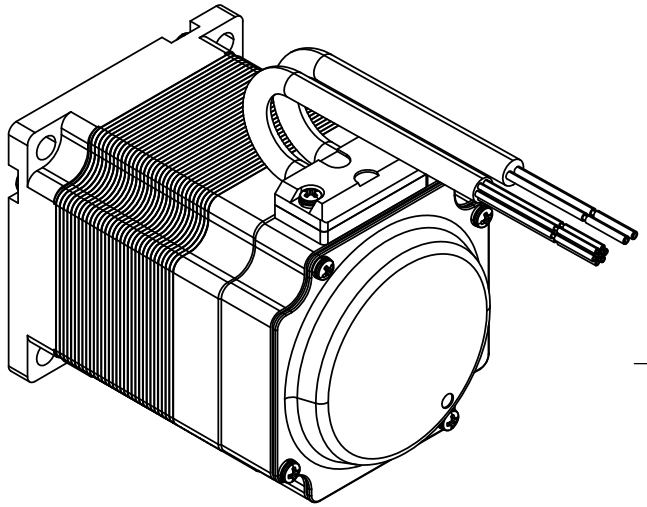

Weight：810g

Dimensions Unit=mm

STEP ANGLE	1.8°±5%/full step	NUMBER OF PHASE	2	MATERIAL	UIROBOT
RATED CURRENT	2.8 A	WEIGHT	810g		
ROTOR INERTIA	300 g.cm²	AXIAL-FORCE	Fa=15 N Max		
SOURCE VOLTAGE	24 VDC	RADIAL-FORCE	Fr=75 N Max	STAGE MARK / WEIGHT / SCALE	MODEL NUMBER
HOLDING TORQUE	1.2 N.m			810g / 1:1	UIM5756PM
OPERATION AMBIENT	Ambient temperature：-20...+50℃， humidity Max.85% (No condensation)			FIRST ANGLE PROJECTION	DWG NO.
STORAGE AMBIENT	Ambient temperature：-20...+85℃， humidity Max.85% (No condensation)			SHEET 2 OF 2	EDITION