Description

Features:

1. The module is the ESP-32 development board, and the parameter characteristics of ESP-32 refer to the parameter characteristics of the module.

2. Adopting 802.11b/g/WiFi+BT module;

3. Low power dual core 32-bit CPU, can be used as an application processor;

4. The main frequency can reach up to 240MHz, and the computing power can reach up to 600DMIPS;

5. Built in 520KBSRAM;

6. Support UART/SPI/I2C/PWM/DAC/ADC and other interfaces;

7. Support openOCD debugging interface;

8. Supports multiple sleep modes, with a current as low as 6.5uA during deep sleep;

9. Embedded LWip and FreeRTOS;

10. Support STA/AP/STA+AP mode;

11. Support SmartConfiguration/AirKiss one click network configuration;

12. Universal AT commands, easy to learn;

13. Support local serial port upgrade and remote upgrade (FOTA).

Parameter:

Product name: ESP32 WiFi+BT dual-mode development board

SPI Flash: default 32Mbit

Bluetooth: Bluetooth 4.2BR/EDR and BLE standards

Wi-Fi:802.11b/g/n/

Supported interfaces: UART SPI□SDIO□I2C□PWM□I2S□IR□ADC□DAC

On chip sensors: Hall sensors, temperature sensors, capacitive touch sensors

IO ports: 22

Serial port speed: default 115200bps

Spectrum range: 2412~2484MHz

Antenna form: onboard PCB antenna with a gain of 2dBi

Transmission power:

802.11b: 17 ± 2dBm (@ 11Mbps)

802.11g: 14 ± 2dBm (@ 54Mbps)

802.11n: 13 ± 2dBm (@ MCS7)

Receiving sensitivity:

CCK,1Mbps:-90dBm

CCK,11Mbps:-85dBm

6Mbps (1/2BPSK): -88dBm

54Mbps (3/464-QAM): -70dBm

MCS7 (65Mbps, 72.2Mbps): -67dBm

Power consumption: 300mA@3.3V

Security: WPA/WPA2/WPA2 Enterprise/WPS

Power supply range:

USB power supply: 5V

Vin pin power supply: 6.0V~12V

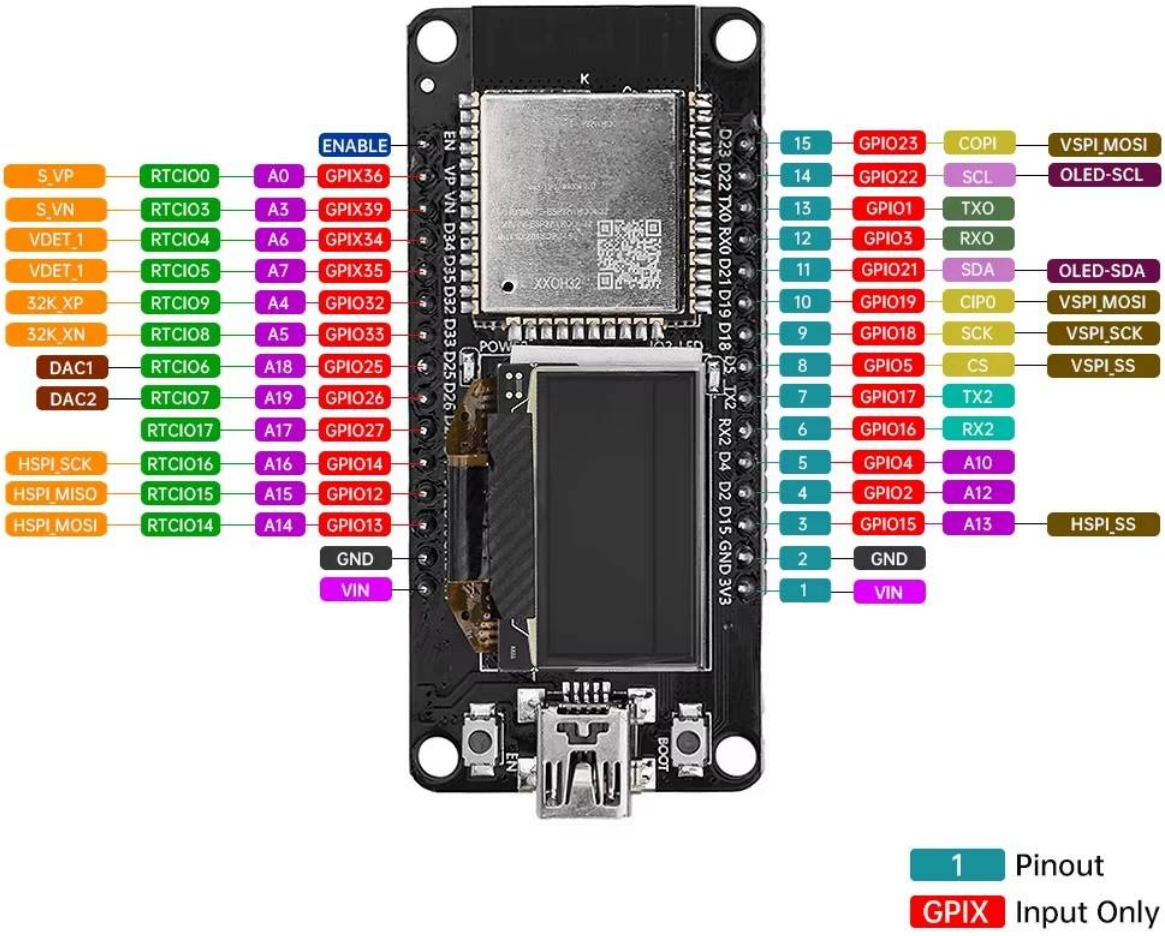
Working temperature: -20 °~80 °

Size: 53.2mm * 28.7mm

Package include:

1X development board

Pictures





Mini USB

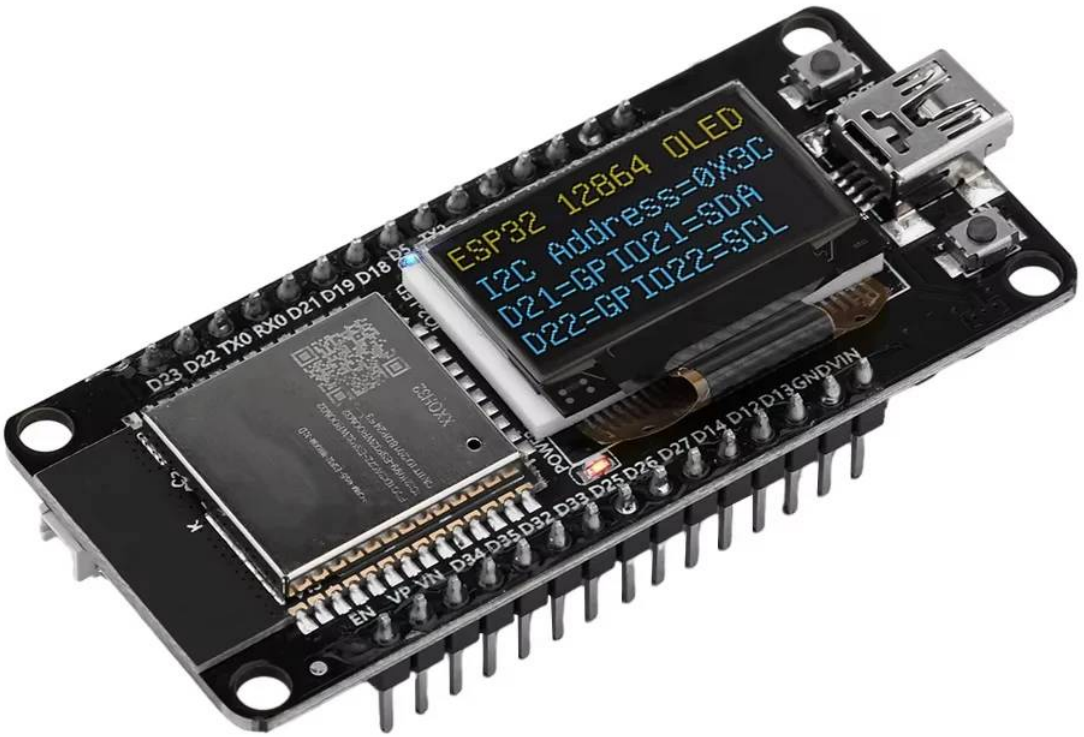


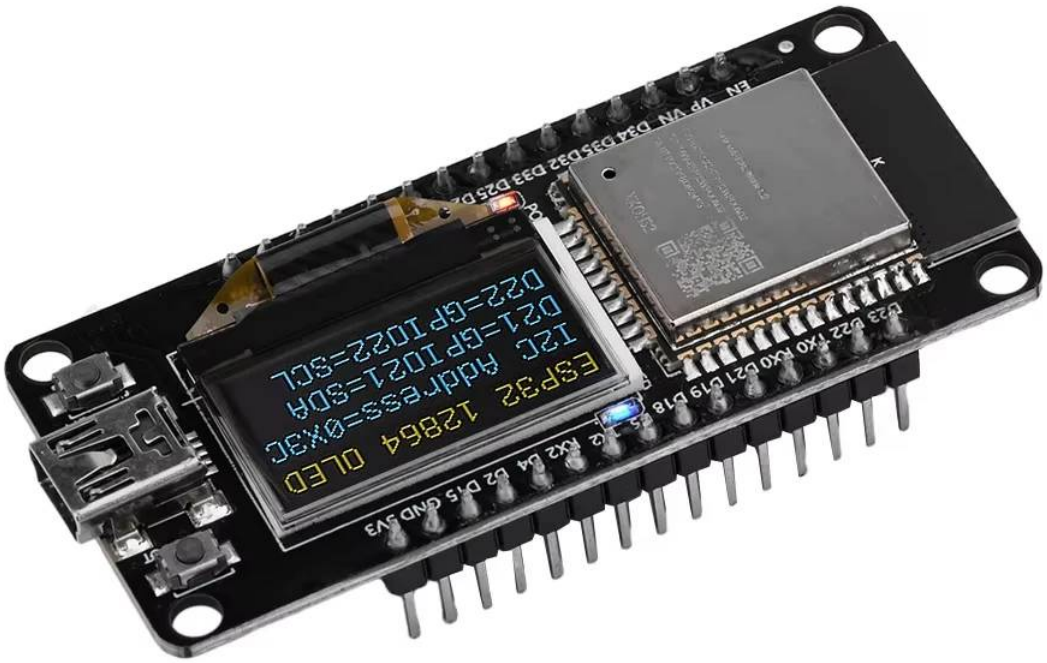
Micro USB

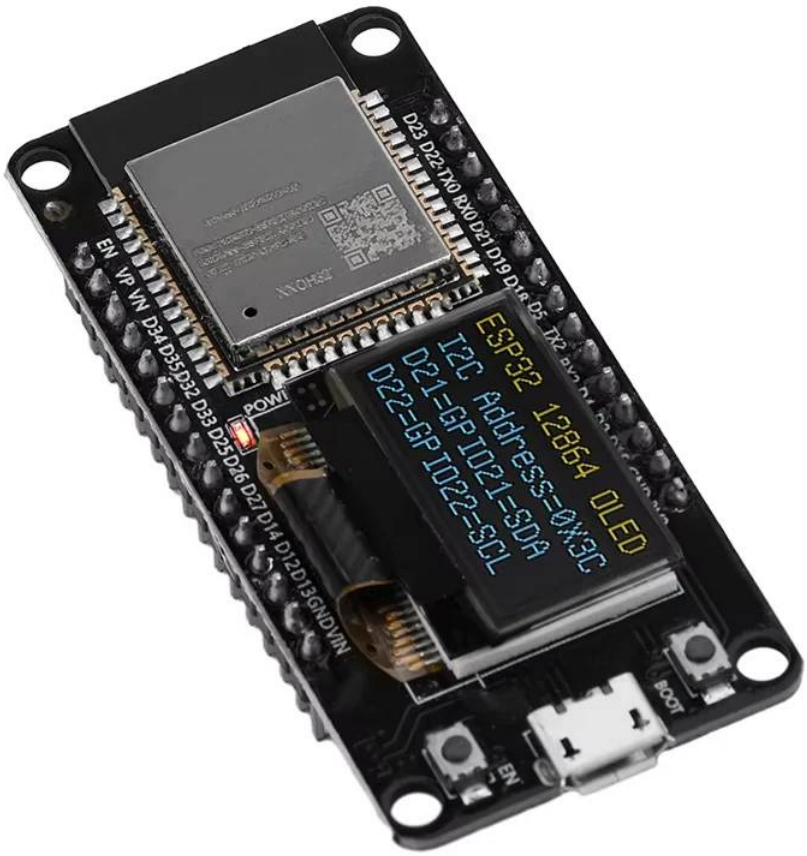


Type-C

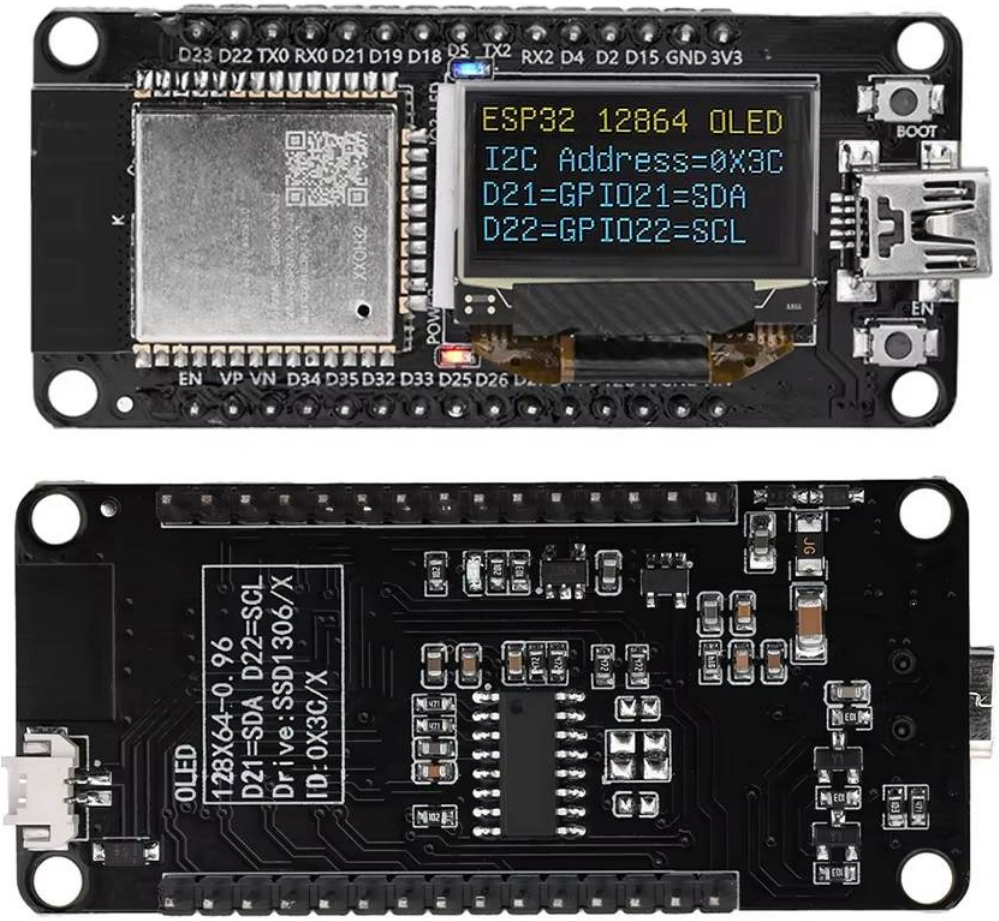

ESP32 12864 OLED
I2C Address=0x3C
D21=GPIO21=SDA
D22=GPIO22=SCL
D23 D22 TX0 RX0 D21 D19
EN VP VN D34 D35 D32 D33 D25 D26 D27 D14 D12 D13 GND VIN
BOOT
EN


ESP32 12864 OLED
I2C Address=0X3C
D21=GPIO21=SDA
D22=GPIO22=SCL
D23 D22 TX0 RX0 D21 D19 D18 D5
D15 D2 D4 RX2 TX2
D13 GND VIN
D12 D14 D27 D26 D25 D33 D32 D35 D34 VN VP EN

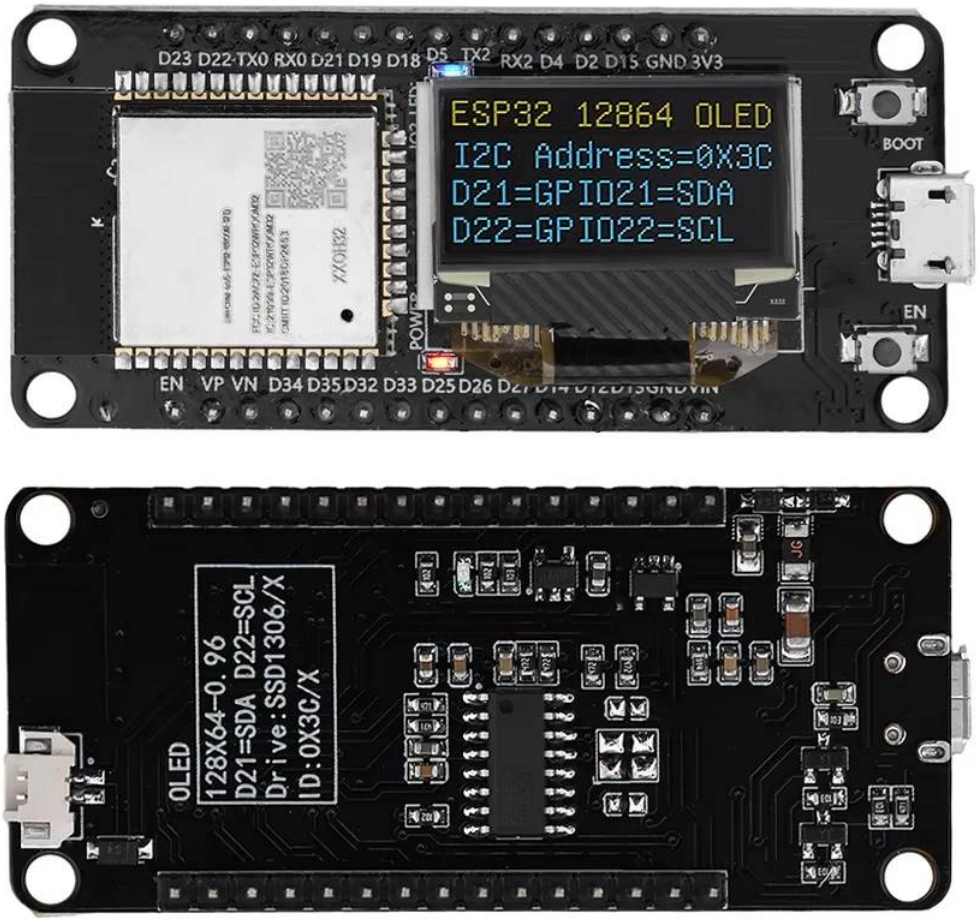

ESP32 128x64 OLED
I2C Address=0x3C
D21=GPIO21=SDA
D22=GPIO22=SCL


ESP32 12864 OLED
I2C Address=0x3C
D21=GPIO21=SDA
D22=GPIO22=SCL
D23 D22 TX0 RX0 D21 D19 D18 D5 TX2
EN VP VN D34 D35 D32 D33 D25 D26 D27 D14 D12 D13 GND VIN
POWER
BOOT
EN

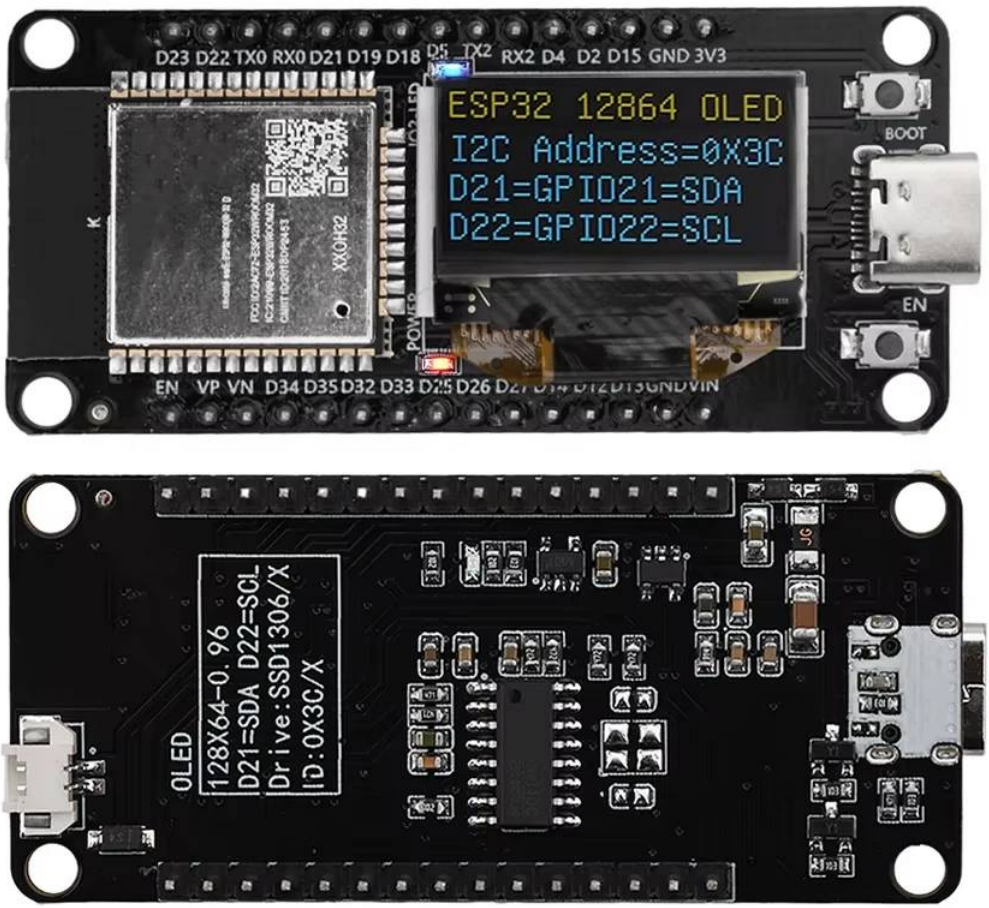
Mini USB port



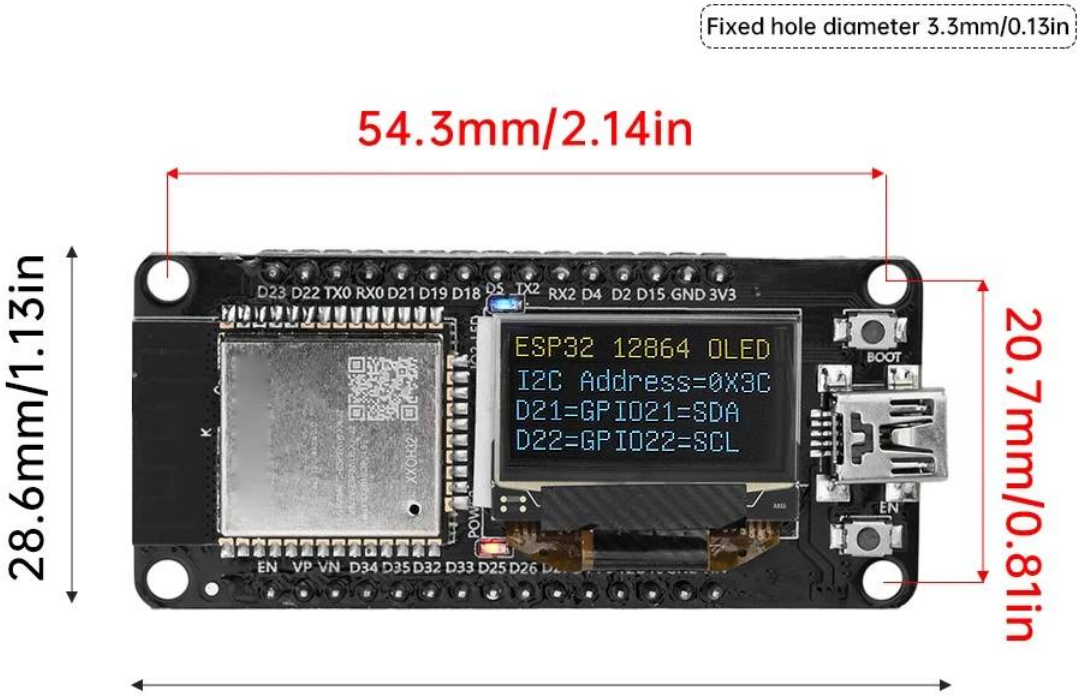
Micro USB port

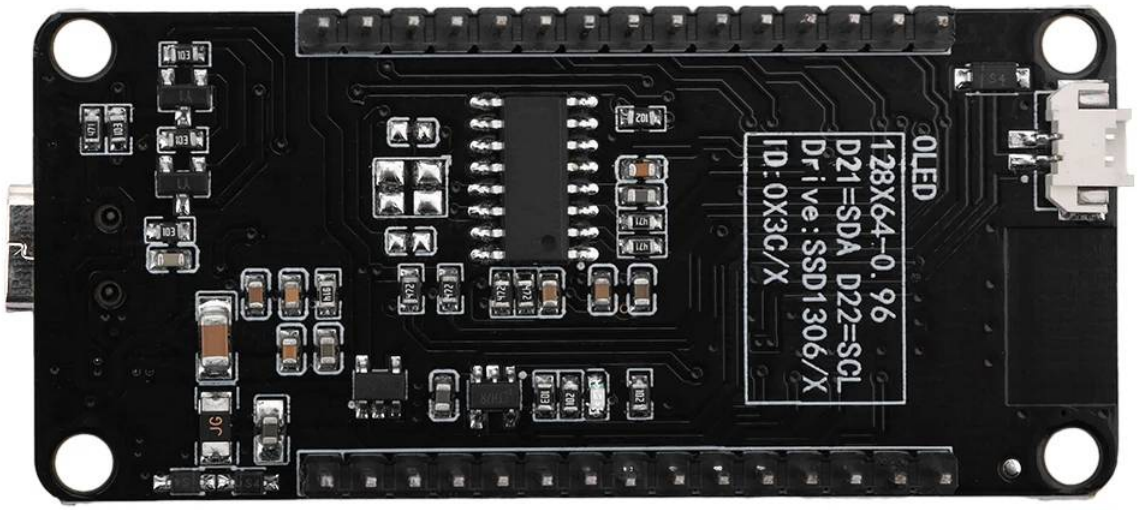


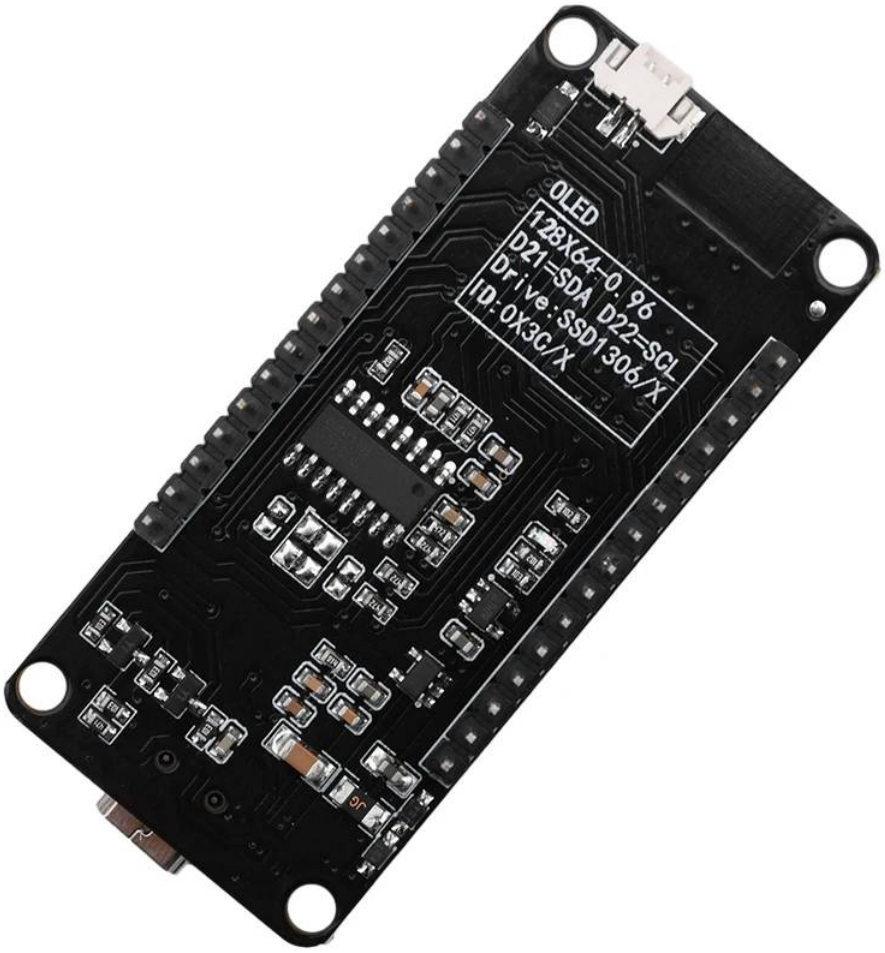
Type-C port


D23 D22 TX0 RX0 D21 D19 D18 D5 TX2 RX2 D4 D2 D15 GND 3V3
ESP32 12864 OLED
I2C Address=0X3C
D21=GPIO21=SDA
D22=GPIO22=SCL
BOOT
EN
EN VP VN D34 D35 D32 D33 D25 D26

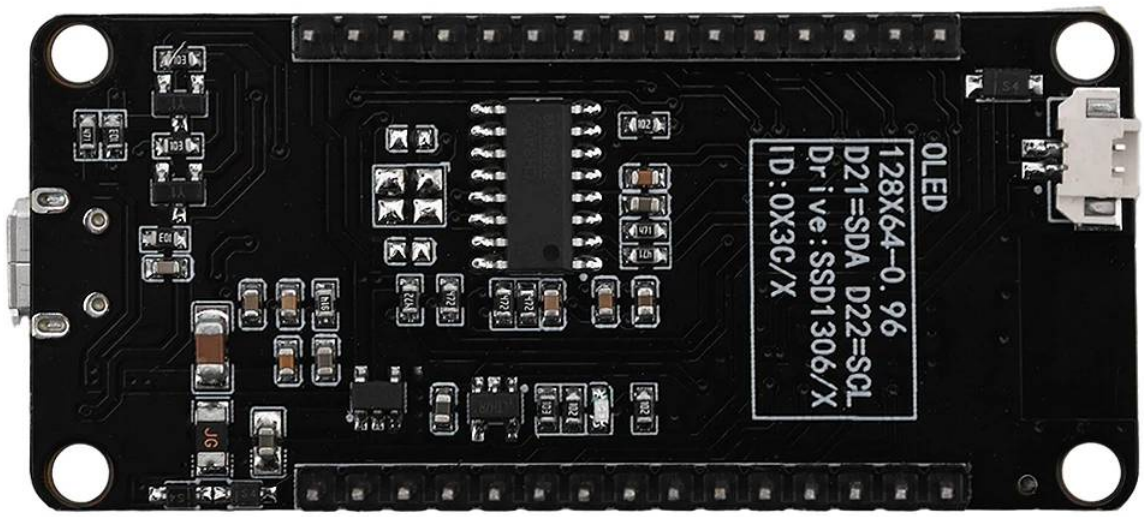
OLED
128X64-0.96
D21=SDA D22=SCL
Drive:SSD1306/X
ID:0X3C/X

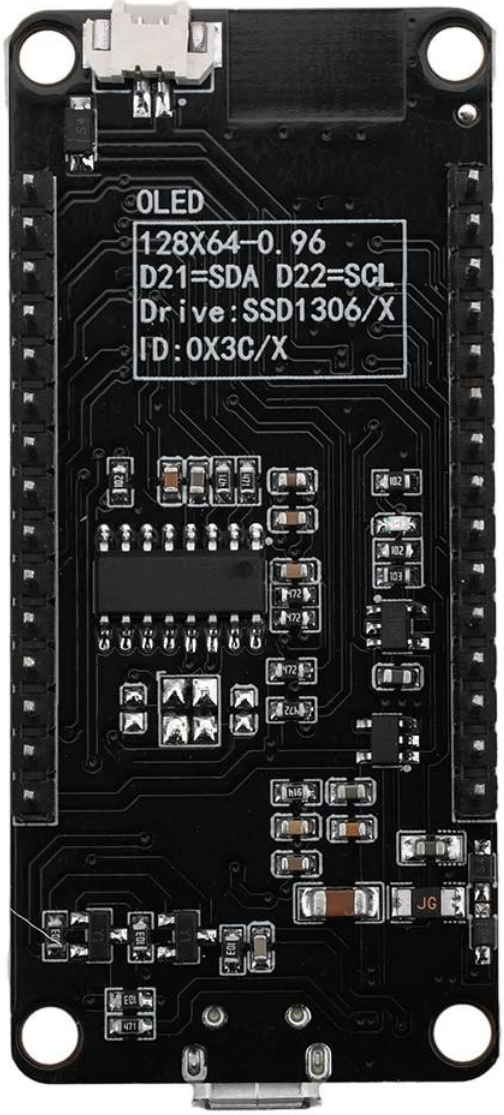

Fixed hole diameter 3.3mm/0.13in
54.3mm/2.14in
28.6mm/1.13in
20.7mm/0.81in
ESP32 12864 OLED
I2C Address=0X3C
D21=GPIO21=SDA
D22=GPIO22=SCL
BOOT
EN

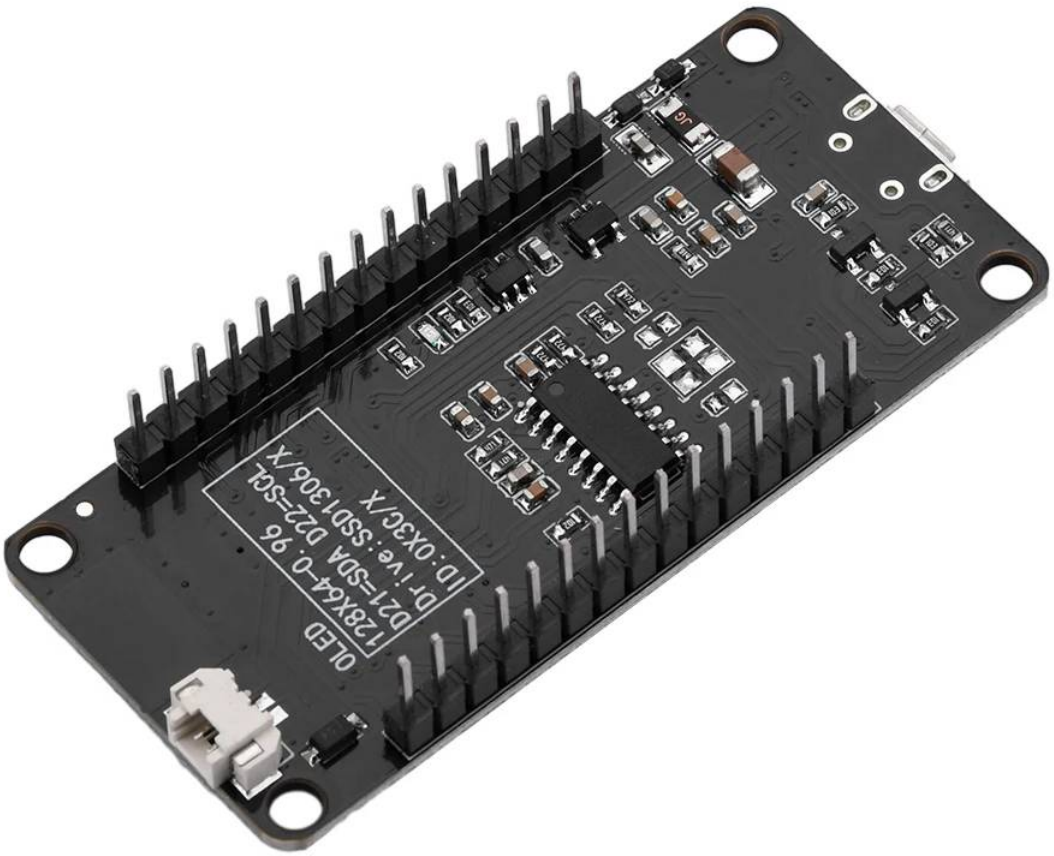

OLED
128X64-0.96
D21=SDA D22=SCL
Drive:SSD1306/X
ID:0X3C/X


OLED
128X64-0.96
D21-SDA D22-SCL
Drive:SSD1306/X
ID:0X3C/X


OLED
128X64-0.96
D21=SDA D22=SCL
Drive:SSD1306/X
ID:0X3C/X


OLED
128X64-0.96
D21=SDA D22=SCL
Drive:SSD1306/X
ID:0X3C/X


OLED
128X64-0.96
D21=SDA D22=SCL
Drive:SSD1306/X
ID:0X3C/X


OLED
128X64-0.96
D21-SDA D22-SCL
Driver:SSD1306/X
ID:0X3C/X

How to place an order



Payment

WebMoney · MasterCard · Western Union Money Transfer · Maestro · Bank Transfer · QIWI · VISA · Boleto

1) We accept Alipay, West Union, PayPal. TT. All major credit cards are accepted through secure payment processor ESCROW.

2) Payment must be made within 3 days of order.

3) If you can't checkout immediately after auction close, please wait for a few minutes and retry Payments must be completed within 3 days.

Shipping Channel

中国邮政 CHINA POST · Singapore POST · EMS · DHL · FedEx Express · UPS

Shipping method	Courier	Shipping Time
Express Shipping	DHL Express	About 3-10 days
	EMS Shipping	About 3-10 days
Standard Shipping (for order over USD5)	Aliexpress Standard Shipping	About 20-45 days
	Registered Air Mail(china post/e packet-only for USA)	About 40-60 days
Economy Shipping (for order under USD5)	Economy Post(finland economy/ SG economy/China economy)	About 40-60 days

Sales Service



Feedback

