

A


B

C

D

E

View from Front side (Scale 8:1)

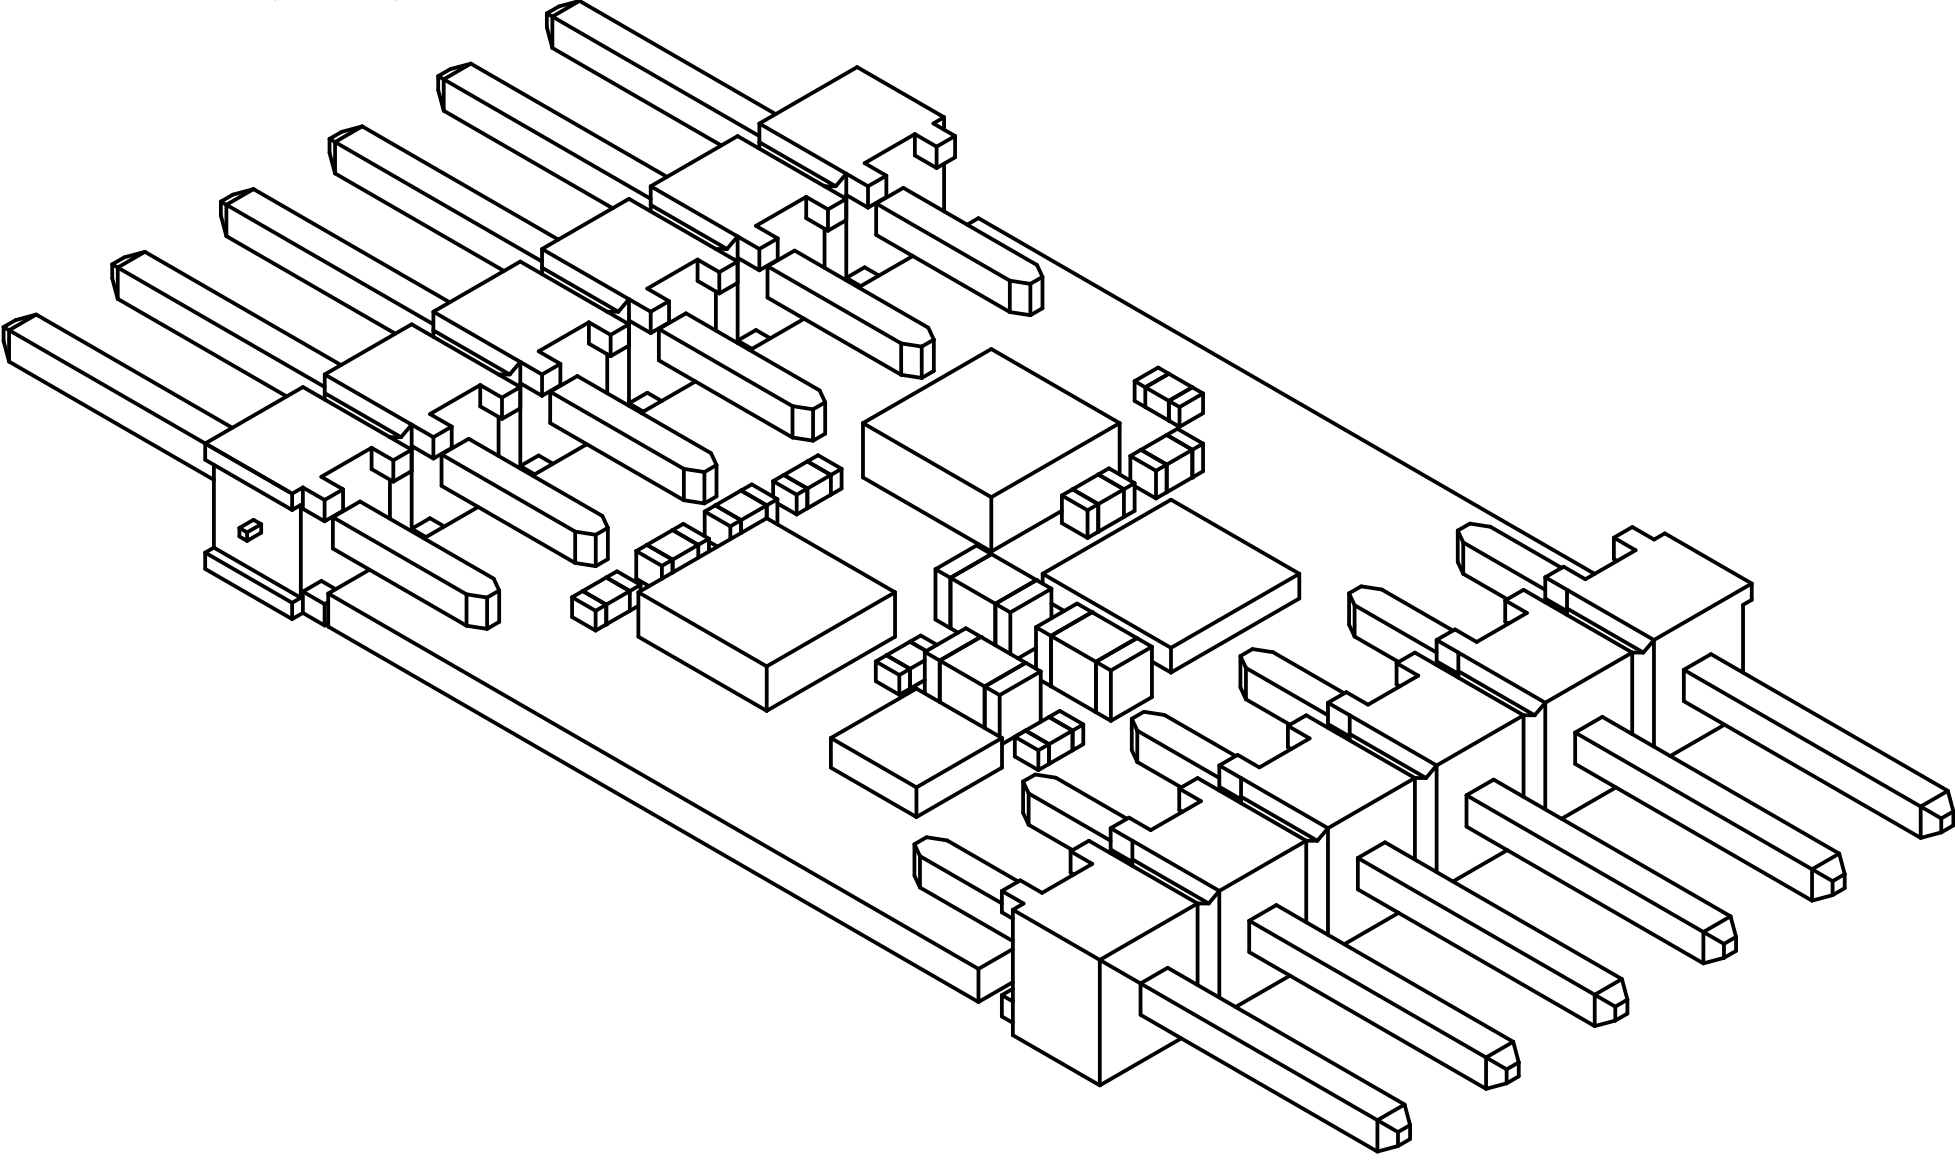

A


B

C


D

E


Dimensions (Scale 4:1)

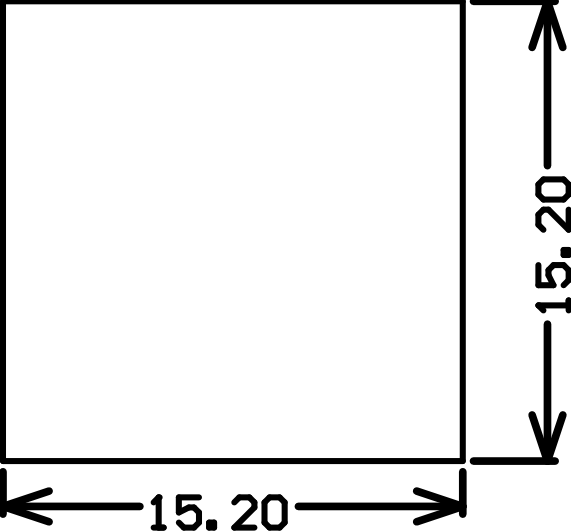


Top Layer (Scale 4:1)

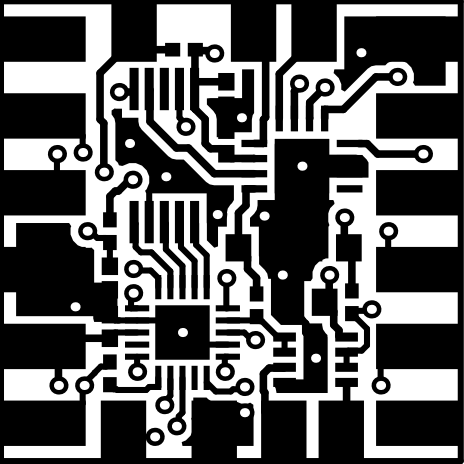

Bottom Layer (Scale 4:1)

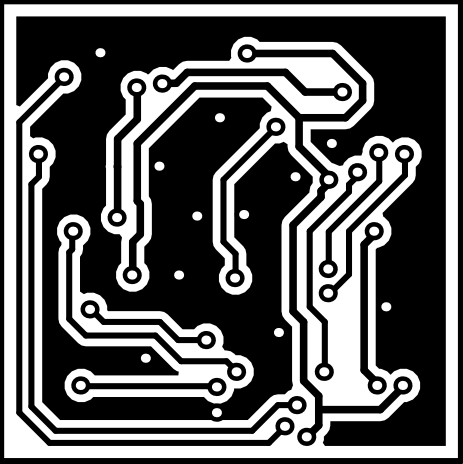

Drill Drawing View (Scale 4:1)

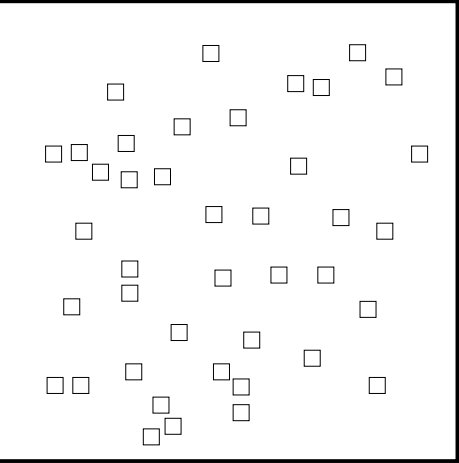


Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
□	41	0.30mm	Plated	
	41 Total			




Layer Stack Legend



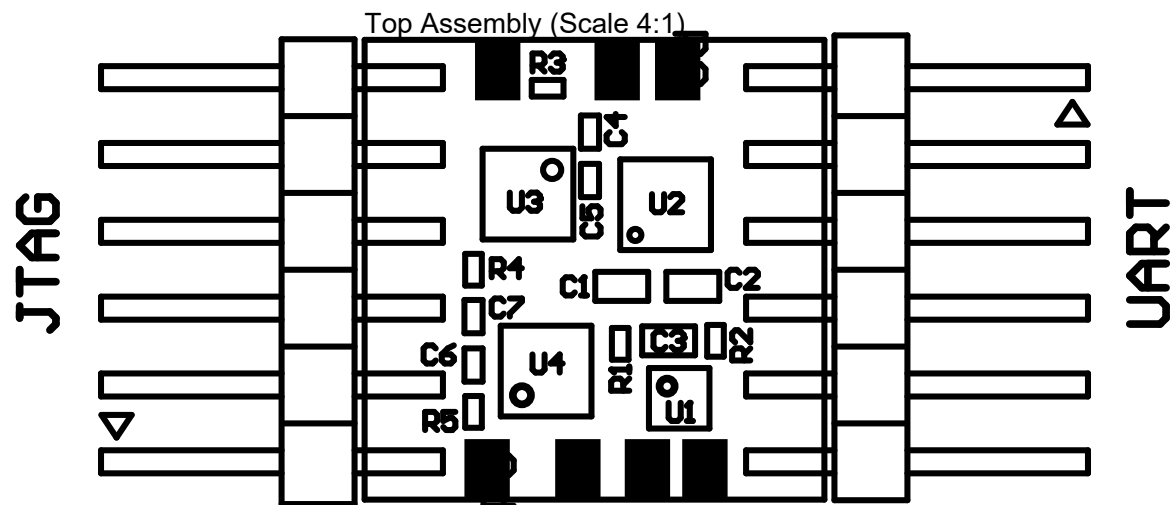

Bill Of Materials

Quantity	Designator	Type	Value	Value2
2	C1, C2	CC0603KRX7R6BB224	220nF	10V
1	C3		1uF	6.3V
3	C4, C5, C6		100nF	50V
1	C7		10nF	50V
7	P1, P2, P3, P4, P5, P6, P7			
2	P8, P9	TSW-106-23-F-S		
2	R1, R2	RG1005P-472-B-T5	4.7k	62.5mW
2	R3, R4	TBD	10k	62.5mW
1	R5	TBD	470E	62.5mW
1	U1	TSV632IQ2T		
1	U2	NX3L4053HR,115		
1	U3	MCP48FVB12-E/UN		
1	U4	PIC16F15245T-I/REB		

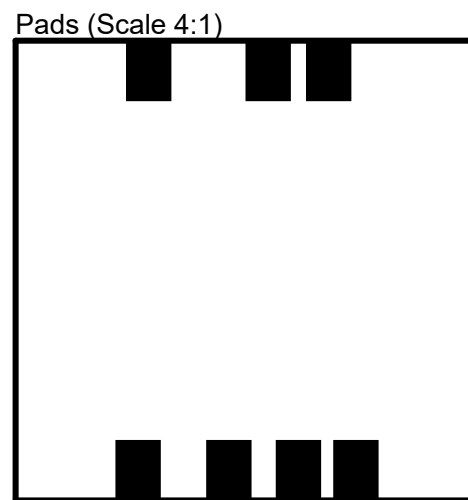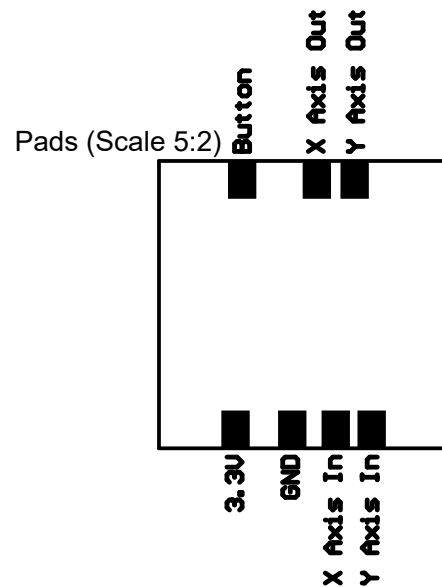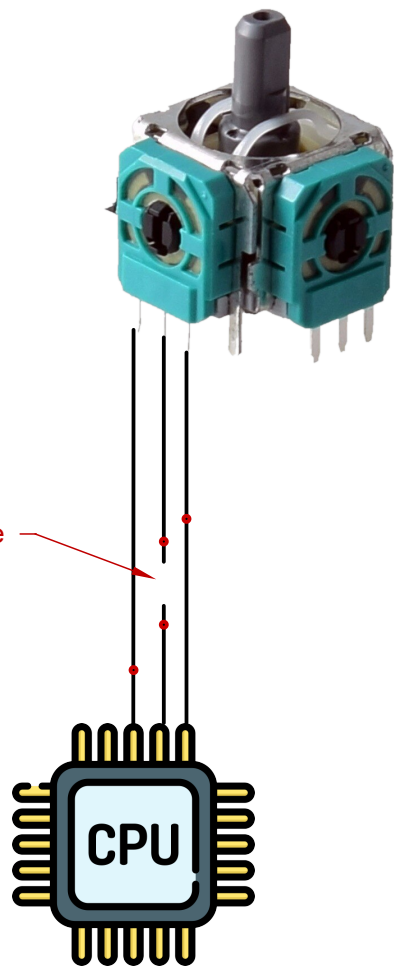

Button to hijack for enabling walk mode.
You can choose any button you want.

