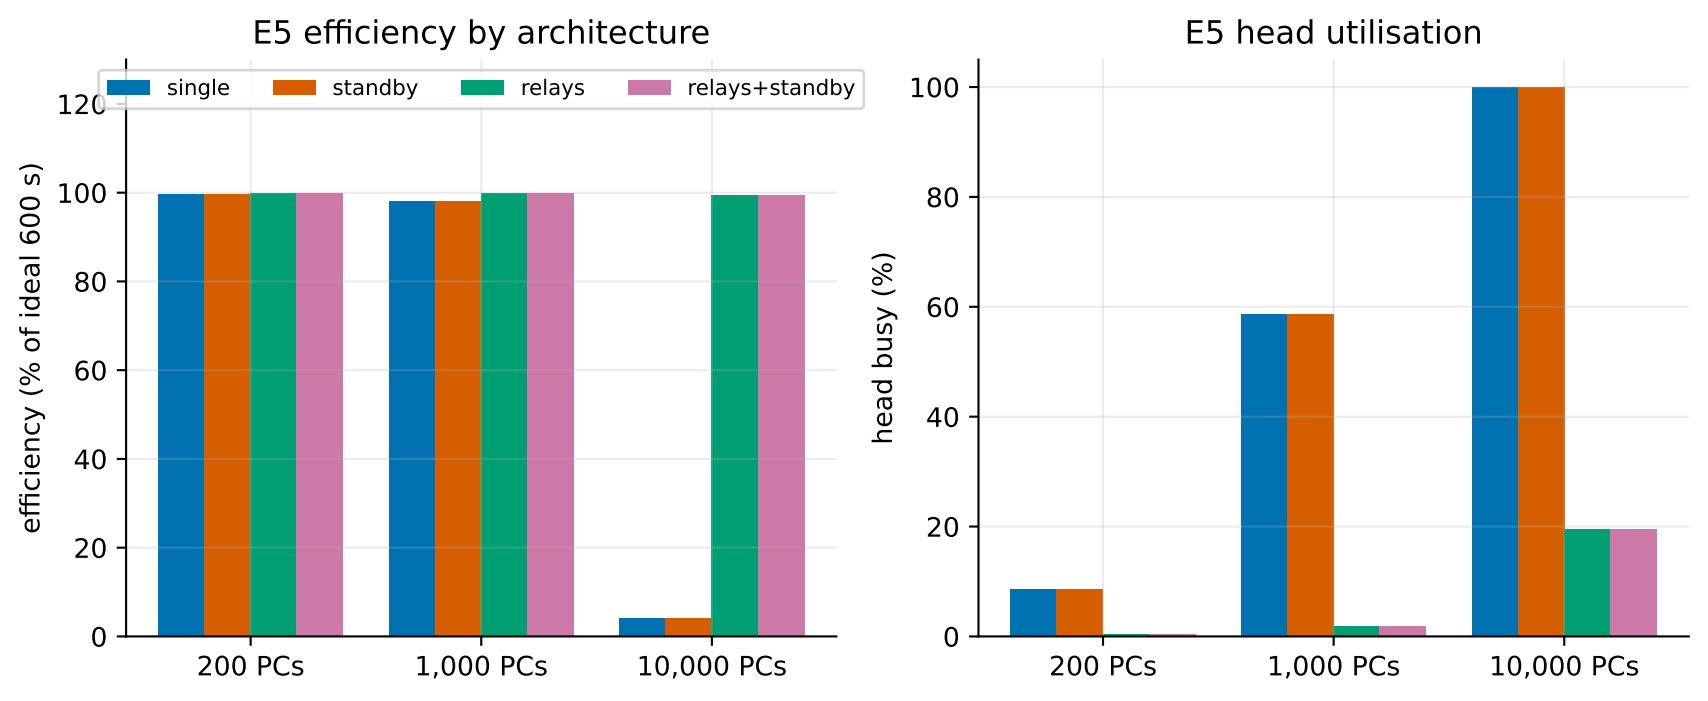
E5 efficiency by architecture
single
standby
relays
relays+standby
efficiency (% of ideal 600 s)
0
20
40
60
80
100
120
200 PCs
1,000 PCs
10,000 PCs
E5 head utilisation
head busy (%)
0
20
40
60
80
100
200 PCs
1,000 PCs
10,000 PCs