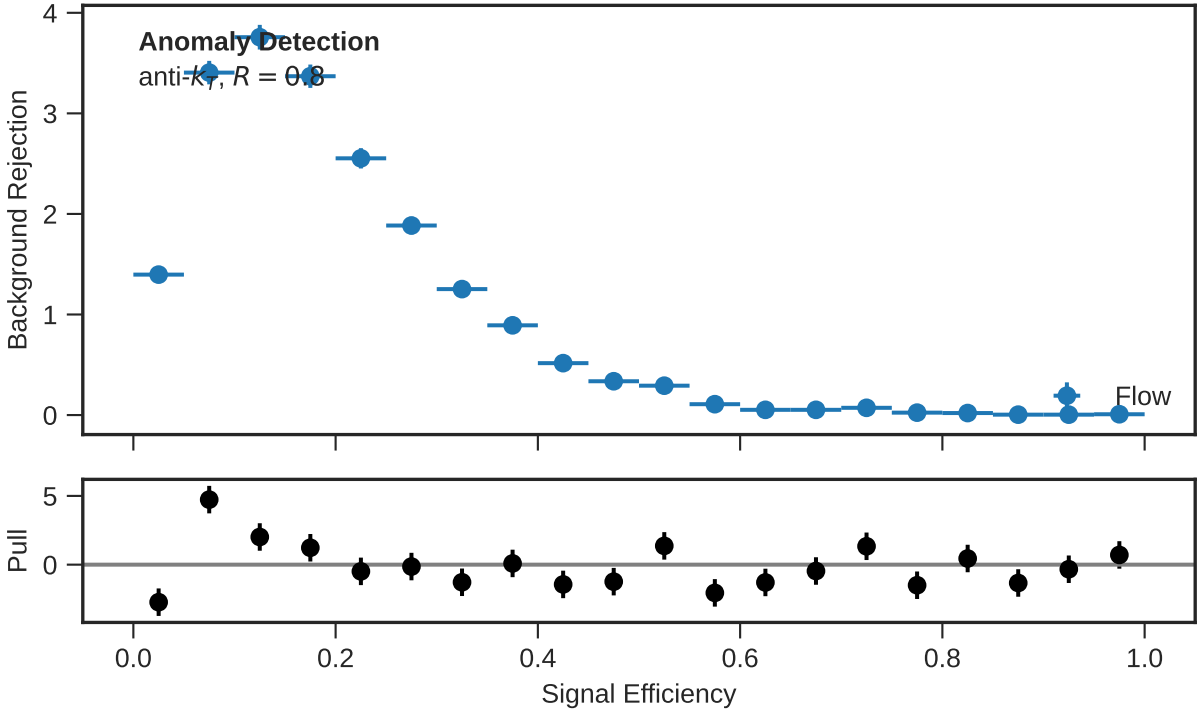
Anomaly Detection
anti-k_T, $R = 0.8$
Flow
Background Rejection
Pull
Signal Efficiency
0
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0