



The Ultimate Loon-E Guidebook

Humber Polytechnic

Version 2.0.0

Date: May 14, 2026

Contents

1	Introduction	6
1.1	Document Conventions	6
1.2	Use of This Document	7
1.3	Development of This Document	7
1.4	Legal	8
1.4.1	MIT License	8
2	Systems Overview	9
3	Software System	9
3.1	Primary Computer	11
3.1.1	ROS2 Humble	11
3.2	Base Station	13
3.3	Base Station Software Stack	13
3.3.1	Previous Implementation	14
3.4	Web Client Application	14
3.5	GUI	17
3.5.1	User Classes and Characteristics	17
3.5.2	User Needs and Considerations	17
3.6	Primary Computer	19
4	ROS2 Design	20
4.1	Website	21
5	Software Development	22
5.0.1	Development Resources	22
5.0.2	Documentation	23
5.0.3	Codebase	23
5.0.4	Communication Channels	24
5.0.5	Contribution Guidelines	24
5.0.6	Code of Conduct	24
5.1	Active Development	25
5.1.1	Primary Computer Development	25
5.2	Remote Connections	25
5.2.1	TailScale Connection	26
5.2.2	RustDesk Connection	26
5.3	Running the Software	26
5.4	Troubleshooting	28
5.4.1	Camera not connecting	28
5.4.2	ROS2 nodes not communicating	29
5.4.3	ROS2 topic list waiting indefinitely	29
5.4.4	RVIZ not displaying data	30
5.4.5	Simulation issues	30
5.5	Docker Use	31
5.5.1	Images	31

5.5.2	Volumes	31
5.5.3	Hardware & Device Volumes	33
5.5.4	SDK Configuration Volumes	33
5.5.5	Display & X11 Volumes	33
5.5.6	Options	34
5.5.7	Environment Variables	34
5.6	Example	34
5.7	Colcon Setup	35
5.7.1	Background	35
5.7.2	Requirements	35
5.7.3	Installation Linux	35
5.7.4	Installation macOS	35
5.7.5	Installation Windows	35
5.8	Environment Variables Setup	36
5.8.1	Domain ID	36
5.8.2	Localhost Only	36
5.8.3	RMW Implementation	36
5.9	Example	36
5.9.1	Linux	36
5.9.2	Windows	37
5.9.3	Check Environment Variables	37
5.9.4	Troubleshooting	38
5.10	Loon Env	38
5.10.1	What It Does	38
5.10.2	Building with LoonE	38
5.10.3	Building with simulator with LoonE	39
5.10.4	Running with LoonE	39
5.10.5	Stopping with LoonE	39
5.10.6	Cleaning with LoonE	39
5.10.7	Development in containers	39
A	Glossary	41
B	Bibliography	43

List of Figures

1	System Context Diagram	9
2	Level 1 Data Flow Diagram	10
3	Level 1.1 Data Flow Diagram for Primary Computer	11
4	Software Architecture Diagram	12
5	Base Station System Diagram	13
6	Web Client Application GUI Mockup	15
7	Software and tools required for development.	22
8	Code of Conduct	25

List of Tables

1	Primary Computer Software Stack	11
2	Primary Computer ROS2 Nodes	20
3	Current Primary Computer ROS2 Nodes Data Distribution	20
4	Proposed Computer ROS2 Node Data Distribution	20
5	Docker Hardware Volumes for Zedx SDK	33
6	Docker SDK Configuration Volumes for Zedx SDK	33
7	Docker Display Volumes for Zedx SDK	33
8	Docker Options for ROS 2 Development	34
9	Environment Variables for Docker ROS 2 Development	34

1 Introduction

Humber ASV is a multidisciplinary team of passionate Humber Polytechnic students and professionals dedicated to advancing autonomous maritime technology.[11] The team is focused on designing, building, and operating their autonomous surface vehicle (ASV) to contribute to the field of maritime robotics. The Loon-E ASV is one of the key projects undertaken by HumberASV, showcasing the team's commitment to innovation and excellence in autonomous maritime technology.[11] This document serves as a comprehensive guidebook for the Loon-E ASV, providing detailed information on its design, operation, and maintenance. It is intended to be a valuable resource for stakeholders and developers involved in the Loon-E project, offering insights into the ASV's capabilities, specifications, and best practices for its use and upkeep. The on-board computer system includes hardware components such as the Jetson Orin computer, Zedx camera, and various student-lead designs [23].

Document Conventions

Throughout this document, we will use the following conventions to highlight information:

Infobox Used to provide additional information or context about a topic.

Warning Box Used to highlight important warnings or cautions that users should be aware of.

Note Box Used to provide additional notes or clarifications about a topic.

Footnotes Used to provide additional information or references related to specific points in the text.

Hyperlinks Used to direct readers to external resources or related documents for further information. Hyperlinks are displayed in a distinct blue color to differentiate them from the base text.

INFO

This is an infobox. It is used to provide additional information or context about a topic.

WARNING

This is a warning box. It is used to highlight important warnings or cautions that users should be aware of.

NOTE

This is a note box. It is used to provide additional notes or clarifications about a topic.

Use of This Document

This document is intended to be a single source of truth for all information related to the Loon-E ASV. It is designed to be comprehensive and detailed, providing all necessary information for stakeholders and developers involved in the project. Readers are encouraged to read through sections of interest instead of the entire document, as it is structured in a way that allows for easy navigation to specific topics. The document is also intended to be a living document, meaning that it will be updated and revised as new information becomes available or as the project evolves. Users are encouraged to refer back to this document regularly to stay informed about the latest developments and updates related to the Loon-E ASV.

Development of This Document

This document is developed using LaTeX, a typesetting system that allows for the creation of professional and well-structured documents. While there is a technical learning curve associated with using LaTeX, it offers significant benefits in terms of document organization, formatting, and the ability to easily include complex elements such as figures, tables, and references. Most of the content is written in Latex files and then compiled into a PDF format for distribution. The source files are organized in a modular fashion for easy editing and updating as needed.

Legal

This document is a documentation file licensed under the MIT License, which allows for free use, modification, and distribution of the content, provided that the original copyright notice and permission notice are included in all copies or substantial portions of the Software.

INFO

The documentation is associated with the Software under MIT License, which means that the documentation itself is licensed under MIT and may contain references to the software that is also licensed under MIT. Users should ensure that they comply with the terms of the MIT License when using or distributing the software and its associated documentation.

1.4.1 MIT License

Copyright (c) 2026 HumberASV
Copyright (c) 2026 Carson Fujita

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

2 Systems Overview

The Loon-E ASV is an autonomous surface vehicle designed to operate on water. It is not equipped to be underwater; please don't try to submerge it. Loon-E is designed to be modular and adaptable, allowing for various configurations and payloads to suit different tasks as competition requirements evolve [23].

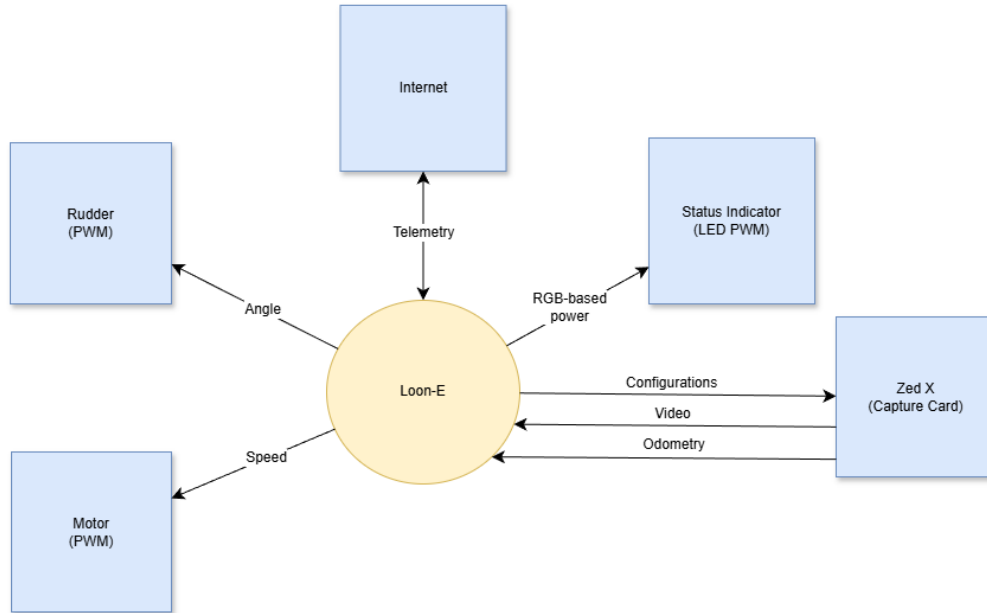


Figure 1: System Context Diagram

3 Software System

The software system of the Loon-E ASV is responsible for controlling the vehicle's operations, including navigation, sensor data processing, and communication. The entire system can be illustrated in Figure 2, which illustrates a 3 process system consisting of a base station, the primary computer, and a web client. These 3 components work together to realize the software system of the ASV.

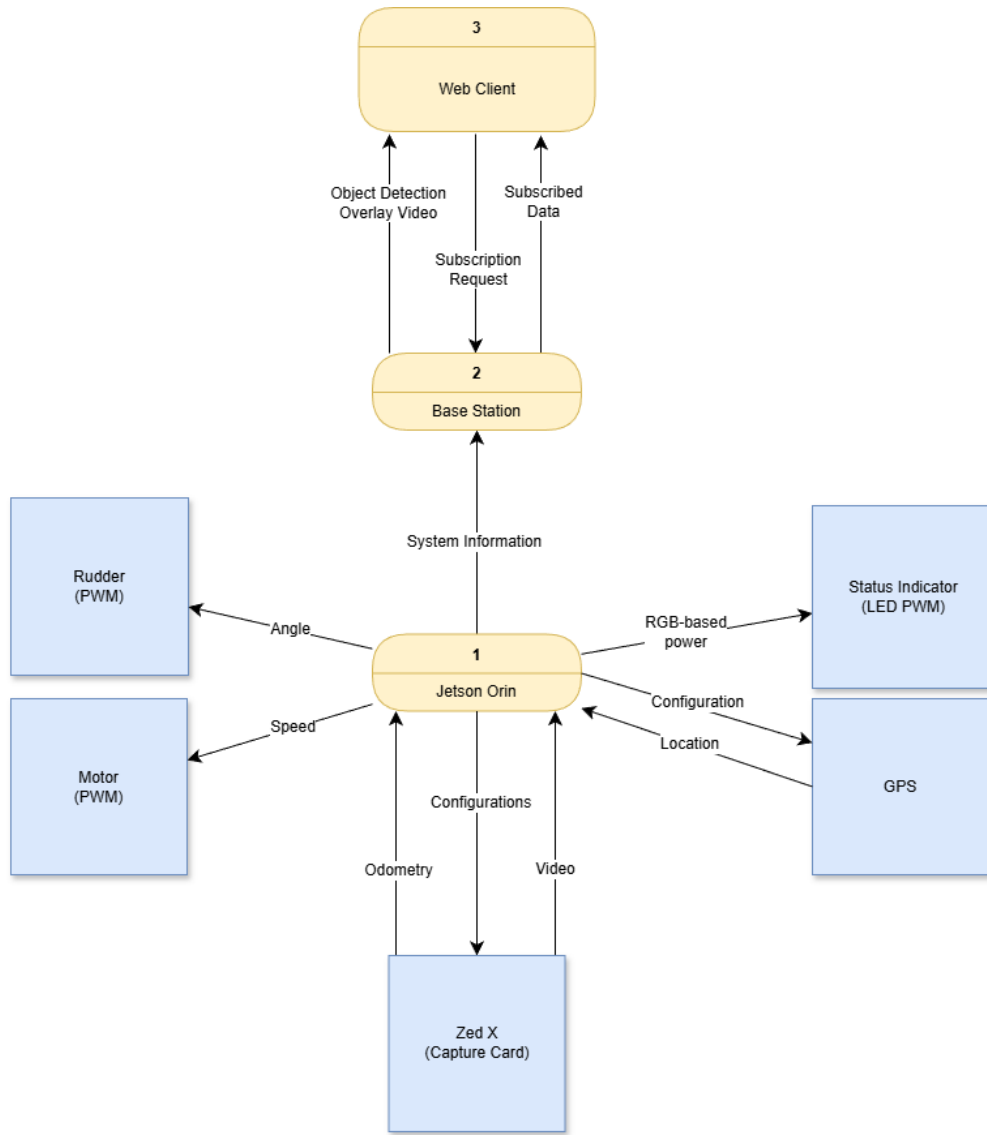


Figure 2: Level 1 Data Flow Diagram

The Loon-E ASV system sends a variety of data which need to be remotely accessed and visualized by users. This data must be transmitted from the ASV to the Base Station, which will then be accessed by users through a web client application. This data is visualized by our [Data Flow Diagram \(DFD\)](#) in Figure 2.

Primary Computer

The primary computer is responsible for controlling the ASV's operations, including navigation, sensor data processing, and communication.

Technology	Purpose
ROS2 Humble	Robotics middleware for communication and control
Ubuntu Jazzy Jellyfish	Operating system for the primary computer
Cyclone DDS	(ROS middleware) Chosen data distribution service ¹
Zedx SDK	Software development kit for the Zedx camera
Docker	Containerization platform for software deployment

Table 1: Primary Computer Software Stack

3.1.1 ROS2 Humble

ROS2 Humble is a robotics middleware that provides a framework for building robot applications. It offers a collection of tools, libraries, and conventions that simplify the development of complex robotic systems [21]. We designed a series of nodes—processes that perform specific tasks—to run on the primary computer, which communicate with each other using ROS2 topics and services. Figure 3 illustrates a level 1.1 data flow diagram for the primary computer, which breaks down the primary computer process from Figure 2 into its constituent nodes and their interactions.

NOTE

Data flow diagrams illustrate the flow of data between processes and data stores in a system.

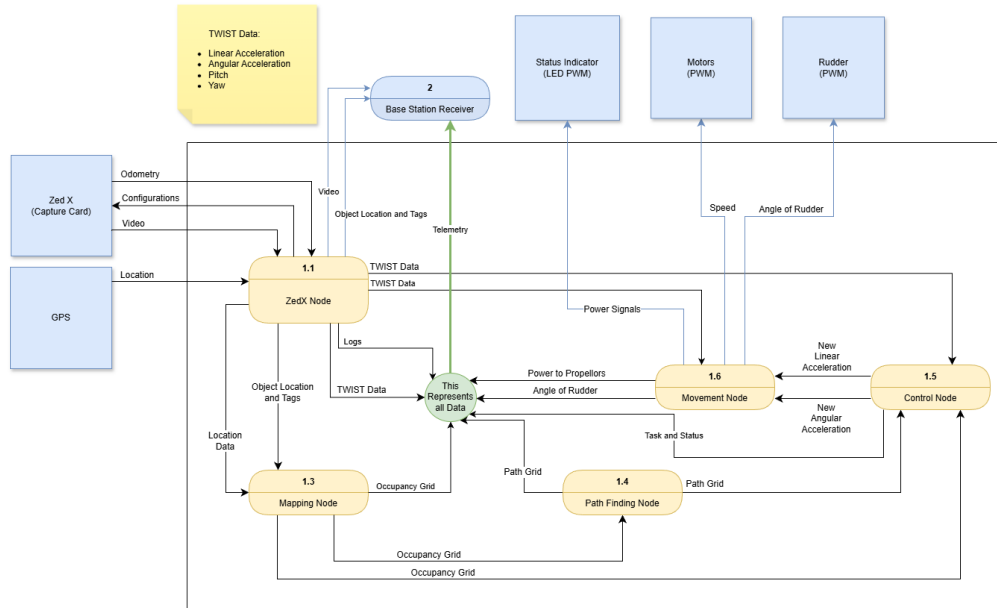


Figure 3: Level 1.1 Data Flow Diagram for Primary Computer

¹ROS2 supports multiple DDS implementations, however, Stereolabs, the manufacturer of the Zedx camera, only provides support for Cyclone DDS [25] [17].

To test and send data from the primary computer to the base station, we set up a ROS2 publisher node that sends simulated sensor data to a ROS2 subscriber node running on the base station. Additionally, for testing purposes, we set up a ROS2 subscriber node on a secondary server computer that runs a simulation on Isaac SIM. More information on development and testing can be found in the development section of this document (Section 5).

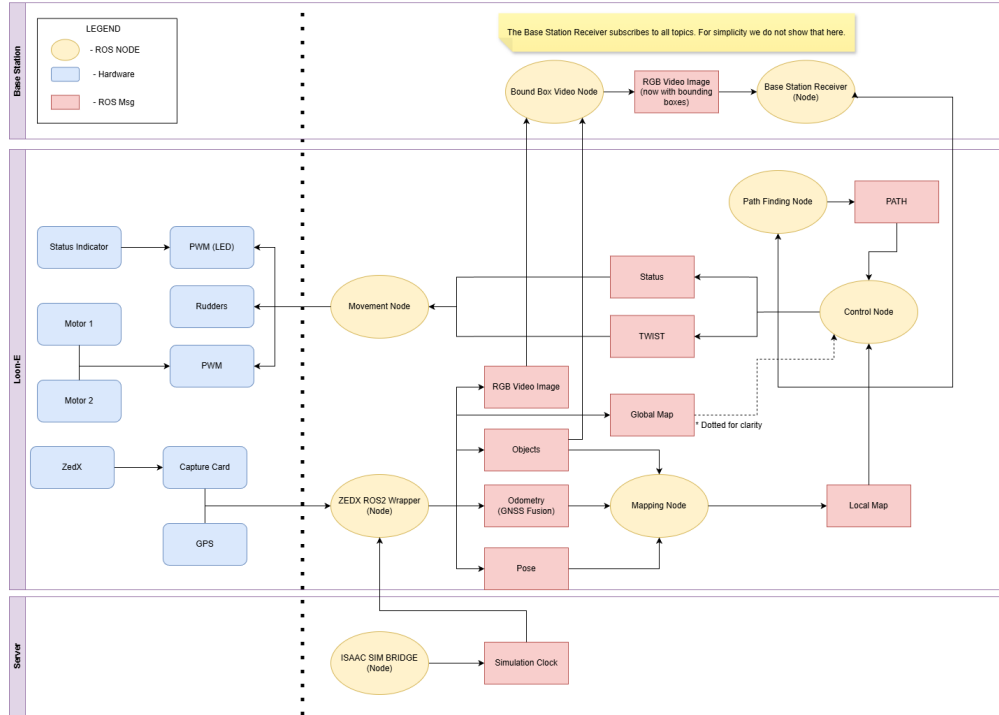


Figure 4: Software Architecture Diagram

Figure 4 demonstrates the hardware which processes (nodes) run on, and the data flow between both hardware and software components.

The web client provides a user interface for monitoring the ASV remotely. The base station is responsible for receiving data from the ASV for diagnostic monitoring and hosting the web client.

Base Station

The Base Station is a critical component of the Loon-E ASV's software system, responsible for receiving data from the ASV and providing it to users on a web client application. It acts as an intermediary between the ASV and the users, allowing for remote access to the ASV's data and operations.

The system will implement the connected access point (TP-Link Omada AC1200) to become a wireless access point allowing the ASV to connect to the base station. The TP-Link Omada access point provides the wireless link between the ASV and the local network. The access point connects by Ethernet to a switch, which uplinks to a router or Internet gateway. The base station computer stays on the same network and relays ASV data to the web client, but it does not control the ASV or perform navigation. In other words, The base station acts as a server that receives ASV data and serves it to the web client, while the access point, switch, and router provide the network connectivity. It is designed to meet the specifications required for participation in maritime robotics competitions such as RoboBoat and Njord

Base Station Software Stack

The Base Station can be a Windows, Linux, or macOS computer running ROS2 Humble, which is the same version of ROS2 used on the ASV's computer.

! WARNING

The base station must be on the same network, DDS, Domain ID, and ROS2 version as the ASV's computer to receive data from the ASV.

Using CycloneDDS as the data distribution service, the base station will subscribe to all topics published by the ASV, allowing it to receive and process all relevant data from the ASV's operations. The base station will then relay this data to the web client application for visualization and monitoring by users.

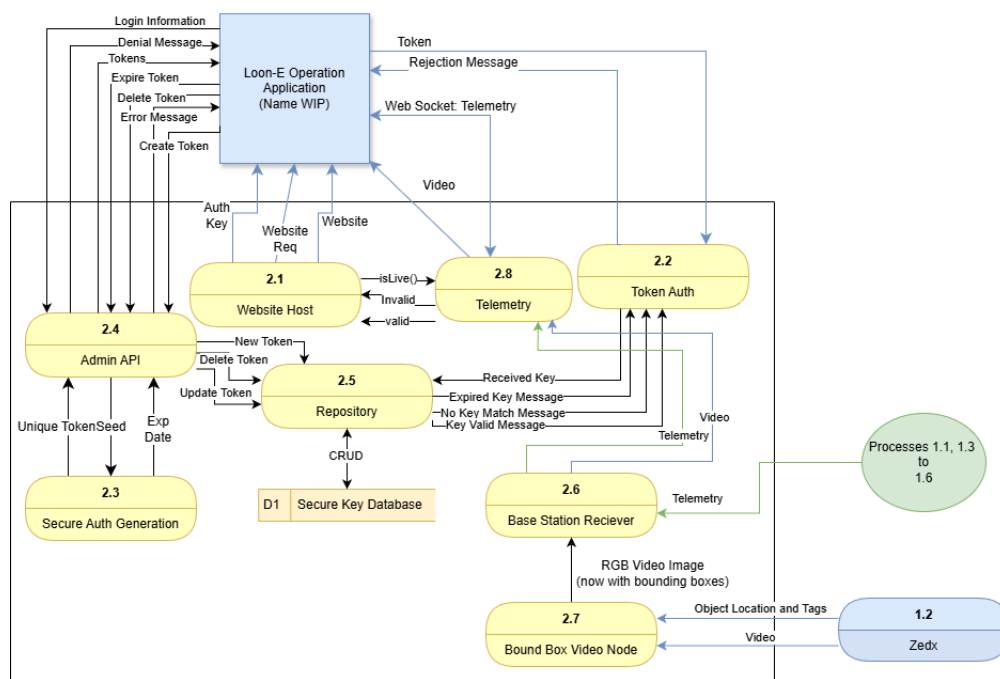


Figure 5: Base Station System Diagram

i INFO

The base station is not responsible for controlling the ASV or computing navigation paths; it only receives and displays data from the ASV.

3.3.1 Previous Implementation

Previous implementation of the basestation used MQTT and Django running through containers to receive data from the ASV and serve it to the web client application. However, this approach was found to be less efficient and more complex than using ROS2's built-in communication capabilities with CycloneDDS. By using ROS2 and CycloneDDS, we can simplify the architecture of the base station and improve the performance of data transmission between the Base Station and the ASV. Additionally, we had difficulty with RTP streaming of a misunderstanding with the Zedx camera feed due to problems with the ROS 2 Zed Wrapper's streaming.

Turns out the ROS 2 Zed Wrapper streaming capabilities are for streaming to ROS 2 topics, not for streaming video feeds over RTP as we had initially thought[29]. This led to complications in our previous implementation, as we had designed the architecture around the assumption that the Zedx camera feed could be streamed over RTP to the base station.

New addition will build on these lessons through the following changes to the architecture:

ROS2 with CycloneDDS Using ROS2's built-in communication capabilities with CycloneDDS allows for more efficient and streamlined data transmission between the ASV and the base station, eliminating the need for additional middleware like MQTT.

Web Client Application The web client will be simplified to Flask to reduce technical complexity.

MQTT Removal MQTT will be removed from the architecture to simplify the communication between the ASV and the base station, as ROS2 with CycloneDDS can handle all necessary data transmission without the need for additional middleware.

RTP Streaming Removal The RTP streaming of the Zedx camera feed will be removed due to the current limitations of the ROS 2 Zed Wrapper's streaming capabilities, and instead, we will explore alternative methods for transmitting camera data from the ASV to the base station.

Web Client Application

The web client application will display telemetry data in a user-friendly interface—following figure 6—allowing users to monitor the ASV's status and performance during operations

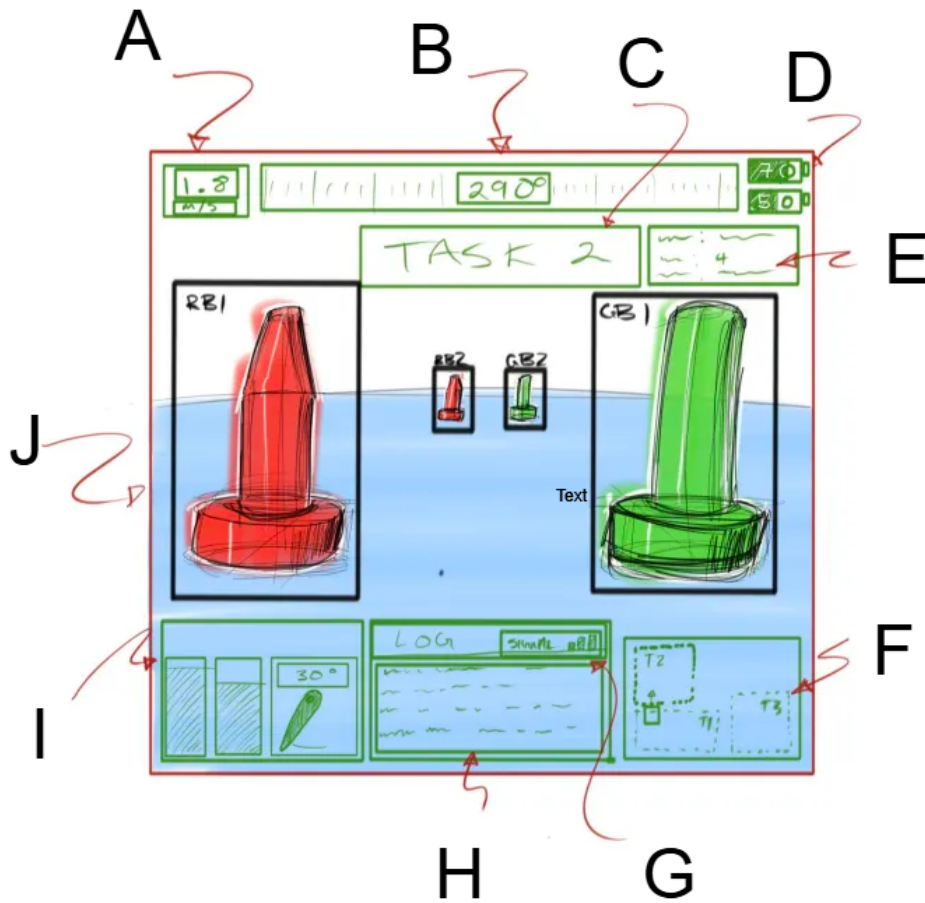


Figure 6: Web Client Application GUI Mockup

In the Figure 6 (above), alphabetical labels correspond to the following data displayed on the web client application:

- A** Speedometer
A speed over ground measurement in meters per second.
- B** COG heading
Course over ground (COG) with trail vs plot of ideal route given by GNSS points to compare.
- C** Task
The task name.
- D** Batteries: Motor and System in percentage
Power bars with percent detailing the power in two battery systems in Loon-E.
- E** Task Data
Contains data relevant to the current task such as a status indication, Latitude, Longitude.
- F** Map
Shows plot of ideal route given by GNSS points, task locations and the boat.

G Signal Strength

H Log

Log from the Loon-E.

I Power and Rudder Panel

Sideby side power bars detailing the power allocation in the propoller.

J Recieved Image Recognition

Object Detection windows from the Loon-E. ²

The web client application will be accessible through a web browser and will not require any additional software installation for user access; however, the use of React for dynamic content and interactive features may require users to have a modern web browser that supports React applications.

INFO

Web Client users will also require the need of an internet connection to access any third party resources used in the web application, such as fonts, icons, or external APIs.

²To reduce processing load the ASV will only send the video feed, and locations of detected objects, the Base Station will be responsible for combining the two sources into one video feed and sending the results to the web client application for display.

GUI

The GUI component is the visual component of the [Loon-E system](#). It is responsible for representing the data visually, as shown in Figure 6, and it must match the Njord GUI competition requirements [15]. The GUI is implemented as an application in a [web client](#). It communicates with the [base station](#) to receive data from the ASV and display it to users.

3.5.1 User Classes and Characteristics

The primary users of the system are members of the following:

Humber ASV Team The Humber ASV team is responsible for developing, testing, and operating the Loon-E ASV. They will use the base station and web client to monitor the ASV’s status and performance during development and testing, as well as during competitions. The team will also use the base station to receive data from the ASV for diagnostic purposes and to analyze the ASV’s performance.

Competition Judges Judges at maritime robotics competitions such as RoboBoat and Njord will use the web client application to monitor the ASV’s status and performance during competitions. They will evaluate the ASV’s performance based on the data displayed on the web client, such as speed, heading, task completion, and other relevant metrics.

Competing Teams Other teams participating in maritime robotics competitions may also use the web client application to monitor their own ASVs if they are using a similar architecture, or to compare their performance with that of Loon-E. They may also use it to observe Loon-E’s performance during competitions.

Sponsors and Stakeholders Sponsors and stakeholders of the Humber ASV team may also be interested in monitoring the ASV’s performance during testing and competitions. They may use the web client application to view telemetry data and assess the progress of the project.

3.5.2 User Needs and Considerations

These users interact with the web client application to monitor the ASV’s status and performance during operations.

The design must address the following user needs:

- Support users with varying levels of technical expertise.
- Remain user-friendly and accessible, as required by Njord [15].
- Accommodate multiple simultaneous users, especially during competitions.
- Support diagnostic use in both ISAAC Sim and real-life testing for developers and testers.
- Present information in a visually appealing and informative way for sponsors and other stakeholders.

The web client does not allow control of the ASV, so non-technical users can share the same level of access without role-based differentiation. All non-technical users can view the same data and features, regardless of affiliation with Humber ASV. Technical users, such as the Humber ASV team, require access to create and manage secure tokens for user access; this can be done through the admin webpage of the web client application, which is accessible to technical users with valid credentials. The admin webpage allows technical users to create, revoke, and expire tokens as needed to maintain security and control access to the application.

i NOTE

the data and features available on the web client application are the same for all users, regardless of their role or affiliation with Humber ASV.

The user experience focuses on clear, accessible ASV status and performance information rather than role-specific interfaces.

Primary Computer

The primary computer is the main processing unit of the ASV, responsible for controlling the vehicle and processing data from its sensors. The software running on the primary computer is developed using ROS 2, a popular robotics middleware that provides a framework for building robot applications [20].

We use the Jetson Orin Nano as the primary computer for Loon-E.

Details on development for the primary computer can be found in section 5.1 which covers the active development process for the software team, including how to set up the development environment, how to run the software, and how to contribute to the project. It also includes any relevant documentation or resources for developers working on the primary computer software.

4 ROS2 Design

We are currently undergoing changes to our ROS2 Architecture to better fit our needs and constraints. The current architecture consists of 7 nodes: Control, Map, Movement, Planning, Base Station, ROS2 Publish Clock, and Zedx Camera. The data distribution between these nodes is illustrated in Table 3. The proposed architecture consists of 8 nodes: Control, Map, Movement, Base Station, ROS2 Publish Clock, Bound.Box.Video, and Zedx Camera. The data distribution between these nodes is illustrated in Table 4.

Node Name	Purpose
Control Node	Executes control logic and navigation commands
Map Node	Maintains and updates local environmental map
Movement Node	Manages motor control and vehicle movement
Planning Node	Computes navigation paths to destination
Base Station Node	Monitors and logs all system data
ROS2 Publish Clock Node	Synchronizes simulation timing across nodes
Zedx Camera Node	Processes stereo vision and object detection

Table 2: Primary Computer ROS2 Nodes

Node Name	Subscriptions	Publications
Control	map (local), objects, locations	PWM
Map	obstacles, locations	map (local)
Movement Node	PWM	not implemented
Base Station	ALL	None
Planning node	map (local), destination	path
ROS2 Publish Clock	None	clock
Zedx Camera	clock ³	objects, pose, image_rect_color, map (global)

Table 3: Current Primary Computer ROS2 Nodes Data Distribution

i NOTE

Movement needs pose and odometry data to move. The Zedx camera needs to publish objects and mapping receive it.

Node Name	Subscriptions	Publications
Control	map (local), map (global), objects	twist, status
Map	pose, odom, objects ⁴	map (local)
Movement Node	twist, status	health (movement), power
Base Station	ALL	None
ROS2 Publish Clock	None	clock
Zedx Camera	clock	objects, pose, image_rect_color, map (global)
Bound.Box.Video	objects, image_rect_color	video_feed

Table 4: Proposed Computer ROS2 Node Data Distribution

³The Zedx Camera node subscribes to the clock topic to synchronize its data publishing with Isaac SIM.[26]

⁴Zedx Objects contains location and classification data [24].

Website

HumberASV's website is a component for the RoboBoat competition [\[16\]](#). It details our team, our ASV, and our software, and provides a way for the public to learn about our project and follow our progress. The website is built using modern web technologies (Vite and React) and is designed to be responsive and user-friendly. It includes sections on our team members, our ASV's design and capabilities, and technical report.

5 Software Development

This section provides information on how to set up the development environment, run the software, and contribute to the Loon-E ASV project. It also includes relevant documentation and resources for developers to effectively contribute to the project.

In order to contribute to the project, developers will need to set up their development environment with the necessary software and tools. The required software and tools for development are listed in Figure 7

- [GitHub](#)
- [Tailscale](#)
- [Rust Desk](#)
- [Git](#)
- [ROS2 Humble](#)
- [Stereolab's ZedSDK 5.3](#)
- [Putty](#) (optional, and for Windows only)
- [FileZilla](#) (optional, and for Windows only)
- [Python 3.10](#)
- [Discord](#) (Used for communications)
- [LiveTeX](#) (distribution of LaTeX)
- [NPM](#) (may change later)
- [Microsoft Teams](#) (Primary Document Sharing)
- [Docker](#)
- Any preferred LaTeX editor
- Any Preferred IDE
- Any Standard Preferred Web Browser

Figure 7: Software and tools required for development.

5.0.1 Development Resources

A few primary resources are available for you to get started with development:

- documentation
- codebase access
- communication channels

At bare minimum, you'll require Latex for in-depth documentation (I.E this documentation), an IDE for code development, and a web browser for accessing the codebase and communication channels. Further details on what tools you need are in Figure 7.

5.0.2 Documentation

Documentation is split into various channels, each serving a different purpose.

This Document This public document serves as the primary source of information for the Loon-E ASV project, providing comprehensive details on the design, operation, and maintenance of the ASV. It is intended to be a valuable resource for stakeholders and developers involved in the project. It is designed to be modular and easily navigable, allowing readers to quickly find the information they need and so multiple developers can work on different sections without conflicts.

GitHub Wiki The public GitHub Wiki serves as a collaborative platform for developers to share information, best practices, and updates related to the project. It is a living document that evolves with the project and provides a space for developers to contribute their knowledge and insights.

GitHub README The public GitHub README file provides an overview of the project, including its purpose, features, and instructions for getting started. It serves as an introduction to the project for new developers and provides essential information for understanding the project's goals and structure.

GitHub Issues and Pull Requests GitHub Issues and Pull Requests serve as a platform for developers to report bugs, suggest features, and contribute code to the project. They provide a structured way for developers to collaborate and track the progress of the project.

GitHub Project Board The GitHub Project Board is used only for Software related project management and task tracking. It provides a visual representation of the project's progress, allowing developers to see what tasks are in progress, what tasks are completed, and what tasks are upcoming. Debate exists on whether this or Microsoft Teams Kanban board should be the primary project management tool, but for now, the GitHub Project Board is used for software-related tasks, while the Microsoft Teams Kanban board is used for everything else.

Teams Onedrive The Teams Onedrive serves as a centralized repository for project-related documents, including design files, meeting notes, and other resources. It provides a secure and organized space for storing and sharing project materials among team members. You'll need to be added to the Teams Onedrive by a project manager to access it, so reach out to one if you need access (see discord).

5.0.3 Codebase

GitHub Repository The GitHub repository serves as the primary codebase for the Loon-E ASV project, hosting all source code, and some related resources; however, it is recommended to use this document for a single source of truth. It provides a collaborative platform for developers to contribute code, track changes, and manage the project's development.

Branching Strategy No current branching strategy exists, but we are in the process of implementing one. The proposed branching strategy includes a main branch for stable releases, a development branch for ongoing work. This strategy helps to organize the codebase and facilitate collaboration among developers.

Code Reviews Code reviews are conducted through GitHub Pull Requests, allowing team members to review and provide feedback on proposed changes before they are merged into the main codebase. This process helps to maintain code quality and ensure that changes align with the project's goals and standards.

Pull Request Process The pull request process involves creating a new branch for the proposed changes, making the necessary code modifications, and then submitting a pull request for review. Team members can comment on the pull request, suggest improvements, and ultimately approve or request changes before the code is merged into the main branch. It is important to follow the established pull request process to ensure that contributions are properly reviewed and integrated into the project.

5.0.4 Communication Channels

Discord The private Discord server serves as the primary communication channel for the Loon-E ASV project, allowing team members to collaborate, share updates, and discuss project-related topics in real time. It provides a platform for developers to ask questions, share ideas, and stay connected with the rest of the team. You'll need to be added to the Discord server by a project manager to access it, so reach out to our email.

Email Email is used for formal communications and is not for development discussions. It is used mostly for communicating with external stakeholders; however, if you wish to join us then you can reach out to our email and we will get back to you as soon as possible. Our email is: mechatronicsclub@humber.ca

Microsoft Teams Microsoft Teams is used for document sharing and collaboration among team members. It provides a centralized space for storing and sharing project-related documents, including design files, meeting notes, and other resources. It also tracks the team Kanban board, which is used for project management and task tracking. You'll need to be added to the Microsoft Teams by a project manager to access it, so reach out to one if you need access (see discord).

5.0.5 Contribution Guidelines

Refer to each github repository for specific contribution guidelines, but in general, contributions to the project should follow these guidelines:

- Be respectful and collaborative in all interactions with other team members.
- Follow the established coding standards and best practices for the project.
- Use the pull request process for all code contributions, and ensure that your code is properly reviewed before it is merged into the main codebase.
- Report any issues or bugs you encounter in the GitHub Issues, and provide as much detail as possible to help others understand and address the issue.
- Stay engaged with the project and communicate regularly with other team members to ensure that your contributions align with the project's goals and priorities.

5.0.6 Code of Conduct

To maintain a positive and inclusive environment for all contributors, we have established a code of conduct that all team members are expected to follow; See Figure 8 for details.

- **Respect and Kindness:** Treat others with respect and kindness. Disagreements are fine, but personal attacks, harassment, or any form of disrespectful behavior will not be tolerated.
- **English Only:** To maintain a cohesive and inclusive community, please keep all communications in English.
- **No NSFW/Extreme Content:** This is a robotics server focused on learning and collaboration. Any content or discussions deemed NSFW (Not Safe For Work) or extreme in nature are strictly prohibited.
- **Unsolicited DMs:** Respect the privacy of others. Do not send unsolicited direct messages to members without their consent. If you wish to reach out to someone, please do so in a respectful manner and only after obtaining permission in the server channels.

Figure 8: Code of Conduct

Active Development

There are three main areas of active development for the software team:

1. Primary Computer Development
2. Base Station Development
3. Web Client Application Development

Each area has its own set of tasks and responsibilities, but they all work together to create a cohesive software system for the Loon-E ASV.

WARNING

Ensure you have the [environment variables](#) set up correctly when developing. Check your `/.bashrc` file for the necessary environment variables and their values.

5.1.1 Primary Computer Development

This area focuses on the development of the software that runs on the ASV's primary computer, which is responsible for controlling the ASV and processing data from its sensors [10].

To develop you require section 5.10 which specifies the Loon-Env development environment, which is a Docker-based environment that provides all the necessary tools and dependencies for developing software for the Loon-E ASV.

Remote Connections

Local development is done on the ASV's primary computer, which is a Jetson Orin. Remote access to the primary computer is necessary for monitoring the ASV's operations and for development purposes.

In order to connect, the lovely folks at TailScale ⁵ have set up a secure VPN connection to the ASV's primary computer, allowing developers to access the system remotely from their own devices. This VPN connection ensures that developers can securely access the ASV's primary computer from anywhere, enabling them to monitor the ASV's operations, access logs, and perform development tasks without needing to be physically present at the ASV's location. At cost, local development on a small device is not scalable for larger teams,

⁵TailScale is a popular VPN solution that provides secure and easy-to-use remote access to devices.

fortunately, our software team is relatively small and the VPN connection provides a convenient solution for remote access to the ASV's primary computer.

5.2.1 TailScale Connection

To connect to the ASV's primary computer using TailScale, developers need to follow these steps:

1. [Install the TailScale client](#) on their local device (available for Windows, macOS, Linux, iOS, and Android).
2. [Create a Github account](#) (if they don't have one already)
3. Notify the software team lead of their Github username so that they can be added to our Github organization.
4. Sign in to TailScale using their Github credentials.⁶
5. Once signed in, they will see the ASV's primary computer listed as a device in their TailScale dashboard.
6. Click on the ASV's primary computer (named "ubuntu") to establish a secure VPN connection.
7. Once connected, developers can access the ASV's primary computer as if they were on the same local network, allowing them to monitor and develop the software remotely.

5.2.2 RustDesk Connection

In addition to the TailScale VPN connection, developers can also use RustDesk for remote desktop access to the ASV's primary computer. RustDesk is an open-source remote desktop software that allows users to access and control a computer remotely. To use RustDesk for remote desktop access, developers need to follow these steps:

1. [Install the RustDesk client](#) on their local device (available for Windows, macOS, Linux, iOS, and Android).
2. Obtain the RustDesk ID and password for the ASV's primary computer from the software team lead.
3. Open the RustDesk client and enter the ASV's primary computer's RustDesk ID and password to establish a remote desktop connection.

Running the Software

Refer to Section 5.2 for instructions on how to remotely connect to the ASV's primary computer; this is needed for running software on the ASV.

Once connected to the primary computer, a [custom script](#) has been created to simplify the process of running the software. To start the software, developers can run the following command in the terminal:

```
LoonE --start
```

⁶TailScale let us use their service so long as we are open source and connected to the Github organization. Developers will need to sign in with their Github account to access the VPN.

This command will build and execute a docker container from configurations installed from the [custom script's install features](#).

INFO

The LoonE command is installed with the `/install.bash` located in the repository, which is run as part of the setup process. This command is a custom script that simplifies the process of starting the software by automating the necessary steps to build and run the software in a Docker container.

WARNING

The LoonE command may also freeze the terminal and cause a temporary 10 minute loss of connection to the ASV, but this is normal as the software is starting up and may take some time to build. It is not recommended to stop the process of building the container.

7

WARNING

Changes in container will not be saved

You may need to enter the container in multiple terminals to run different processes. Follow the instructions below to enter the container:

```
docker ps # to get the container id or name
docker exec -it <container_id_or_name> /bin/bash
```

For our environment it is set to build ZedXWrapper from our [main repository](#) instead of stereolabs' repository. This is because Stereolabs' repository is actively maintained and may introduce breaking changes that can disrupt our development process. By building from our repository, we have more control over the software and can ensure that it remains stable and compatible with our system, allowing for a smoother development experience. Additionally, it makes it easier for us to set the configuration for the ZedX camera, which is crucial for our ASV's operations.

To run implemented features within the container, the current command is as follows:

```
ros2 launch loon_e_coms coms_launch.py
```

This command will launch the ROS2 nodes—including ZedX-Wrapper—for the Loon-E ASV's communication system, allowing the ASV to send and receive data as part of its operations. See the launch file for more details on what processes are launched and how they are configured.

INFO

You can learn more about launch files in ROS [here](#).

⁷A docker container either downloads the scripts or establishes a volume from the host which has the scripts.

Troubleshooting

NOTE

For most issues, you may benefit from reading Section 5.5 or 5.7 to ensure your environment is set up correctly.

If you encounter issues while running the software, here are some common troubleshooting steps:

5.4.1 Camera not connecting

If the ZedX camera is not connecting or functioning properly, try the following steps:

- Ensure that the ZedX camera is properly connected to the primary computer and powered on.
- Check the camera's physical connection and power status, and ensure that it is securely plugged in.
- Verify that the necessary drivers and software for the ZedX camera are installed and up to date

```
apt list --installed | grep zed
```

This should show the zedlink-duo and ros-humble-zed-msgs packages

- Check diagnostics

```
ZED_Diagnostic
```

This should show diagnostic messages from the ZedX camera, which can help identify any issues with the camera's operation.

WARNING

If in a container the diagnostic tool will not detect the driver, you will need to run it on the host machine

NOTE

If the camera is not connecting, it may be due to a hardware issue, driver issue, or configuration issue. Checking the physical connection, verifying software installation, and reviewing diagnostic messages can help identify and resolve the problem.

5.4.2 ROS2 nodes not communicating

If the ROS2 nodes are not communicating properly, try the following steps:

- Ensure that all ROS2 nodes are properly launched and running.
- Check the ROS2 topic list to verify that the expected topics are being published and subscribed to:

```
ros2 topic list
```

- Use ROS2 topic echo to check the data being published on specific topics:

```
ros2 topic echo <topic_name>
```

- Check for any error messages in the terminal where the nodes are running, which may indicate issues with node communication or configuration.
- Verify that the ROS2 middleware (Cyclone DDS) is properly configured and running, as it is responsible for facilitating communication between nodes.
- Ensure the topics are being run on the same Domain ID, as ROS2 uses DDS which requires all nodes to be on the same Domain ID to communicate.
- Check for any firewall or network issues that may be preventing communication between nodes, especially if running across multiple machines.
- Verify that the ROS2 environment variables are properly set, as incorrect environment configurations can lead to communication issues between nodes.
- If using Docker, ensure that the container has the necessary network configurations to allow communication between nodes, especially if nodes are running in different containers or on the host machine.

5.4.3 ROS2 topic list waiting indefinitely

Your ROS2 topic list may be waiting indefinitely due to a misconfiguration in the ROS2 environment variables, network issues, or problems with the ROS2 middleware (Cyclone DDS). Here are some steps to troubleshoot this issue:

- Check that the ROS2 environment variables are properly set, especially `ROS_DOMAIN_ID`, `ROS_LOCALHOST_ONLY`, and `RMW_IMPLEMENTATION`. Incorrect settings can lead to communication issues and cause the topic list to wait indefinitely. You can read about them in [Section 5.7](#).
- Verify that the ROS2 middleware (Cyclone DDS) is properly configured and running, as it is responsible for facilitating communication between nodes. Issues with the middleware can lead to communication problems and cause the topic list to hang.
- Check for any firewall or network issues that may be preventing communication between nodes, especially if running across multiple machines. Network misconfigurations can lead to communication failures and cause the topic list to wait indefinitely.
- Ensure that all ROS2 nodes are properly launched and running, as missing or non-functional nodes can lead to communication issues and cause the topic list to hang.

- If using Docker, ensure that the container has the necessary network configurations (see Section 5.5) to allow communication between nodes, especially if nodes are running in different containers or on the host machine. Docker network misconfigurations can lead to communication failures and cause the topic list to wait indefinitely.

5.4.4 RVIZ not displaying data

NOTE

RVIZ has been modified for stereocameras under Zed ROS 2 Wrapper, use the modified version of RVIZ for best results.

RVIZ is a visualization tool for ROS2 that allows users to visualize sensor data, robot models, and other information. If RVIZ is not displaying data properly, try the following steps:

- Ensure that RVIZ is properly installed and launched.
- Check that the correct ROS2 topics are being visualized in RVIZ, and that they are being published with the expected data.
- Verify that the RVIZ configuration is set up correctly, including the fixed frame and any necessary transforms.
- Check for any error messages in the terminal where RVIZ is running, which may indicate issues with data visualization or configuration.
- Ensure that the necessary RVIZ plugins are installed and configured to visualize the specific types of data being published by the nodes.

Other issues may arise such as:

- Nodes not launching properly
- Data not being published or subscribed to as expected
- Network communication issues between nodes
- Hardware issues with sensors or the primary computer
- ZedX Configuration issues (likely cause)

5.4.5 Simulation issues

Currently there are only one setup for our branch of the ROS2 wrapper for the ZedX camera, which is to build the wrapper from our repository and not to use in ROS2 Isaac SIM bridge. This is because we haven't done that yet.

Docker Use

Docker is a powerful tool for creating, deploying, and running applications in containers. It allows you to package your application with all of its dependencies into a standardized unit for software development [8]. This can be particularly useful for ROS 2 development, as it can help ensure that your development environment is consistent across different machines and operating systems.

WARNING

It is prerequisite to have an understanding of Linux systems before using Docker.

NOTE

This document assumes you have already set up your environment variables as described in the Section 5.8 and that you have installed Docker. If you have not done so, please refer to that documentation before proceeding.

5.5.1 Images

Docker images are the basis of Docker containers. They are read-only templates that contain the instructions for creating a Docker container. You can create your own Docker images or use pre-built images from Docker Hub. For ROS 2 development, you can use the official ROS 2 images provided by Open Robotics or, for NVIDIA Jetson devices, images provided by NVIDIA. These images come pre-configured with ROS 2 and the necessary dependencies, making it easier to get started with development.

We have used our own custom image based on the official ROS 2 image, which includes additional tools and libraries that we find useful for our development process. You can find our custom Dockerfile when we release our [Loon-Env](#) repository.

NOTE

For our NVIDIA Orin Nano, we are using nvcr.io/nvidia/isaac/ros:aarch64-ros2_humble_4c0c55ddddd2bbcc3e8d5f9753bee634c, which is based on the official ROS-2 Humble image and includes additional tools and libraries for Loon-E's development on NVIDIA Jetson devices.

5.5.2 Volumes

Docker volumes are a way to persist data generated by and used by Docker containers. They allow you to store data outside of the container's filesystem, which can be useful for sharing data between the host machine and the container or for persisting data across container restarts. When using Docker for ROS 2 development, you can use volumes to share your ROS 2 workspace between the host machine and the container. This allows you to edit your code on the host machine and have those changes reflected in the container without needing to rebuild the image.

Because Loon-E uses Zedx we have to make volumes to ensure the Zedx SDK and its dependencies are properly shared between the host machine and the container. This is necessary because the Zedx SDK requires access to certain hardware resources, such as the GPU, which may not be available within the

container. By using volumes, we can ensure that the necessary files and libraries are accessible to the container, allowing us to use the Zedx SDK for vision processing in our ROS 2 development. Following the example on [Stereolabs](#), we need to set the following volumes.

5.5.3 Hardware & Device Volumes

Volume Name	Mount Path	Purpose
/dev/	/dev/	This is the device file for the Zedx camera. It allows the container to access the camera hardware.
/tmp/	/tmp/	Temporary directory that the Zedx SDK uses for storing temporary files. It allows the container to access these files as needed.

Table 5: Docker Hardware Volumes for Zedx SDK

5.5.4 SDK Configuration Volumes

Volume Name	Mount Path	Purpose
/var/nvidia/nvcam/settings/	/var/nvidia/nvcam/settings/	Directory where the Zedx SDK stores its configuration files. It allows the container to access these files as needed.
/etc/systemd/system/zed_x_daemon.service	/etc/systemd/system/zed_x_daemon.service	Systemd service file for the Zedx daemon. It allows the container to manage the Zedx daemon as needed.
\$HOME/zed_docker.ai/	/usr/local/zed_docker.ai/	Host directory used for storing any additional files or data related to ROS 2 development with the Zedx SDK. It allows easy sharing between host and container.

Table 6: Docker SDK Configuration Volumes for Zedx SDK

5.5.5 Display & X11 Volumes

Volume Name	Mount Path	Purpose
\$HOME/.Xauthority	/root/.Xauthority	X authority file for the host machine. It allows the container to access the X server for running graphical applications.

Table 7: Docker Display Volumes for Zedx SDK

5.5.6 Options

When running a Docker container for ROS 2 development, there are several options that you may need to set to ensure that the container has the necessary permissions and access to resources. These options can include runtime settings, network settings, and GPU access.

Option Name	Purpose
-runtime nvidia	Allows the container to use the NVIDIA runtime, necessary for accessing GPU resources required by the Zedx SDK.
-it	Interactive terminal for running commands and debugging within the container.
-privileged	Gives the container additional privileges, which may be necessary for accessing hardware resources or managing system services.
--net=host	Uses the host machine's network stack, useful for communication between the container and other devices on the network.
--ipc=host	Uses the host machine's IPC namespace, necessary for applications that require shared memory or other IPC mechanisms.
--gpus all	Allows the container to access all available GPU resources on the host machine.
--pid=host	Uses the host machine's PID namespace, useful for applications that require access to the host's process information or for debugging.

Table 8: Docker Options for ROS 2 Development

5.5.7 Environment Variables

When running a Docker container for ROS 2 development, you may need to set certain environment variables to ensure that the container has the necessary configuration and access to resources.

Environment Variable	Purpose
DISPLAY	Allows the container to access the host machine's display, useful for running graphical applications or visualizing data from the Zedx camera.
XAUTHORITY	Allows the container to access the host machine's X authority file, necessary for running graphical applications that require access to the X server.
ROS_DOMAIN_ID	Sets the ROS domain ID for the container, necessary for ensuring that the container can communicate with other ROS nodes on the same network.
ROS_LOCALHOST_ONLY	Limits ROS communication to localhost only; useful to prevent interference with other ROS systems on the network.
RMW_IMPLEMENTATION	Specifies which ROS middleware implementation to use within the container, ensuring compatibility with ROS nodes and libraries in use.

Table 9: Environment Variables for Docker ROS 2 Development

Example

Here is an example of how to run a Docker container for ROS 2 development with the necessary volumes, options, and environment variables:

```
docker run --runtime nvidia -it --privileged --net=host --ipc=host --gpus all --pid=host \
```

```

-v /dev/:/dev/ \
-v /tmp/:/tmp/ \
-v /var/nvidia/nvcam/settings/:/var/nvidia/nvcam/settings/ \
-v ${HOME}/zed_docker_ai/:/usr/local/zed_docker_ai/ \
-v ${HOME}/.Xauthority:/root/.Xauthority \
-e DISPLAY=$DISPLAY \
-e XAUTHORITY=$XAUTHORITY \
-e ROS_DOMAIN_ID=$ROS_DOMAIN_ID \
-e ROS_LOCALHOST_ONLY=$ROS_LOCALHOST_ONLY \
-e RMW_IMPLEMENTATION=$RMW_IMPLEMENTATION \
--name loon-e-dev-container \
loon-e-dev-image:latest

```

i NOTE

ROS_DOMAIN_ID, ROS_LOCALHOST_ONLY, and RMW_IMPLEMENTATION should be set in your host environment before running the container; they will be passed into the container as environment variables. This ensures that the ROS 2 configuration within the container matches that of the host environment.

Colcon Setup

5.7.1 Background

colcon is an iteration on the ROS build tools `catkin.make`, `catkin.make.isolated`, `catkin.tools` and `ament.tools`. For more information on the design of colcon see the [design document](#).

The source code can be found in the [colcon GitHub organization](#).

5.7.2 Requirements

Ensure you already installed ROS 2. If you have not installed ROS 2 follow the [installation instructions](#).

5.7.3 Installation Linux

You can install colcon through the `apt` package manager with the command:

```
sudo apt install python3-colcon-common-extensions
```

5.7.4 Installation macOS

You can install colcon with Python's `pip`:

```
python3 -m pip install colcon-common-extensions
```

5.7.5 Installation Windows

You can install colcon with Python's `pip` on Windows:

```
pip install -U colcon-common-extensions
```

Environment Variables Setup

When developing with ROS 2, it is important to set up your environment variables correctly to ensure that ROS 2 operates as expected. This includes sourcing the ROS 2 setup files and setting any necessary environment variables for ROS 2 communication and configuration.

For all operating systems, you will need to set up some environment variables to ensure ROS 2 operates correctly. This includes sourcing the ROS 2 setup files and setting any necessary ROS 2 environment variables.

First, source the setup files for your OS, then set the environment variables described below.

5.8.1 Domain ID

See the [domain ID](#) article for details on ROS domain IDs.

5.8.2 Localhost Only

By default, ROS 2 communication is not limited to localhost. The environment variable `ROS_LOCALHOST_ONLY` allows you to limit ROS 2 communication to localhost only. This means your ROS 2 system, and its topics, services, and actions will not be visible to other computers on the local network.

5.8.3 RMW Implementation

ROS 2 supports multiple RMW implementations, which are the underlying middleware that handles communication. The default RMW implementation is `rmw_fastrtps_cpp`. Setting `RMW_IMPLEMENTATION` allows you to choose which implementation ROS 2 should use.

Example

```
ROS_DOMAIN_ID=0 # This is also the default
ROS_LOCALHOST_ONLY=1 # This is also the default
RMW_IMPLEMENTATION=rmw_fastrtps_cpp # This is also the default
```

WARNING

The exact commands depend on your operating system and shell. If you're having problems, ensure the file path leads to your installation and that you're using the correct syntax for your shell.

INFO

These variables must match if run in a container. If you set `ROS_LOCALHOST_ONLY=1` in your host environment, you must also set it in your container environment. If you set `ROS_DOMAIN_ID=0` in your host environment, you must also set it in your container environment. There is additional information on container use in the [Docker documentation](#).

5.9.1 Linux

Begin by sourcing the ROS 2 setup file and setting the necessary environment variables:

```
source /opt/ros/humble/setup.bash
export ROS_DOMAIN_ID=0
export ROS_LOCALHOST_ONLY=1
export RMW_IMPLEMENTATION=rmw_fastrtps_cpp
```

NOTE

To set environment variables persistently, add them to your shell startup script:

```
echo "export ROS_DOMAIN_ID=0 ROS_LOCALHOST_ONLY=1 RMW_IMPLEMENTATION=rmw_fastrtps_cpp" >> ~/.bashrc
```

5.9.2 Windows

To source the ROS 2 local setup on Windows PowerShell:

```
call C:\dev\ros2\local_setup.bat
```

If you don't want to source the setup file every time you open a new shell, create a folder in *My Documents* called *WindowsPowerShell* and create a file named `Microsoft.PowerShell_profile.ps1` containing the path to your setup script. You may need to run 'Unblock-File' on the script to avoid repeated permission prompts.

WARNING

The exact command depends on where you installed ROS 2. If you're having problems, ensure the file path leads to your installation.

5.9.3 Check Environment Variables

Sourcing ROS 2 setup files will set several environment variables necessary for operating ROS 2. If you ever have problems finding or using your ROS 2 packages, make sure that your environment is properly set up using the following commands.

macOS and Linux

```
printenv | grep -i ROS
```

Windows

```
set | findstr -i ROS
```

Check that variables like `ROS_DISTRO` and `ROS_VERSION` are set. Example values:

```
ROS_VERSION=2
ROS_PYTHON_VERSION=3
ROS_DISTRO=humble
```

If the environment variables are not set correctly, return to the ROS 2 package installation section of the installation guide you followed. If you need more specific help, you can get answers from the community.

5.9.4 Troubleshooting

Check the [DDS settings](#) if you are having trouble with ROS 2 communication. You may need to set additional environment variables depending on your DDS implementation and network configuration.

Loon Env

‘LoonE’ is the operator-facing command installed by Loon-Env for launching and interacting with the Docker-based Loon-E environment [10].

The concepts in setup following Section 5.5 and Section 5.8 are abstracted behind ‘LoonE’ to provide a more user-friendly interface for launching the development environment.

To use Loon Env, you can run the following command in your terminal:

```
LoonE -h
```

5.10.1 What It Does

WARNING

Loon Env is a wrapper around Docker and Docker Compose, so it requires Docker to be installed and properly configured on your system. Ensure that you have Docker installed and that you can run Docker commands from your terminal before using Loon Env.

- Wraps Docker and Docker Compose operations behind a short command.
- Launches the ‘zed’ and ‘loone’ services defined in the installed ‘compose.yaml’.
- Prepares X11 access with ‘xhost’ and ‘xauth’ when GUI forwarding is needed.
- Uses environment variables from ‘/.loon-e-env’ to decide image names and runtime defaults.

The commands are not available while inside the container it builds therefore use the ‘exit’ command to return to your host terminal.

Any changes you make will not be reflected on the host machine as LoonE build from the *main* branch of the Loon-E repository, so you will need to commit and push your changes to the repository to see them reflected in the LoonE environment.

5.10.2 Building with LoonE

The command

```
LoonE -b
```

will build the Docker images defined in the ‘compose.yaml’ file. This includes building the Zedx wrapper and the Loon-E development image. The build process may take some time, especially for the Zedx wrapper, as it includes many dependencies and configurations. To build the portion without rebuilding the zed wrapper—which takes a long time—you can use the ‘-loone’ option with the ‘LoonE -b’ command to build only the latest from the repository.

```
LoonE -b --loone
```

5.10.3 Building with simulator with LoonE

The build command also takes an argument ‘`--virtual`’ which will build with configs for the simulator instead of the real hardware. This is useful for developers who do not have access to the real hardware or want to test their code in a simulated environment.

```
LoonE -b --zedx --virtual
```

5.10.4 Running with LoonE

To run the Loon-E development environment, you can use the following command:

```
LoonE --start
```

This will start the Docker containers for the Zedx wrapper and the Loon-E development environment. You can then access the development environment through the terminal or by using a remote desktop application if GUI forwarding is set up.

5.10.5 Stopping with LoonE

To stop the Loon-E development environment, you can use the following command:

```
LoonE --stop
```

depending on the presence of ‘zed’ or ‘loone’ in the arguments, this will stop the corresponding containers. You can also use ‘LoonE `--stop`’ to stop all containers related to Loon-E.

5.10.6 Cleaning with LoonE

To clean up the Docker environment, you need to use composer commands to remove the containers, images, and volumes created by LoonE. You can use the following command to clean up the environment:

```
docker compose -f "$ASSET_DIR/compose.yaml" down --rmi all -v
```

The `ASSET_DIR` environment variable is set by Loon-Env to point to the directory where the ‘`compose.yaml`’ file is located. This command will stop and remove all containers, remove all images, and remove all volumes associated with the Loon-E development environment.

NOTE

This is useful if you need to rebuild and it’s still using cache

5.10.7 Development in containers

When you run the Loon-E development environment, you will be inside a Docker container that has ROS 2 and the necessary dependencies installed. You can use this environment to develop your ROS 2 packages, test your code, and run simulations.

It’s likely you’ll want to enter the ‘loone’ container to develop Loon-E specific code. You can do this with the following command:

```
docker exec -it loone bash
```

or determine the container ID with ‘docker ps’ and use that ID in place of ‘loone’ in the command above. This will give you access to the terminal inside the container, where you can navigate to your ROS 2 workspace, build your packages with ‘colcon’, and run your ROS 2 nodes.

WARNING

Remember that any changes you make inside the container will not be reflected on the host machine unless you commit those changes to the repository and rebuild the image. Make sure to push your changes to the repository to see them reflected in the Loon-E environment.

NOTE

Inside the container you can specify what packages to build with `colcon build --packages-select package_name` to speed up the build process.

A Glossary

Autonomous Surface Vehicle (ASV) An autonomous surface vehicle (ASV) is an unmanned vessel that operates on the sea surface without real-time input or control from human operators.[30]

Base Station A fixed radio communications station that can communicate with mobile radio devices in its neighbourhood. Forms of radio communication that have base stations include radio wireless data and mobile telephony...[7] Information on the base station used in the Loon-E ASV system can be found in the base station section of this document (Section 3.2).

Data Flow Diagram (DFD) A data flow diagram (DFD) is a graphical representation of the flow of data through an information system.

DDS Short for Data Distribution Service a middleware for real-time communication and security.[28]

GPS Global Positioning System; "a navigational system using satellite signals to fix the location of a radio receiver on or above the earth's surface." [13]

HumberASV Humber Polytechnic's Mechatronics club. A multidisciplinary team of passionate Humber Polytechnic students and professionals dedicated to advancing autonomous maritime technology.[11]

Hyperlink hyperlink, a link between related pieces of information by electronic connections in order to allow a user easy access between them.[2]

LaTeX LaTeX, software used for typesetting technical documents.[3]

LIDAR LiDAR, an acronym for "light detection and ranging," is a remote-sensing technology that uses laser beams to measure precise distances and movement in an environment, in real time.[12]

Loon-E Humber ASV's current ASV.[11]

MQTT Message Queuing Telemetry Transport (MQTT) is a lightweight, publish-subscribe network protocol that transports messages between devices.[14]

Node A node is a process that performs computation [18].

Robot Operating System (ROS) The Robot Operating System (ROS) is a set of software libraries and tools that help you build robot applications.[19]

Pose In the fields of computing and computer vision, pose (or spatial pose) represents the position and the orientation of an object, each usually in three dimensions. [9]

PWM Acronym for Pulse Width Modulation.[4]

ROS2 The Robot Operating System (ROS) is a set of software libraries and tools that help you build robot applications. From drivers to state-of-the-art algorithms, and with powerful developer tools, ROS has what you need for your next robotics project. And it's all open source [21].

RTP Real-time Transport Protocol.

TCP Acronym for Transmission Control Protocol. TCP/IP, standard Internet communications protocols that allow digital computers to communicate over long distances. The Internet is a packet-switched network, in which information is broken down into small packets, sent individually over many different routes at the same time, and then reassembled at the receiving end. TCP is the component that collects and reassembles the packets of data, while IP is responsible for making sure the packets are sent to the right destination.[5]

TWIST Steering commands for a robot, consisting of linear and angular velocities.

Topic Topics are named buses over which nodes exchange messages [\[22\]](#).

Web Client See Web Browser.

Web Browser Software that allows a computer user to find and view information on the Internet [\[1\]](#).

Web Server server, network computer, computer program, or device that processes requests from a client [\[6\]](#).

B Bibliography

- [1] Britannica Editors. *Browser*. 2026. URL: <https://www.britannica.com/technology/browser> (visited on 05/13/2026).
- [2] Britannica Editors. *Hyperlink*. 2026. URL: <https://www.britannica.com/technology/hypertext> (visited on 05/13/2026).
- [3] Britannica Editors. *LaTeX*. 2026. URL: <https://www.britannica.com/technology/LaTeX-computer-programming-language> (visited on 05/13/2026).
- [4] Britannica Editors. *PWM*. 2026. URL: <https://www.britannica.com/technology/pulse-duration-modulation> (visited on 05/13/2026).
- [5] Britannica Editors. *TCP/IP*. 2026. URL: <https://www.britannica.com/technology/TCP-IP> (visited on 05/13/2026).
- [6] Britannica Editors. *Web Server*. 2026. URL: <https://www.britannica.com/technology/server> (visited on 05/13/2026).
- [7] Andrew Butterfield and John Szymanski. *base station*. 2018. DOI: 10.1093/acref/9780198725725.013.0348. URL: <https://www.oxfordreference.com/view/10.1093/acref/9780198725725.001.0001/acref-9780198725725-e-348>.
- [8] Docker. *What is Docker?* 2026. URL: <https://docs.docker.com/get-started/docker-overview/> (visited on 05/13/2026).
- [9] William A. Hoff, Khoi Nguyen, and Torsten Lyon. “computer-vision-based registration techniques for augmented reality”. In: *SPIE Proceedings* 2904 (Oct. 1996), pp. 538–548. DOI: 10.1117/12.256311.
- [10] Carson Fujita Humber ASV. *Loon Env*. 2026. URL: <https://github.com/HumberASV/Loon-Env> (visited on 05/14/2026).
- [11] HumberASV. *Our Team*. 2026. URL: <https://humberasv.ca/team> (visited on 03/17/2026).
- [12] IBM. *What is LIDAR?* 2026. URL: <https://www.ibm.com/think/topics/lidar> (visited on 03/17/2026).
- [13] Merriam-Webster. *GPS*. 2026. URL: <https://www.merriam-webster.com/dictionary/GPS> (visited on 05/13/2026).
- [14] MQTT.org. *MQTT*. 2026. URL: <https://mqtt.org/> (visited on 05/13/2026).
- [15] Njord. *Providing of GUI*. 2026. URL: <https://njord.gitbook.io/2026/11-evaluation/11.4-providing-of-gui> (visited on 05/13/2026).
- [16] RoboNation. *RoboBoat*. 2026. URL: <https://www.roboboat.org/> (visited on 04/16/2026).
- [17] Open Robotics. *DDS implementations*. 2026. URL: <https://docs.ros.org/en/humble/Installation/RMW-Implementations/DDS-Implementations.html> (visited on 04/16/2026).
- [18] Open Robotics. *Nodes*. 2026. URL: <https://wiki.ros.org/Nodes> (visited on 05/13/2026).
- [19] Open Robotics. *ROS*. 2026. URL: <https://www.ros.org/> (visited on 03/17/2026).
- [20] Open Robotics. *ROS Wiki*. 2026. URL: <https://wiki.ros.org/> (visited on 05/13/2026).
- [21] Open Robotics. *ROS2 Documentation: Humble*. 2026. URL: <https://docs.ros.org/en/humble/index.html> (visited on 04/16/2026).
- [22] Open Robotics. *Topics*. 2026. URL: <https://wiki.ros.org/Topics> (visited on 05/13/2026).
- [23] Amelia Soon et al. *RoboBoat 2026 Technical Design Report – Humber ASV Loon-E*. Toronto, ON, Canada, 2026. URL: <https://humberasv.ca/docs> (visited on 04/16/2026).

- [24] STEREO LABS. *Custom Object Detection and Tracking with ROS 2*. 2026. URL: <https://www.stereolabs.com/docs/ros2/custom-object-detection> (visited on 04/16/2026).
- [25] STEREO LABS. *DDS Middleware and Network tuning*. 2026. URL: <https://www.stereolabs.com/docs/ros2/dds-and-network-tuning/> (visited on 04/16/2026).
- [26] STEREO LABS. *Using ZED with ROS 2 and Isaac Sim*. 2026. URL: https://www.stereolabs.com/docs/isaac-sim/ros2_integration (visited on 04/16/2026).
- [27] STEREO LABS. *Zed SDK Documentation*. 2026. URL: <https://www.stereolabs.com/docs/> (visited on 04/16/2026).
- [28] Inc The MathWorks. *Introduction to Robot Operating System 2 (ROS 2)*. 2026. URL: <https://www.mathworks.com/help/ros/gs/robot-operating-system-ros2-basic-concepts.html> (visited on 05/13/2026).
- [29] TheFujirose. *Is the ros2 wrapper and streaming mutually exclusive and/or working?* 2026. URL: <https://community.stereolabs.com/t/is-the-ros2-wrapper-and-streaming-mutually-exclusive-and-or-working/11314> (visited on 05/14/2026).
- [30] Arthur Trembanis, Mark Lundine, and Kaitlyn McPherran. “Coastal Mapping and Monitoring”. In: *Encyclopedia of Geology (Second Edition)*. Ed. by David Alderton and Scott A. Elias. Second Edition. Oxford: Academic Press, 2021, pp. 251–266. ISBN: 978-0-08-102909-1. DOI: <https://doi.org/10.1016/B978-0-12-409548-9.12466-2>. URL: <https://www.sciencedirect.com/science/article/pii/B9780124095489124662>.