


Description

Harness for the head to the toolboard

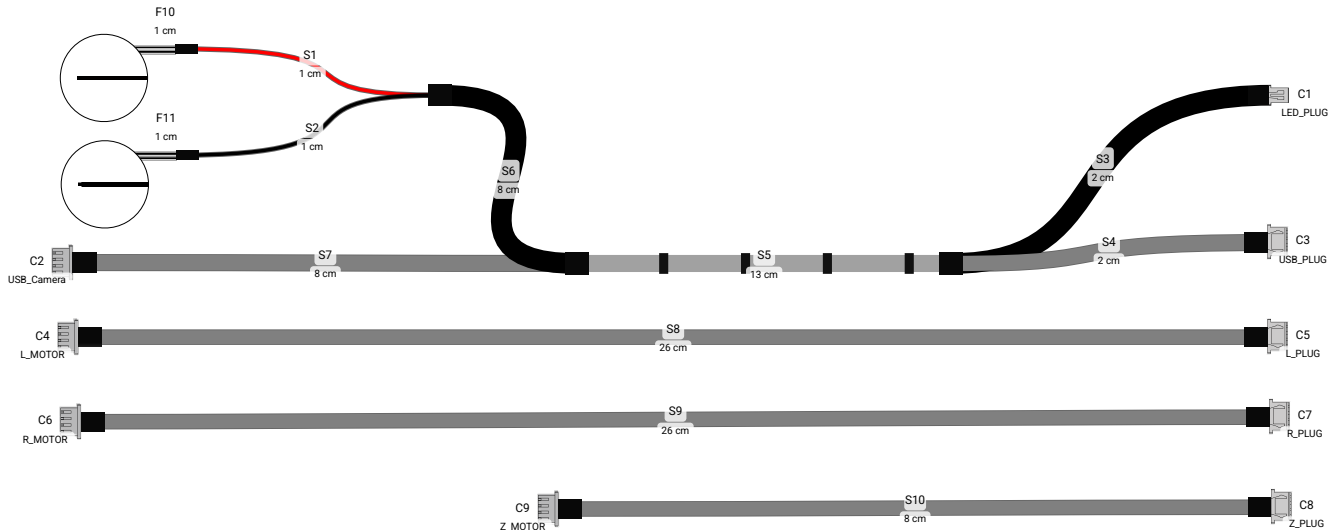

All the lengths are measured from the BACK OF THE BACKSHELL

Connectors

Letter	Name	Manufacturer PN	Custom Name	Number of Pins	Gender
C1	2 Pin XH F Shell (JST)	XHP-2	LED_PLUG	2	Female
C3	4 Pin XH F Shell (JST)	XHP-4	USB_PLUG	4	Female
C2	4 Pin XH F Shell (JST)	XHP-4	USB_Camera	4	Female
C4	4 Pin XH F Shell (JST)	XHP-4	L_MOTOR	4	Female
C5	4 Pin XH F Shell (JST)	XHP-4	L_PLUG	4	Female
C6	4 Pin XH F Shell (JST)	XHP-4	R_MOTOR	4	Female
C7	4 Pin XH F Shell (JST)	XHP-4	R_PLUG	4	Female
C8	4 Pin XH F Shell (JST)	XHP-4	Z_PLUG	4	Female
C9	4 Pin XH F Shell (JST)	XHP-4	Z_MOTOR	4	Female

Pins

Letter	Name	Manufacturer PN	Gender
C1	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C3	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C2	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C4	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C5	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C6	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C7	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C8	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female
C9	XH F Crimp Pin 22-28AWG (JST)	SXH-001T-P0.6	Female

Wires

Path	Connectors	Name	Manufacturer PN	Length	Path Screening	Path Slewing	Quantity
1	F10-C1	22AWG 7/0.25mm Red PTFE UL1213 (AlphaWire)	5855/7-RD005 / 5855/7-RD001	25 cm	None	None	1
2	F11-C1	22AWG 7/0.25 Black PTFE UL1213 (AlphaWire)	5855/7-BK005 / 5855/7-BK001	25 cm	None	None	1
4	C2-C3	RSVP		23 cm	None	None	1
6	C4-C5	Supertronic PVC		26 cm	None	None	1
7	C6-C7	Supertronic PVC		26 cm	None	None	1
8	C9-C8	Supertronic PVC		8 cm	None	None	1

Multicore Screening

Path	Wire Name	Wire Index	Type	Screening	Screening
4	RSVP	1	Screened (Braided)	C2 to pins (4)	C3 to pins (4)

Flying Lead Locations


Letter	Flying lead length	Ends	Labeling
F10	1 cm	tinned	none
F11	1 cm	tinned	none

Segments

Marking	Connectors	Length	Labeling	Bundle Screening	Bundle Sleeve
S1	F10	1 cm		-	-
S2	F11	1 cm		-	-
S3	C1	2 cm		-	Heatshrink
S4	C3	2 cm		-	-
S5		13 cm		-	Cable Ties
S6		8 cm		-	Heatshrink
S7	C2	8 cm		-	-
S8	C5, C4	26 cm		-	-
S9	C7, C6	26 cm		-	-
S10	C8, C9	8 cm		-	-

All the lengths are measured from the BACK OF THE BACKSHELL

Pinout Scheme

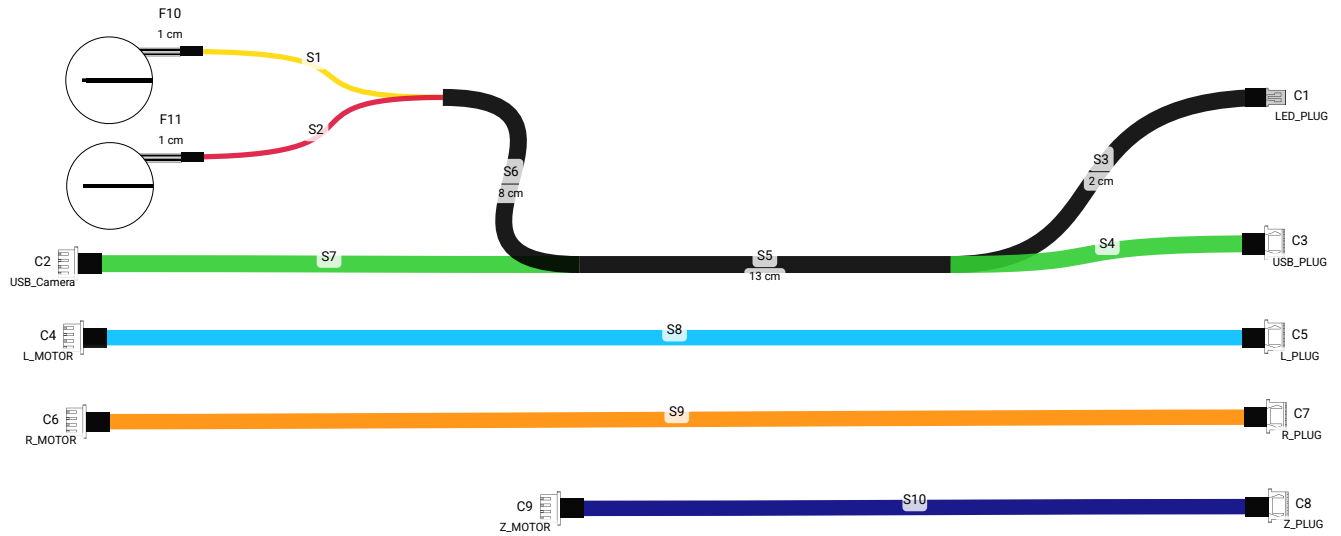

Pinout Tables

F10-C1 (Path 1) 22AWG 7/0.25mm Red PTFE UL1213 (AlphaWire)			F11-C1 (Path 2) 22AWG 7/0.25 Black PTFE UL1213 (AlphaWire)		
Signal name	F10 Pin - C1 Pin	Signal name	Signal name	F11 Pin - C1 Pin	Signal name
	tinned 1 - 1			tinned 1 - 2	

C2-C3 (Path 4) RSVP			C4-C5 (Path 6) Supertronic PVC		
#1 __ screening C2: to pins (4) __ screening C3: to pins (4)			#1		
	1-1	5V		1-1	A+
	4-4	GND		2-2	A-
	2-2	D-		3-3	B+
	3-3	D+		4-4	B-

C6-C7 (Path 7) Supertronic PVC			C9-C8 (Path 8) Supertronic PVC		
#1			#1		
	1-1	A+		1-1	A+
	2-2	A-		2-2	A-
	3-3	B+		3-3	B+
	4-4	B-		4-4	B-

Based on the attached customer specific cable assembly documentation we confirm the design correctness, freeze of the design, and approve the production of the cable assembly

Responsible technician:

Reviewed and approved by:

_____ . date _____