
GP38-2

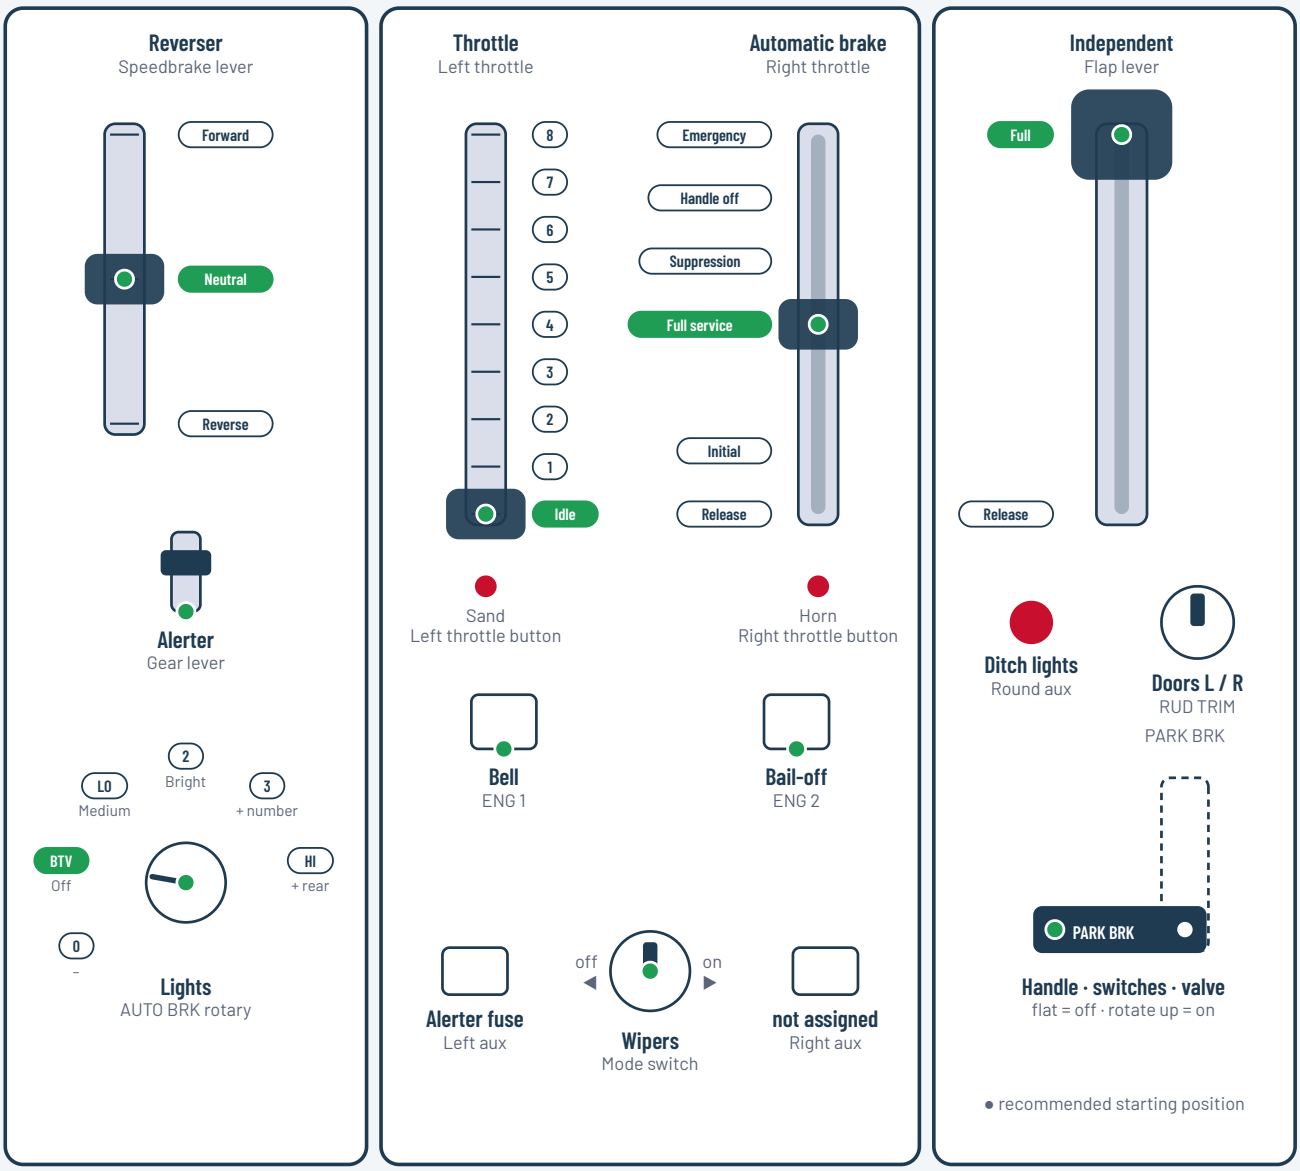

Cab setup

- PARK BRK up: reverser handle in, generator field / engine run / control switches on, brake valve cut in to Freight (the loco loads with them off)
- Reverser from Neutral to Forward; alerter fuse on (left aux lit)
- Lights to Bright, ditch lights on (round aux)
- Independent at Full, automatic brake at Full service (parked); throttle Idle

Cleared to depart

- Check the signal; bell on (ENG 1)
- Automatic brake to Release; independent to Release, ENG 2 up to bail off
- Throttle notch by notch
- Reset the alerter with the gear lever
- Brake: throttle to Idle, automatic brake into the service zone, independent for the final stop; Emergency at the far end



© TheJAG