


DB BR 145



From <https://steamcommunity.com/sharedfiles/filedetails/?id=1948213106>

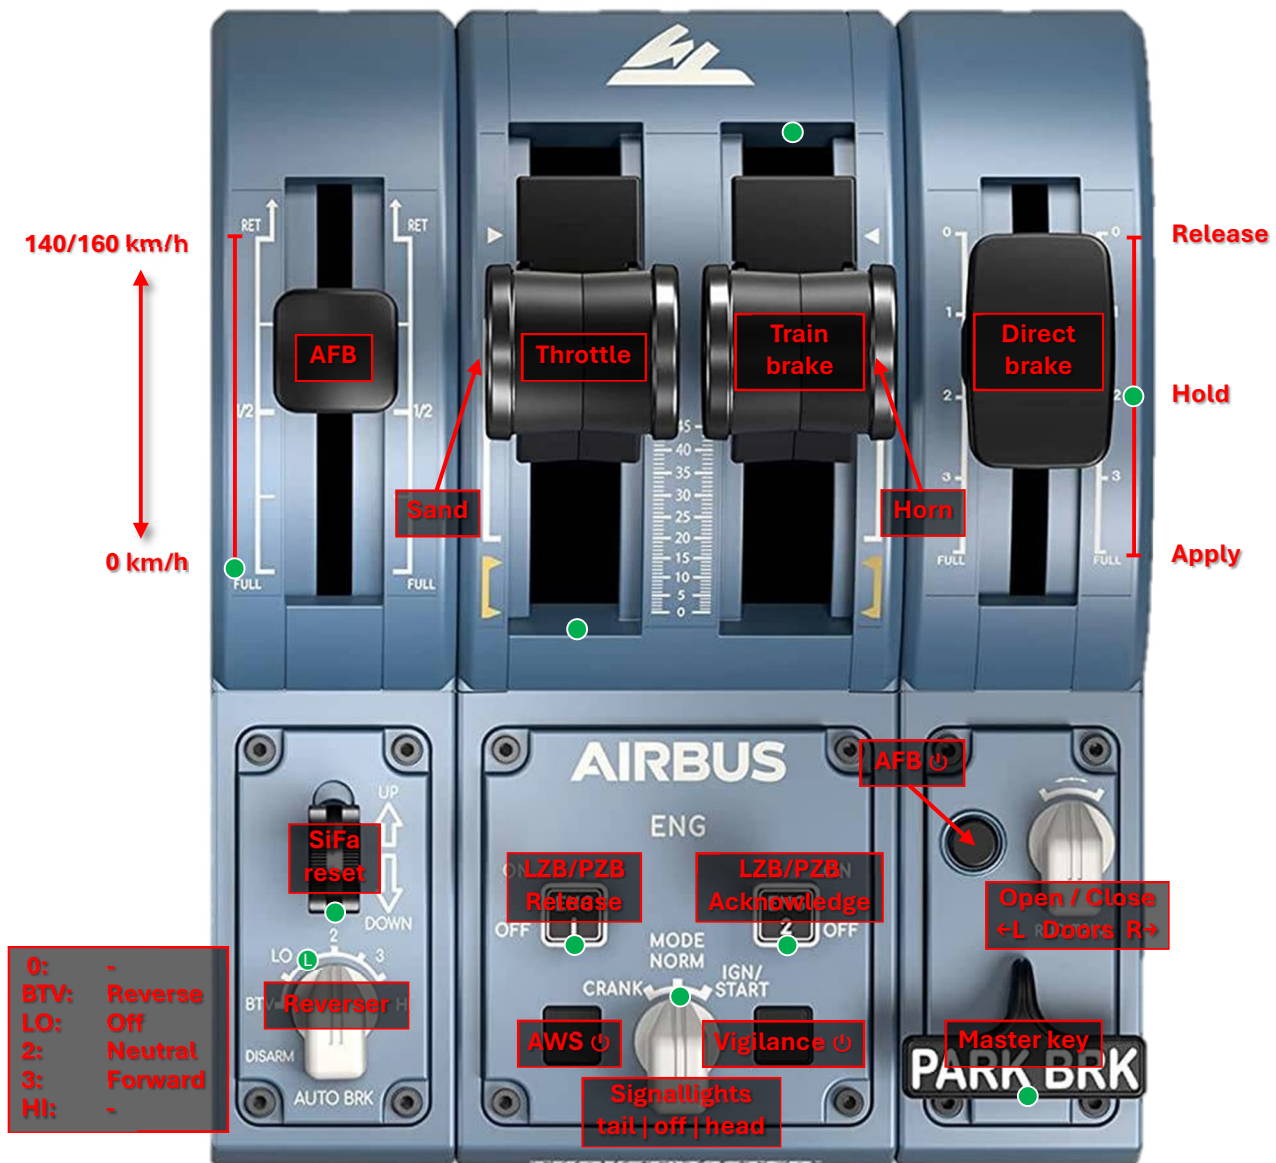

● Recommended initial position of lever / knob

Cab setup

- Insert master key
- Set reverser to neutral
- Open doors
- Turn on safety system (AWS)
- Turn on vigilance system
- Set headlights and taillights

Cleared to depart

- Check signal
- Set reverser to forward
- Release brakes
- Apply power

Cold and dark

- Ensure the locomotive is under overhead wires.
- Ensure at least one brake is applied. This is indicated by a red square with a black dot.
- Enter the locomotive through Cab 1 and enable the battery.
- Ensure that all circuit breakers on this backwall are closed.
- Check the normal position of all of the switches on the backwall.
- Set headlights as required.
- Set brake mode as required (R for passengers/light, P/G for freight depending on weight).
- Check that the Auxiliary Controls are off (side of cab for shunting / auxiliary operation).
- Insert the reverser and set it to V (Forward).
- Set Signal & Instrument Lights to on.
- Ensure AFB is off.
- Release the brakes until C-pressure is at 0.5 bar or lower.
- Ensure the Parking Brake is on (light illuminated).
- In the engine room, ensure every circuit breaker is closed.
- Ensure PZB, LZB and Sifa are in their normal position.
- Open the Sifa Cut-Off Valve.
- Ensure the Pantograph Cut-Off Valve is open.
- Ensure the Driver's Brake Cut-Off Valve is closed.
- Walk to Cab 2 and check that all circuit breakers are closed.
- Check the normal position of all of the switches on the backwall.
- Set headlights as required.
- Ensure the Direct Brake is set to the "Hold" position.
- Test the Horn Pedal.
- Ensure that the Air Compressor Switch is on.
- Set Signal & Instrument Lights to on.
- Return to Cab 1.
- Raise the Pantograph and close the Main Circuit Breaker.
- Enable the Air Compressor

