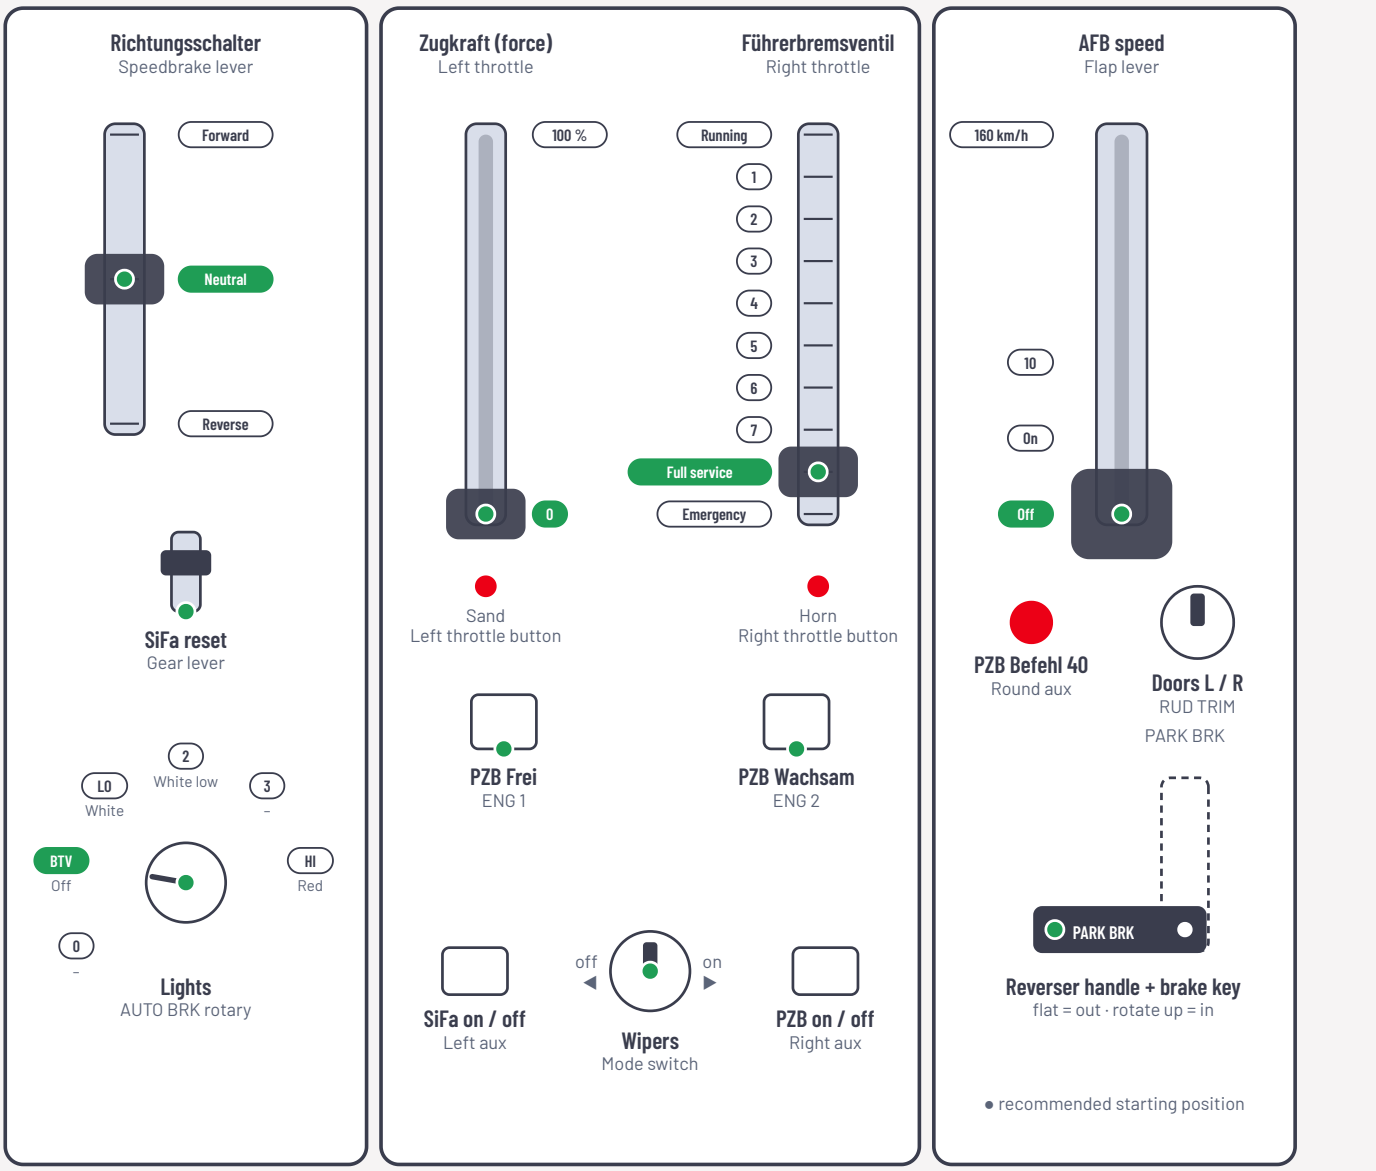
# BR 114





## Cab setup

- Reverser handle and brake key in (PARK BRK), battery on
- Richtungsschalter to Neutral
- Raise the pantograph and close the Hauptschalter in the cab
- SiFa and PZB on (aux squares), PZB mode set
- Lights to White
- AFB on (flap lever past Off), open doors (RUD TRIM)

## Cleared to depart

- Close doors, check the signal and PZB
- Richtungsschalter to Forward
- Führerbremsventil to Running
- Set the AFB speed on the flap lever, push the force lever up: the loco holds the speed
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: Führerbremsventil in steps, force lever back to 0





 © TheJAG