
BR 147

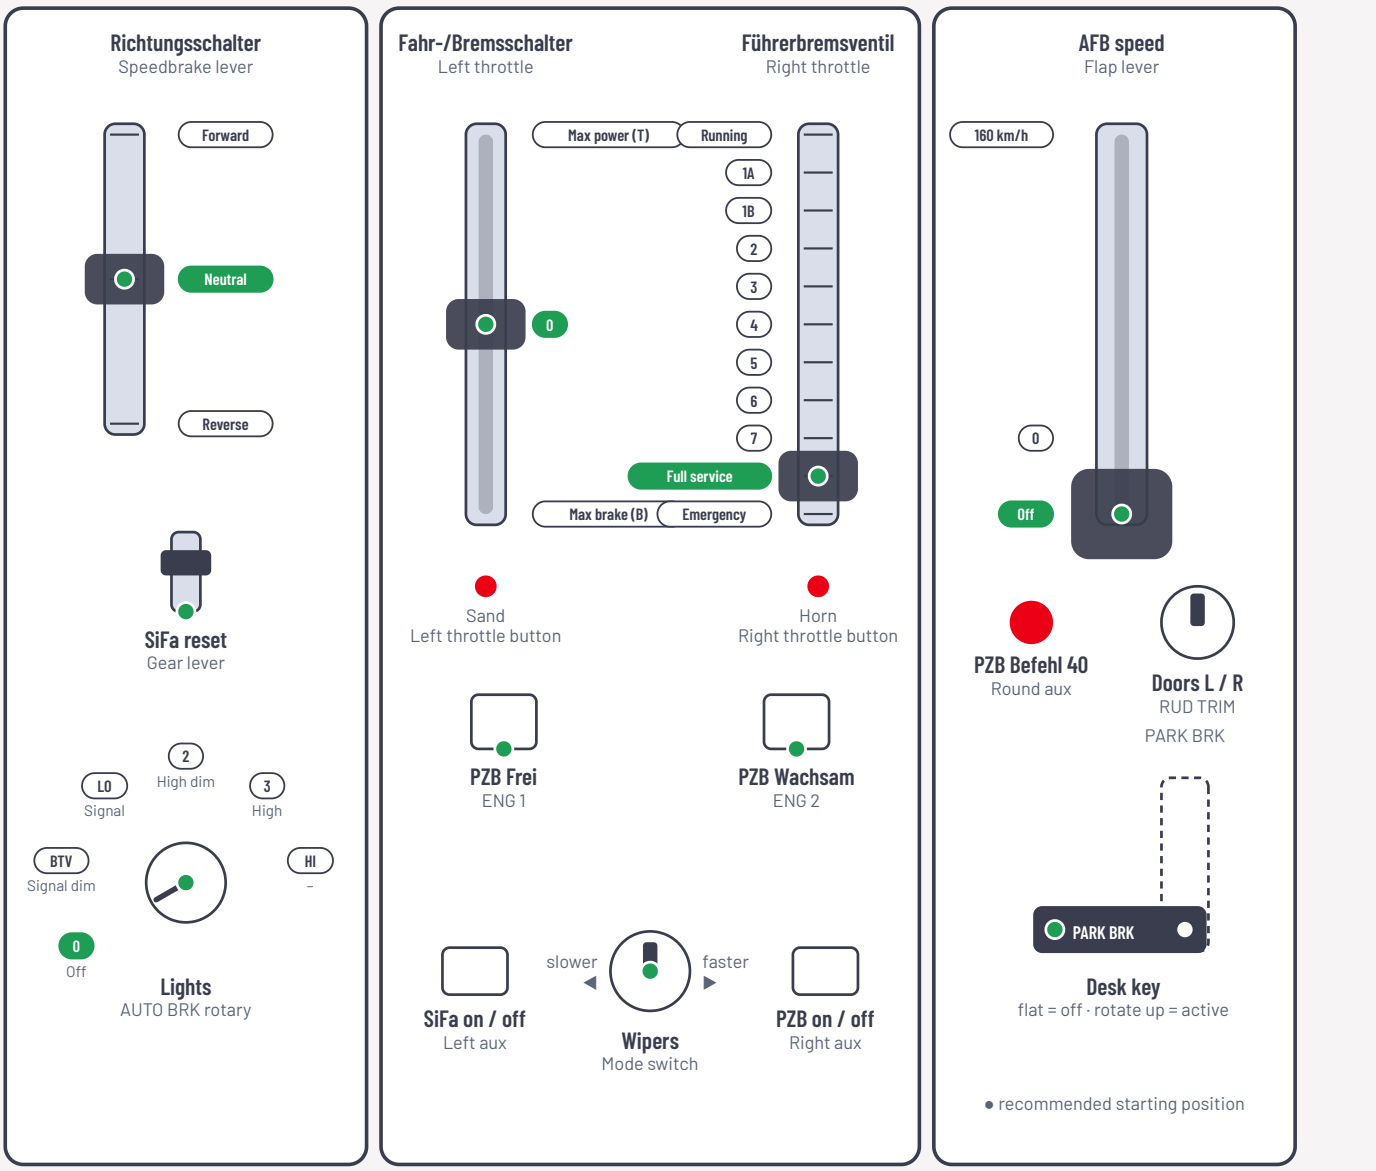


Cab setup

- Battery on in the cab, parking brake released
- PARK BRK up: desk active and Führerbremsventil cut in
- Raise the pantograph, close the Hauptschalter in the cab
- SiFa and PZB on (aux squares), PZB mode set
- Lights (AUTO BRK), open doors (RUD TRIM)
- AFB: flap lever off Off and set the speed, or leave it Off

Cleared to depart

- Close doors, check the signal and PZB
- Richtungsschalter to Forward
- Führerbremsventil to Running, wait for the brakes to release
- Fahr-/Bremsschalter towards T, or set the AFB speed on the flap lever
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: handle towards B (E-brake), Führerbremsventil in steps





Zeichnung: Bombardier Transportation / Deutsche Bahn AG, Einsatzmerkblatt BR 147 / 187 (05/2016)

store.steampowered.com/app/4680730 · Profile: TSW | BR 147 | DTG | © TheJAG

© TheJAG