
ES44AC

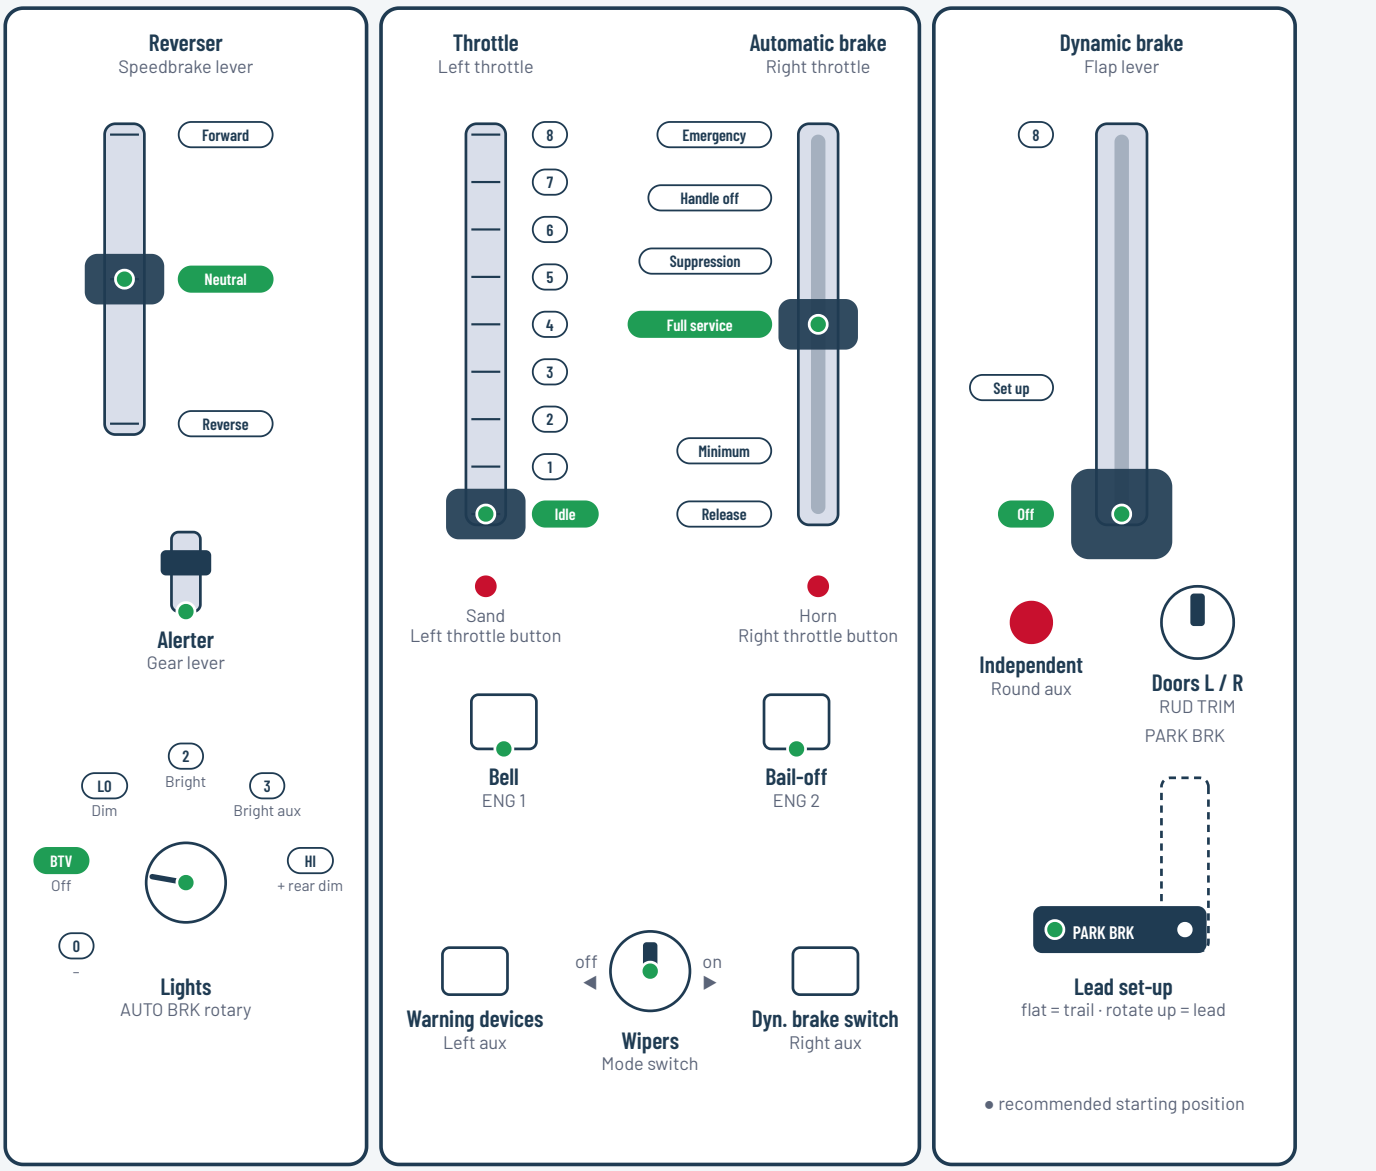

Cab setup

- PARK BRK up: brake cut-out and MU-2A valves to Lead, generator field on (the loco loads as a trailing unit with the field off)
- Reverser from Neutral to Forward; warning devices and dynamic brake switch on (aux squares lit)
- Lights to Bright
- Independent applied (round aux lit; it loads released), automatic brake at Full service (parked); throttle Idle, dynamic Off

Cleared to depart

- Check the signal; bell on (ENG 1)
- Automatic brake to Release; round aux out to release the independent, ENG 2 up to bail off
- Throttle notch by notch; keep the dynamic brake Off while powering
- Reset the alerter with the gear lever
- Brake: throttle to Idle, dynamic brake past Set up into the zone; automatic brake into the service zone for the stop, Emergency at the far end



© TheJAG