
BR 401 ICE 1

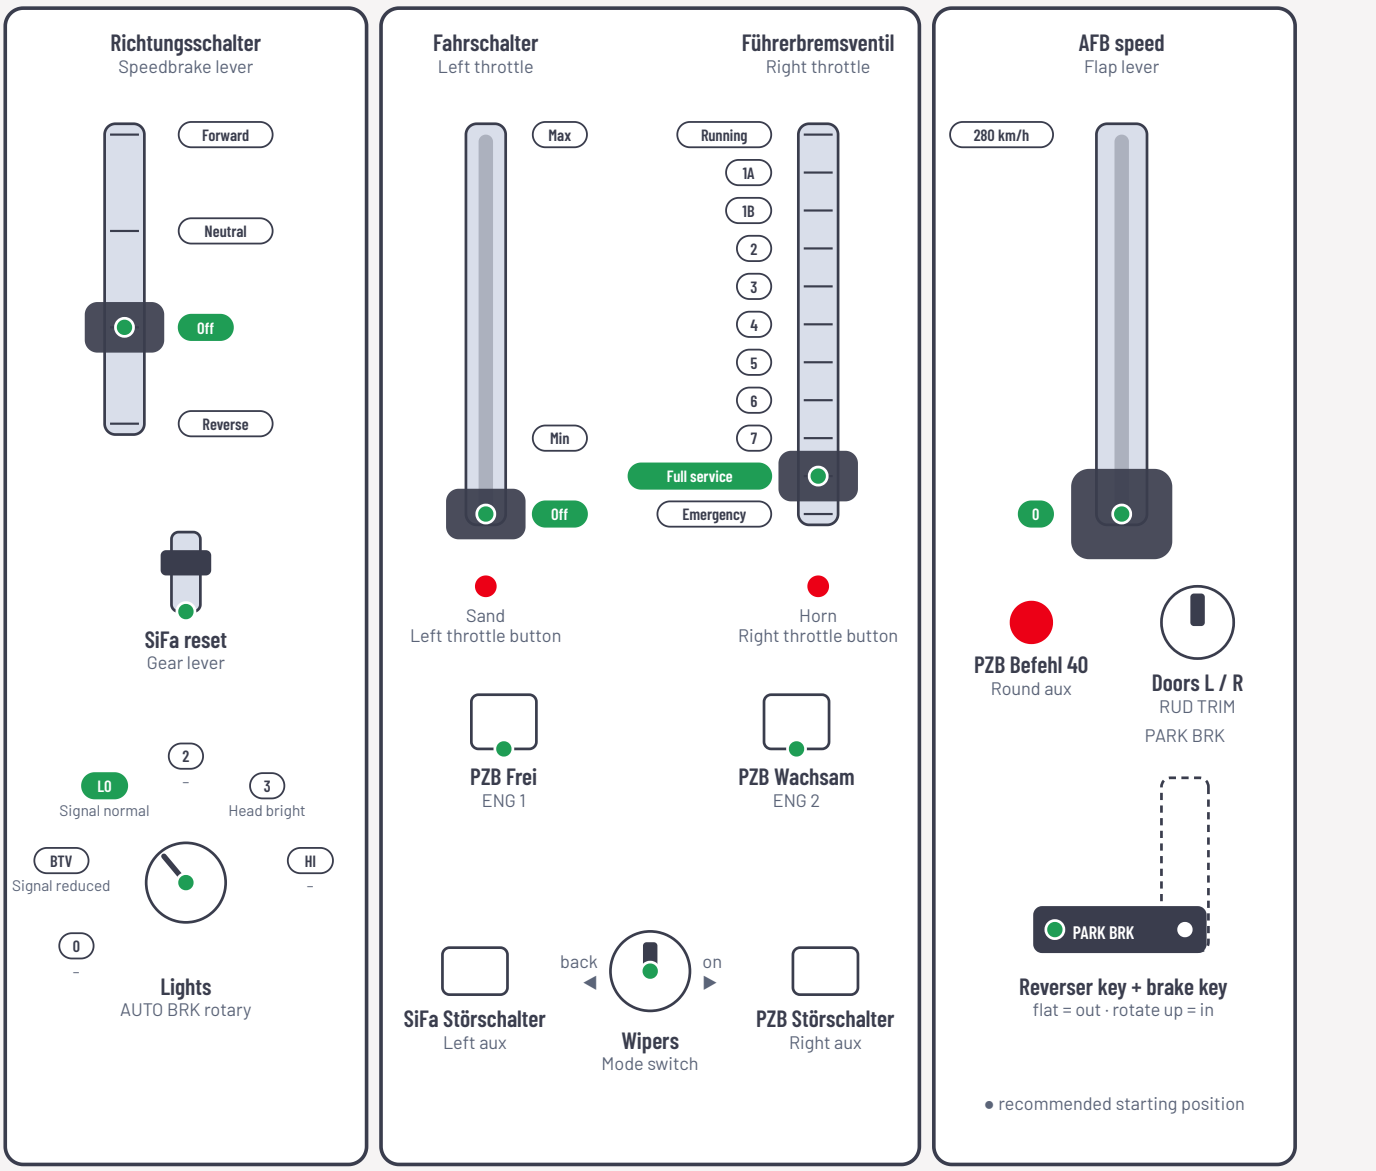

Cab setup

- Reverser key and brake key in (PARK BRK), battery on
- Richtungsschalter from Off to Neutral
- Raise the pantograph and close the Hauptschalter in the cab
- SiFa, PZB and LZB on (Störschalter unlit), PZB mode set
- Lights to Signal normal
- AFB on (ABT button in the cab) if you drive with the speed setter; open doors (RUD TRIM)

Cleared to depart

- Close doors, check the signal, PZB and LZB
- Richtungsschalter to Forward
- Führerbremsventil to Running, wait for the brakes to release
- Fahrschalter towards Max, or set the AFB speed on the flap lever
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: Führerbremsventil in steps towards Full service





 © TheJAG