
BR 403 ICE 3

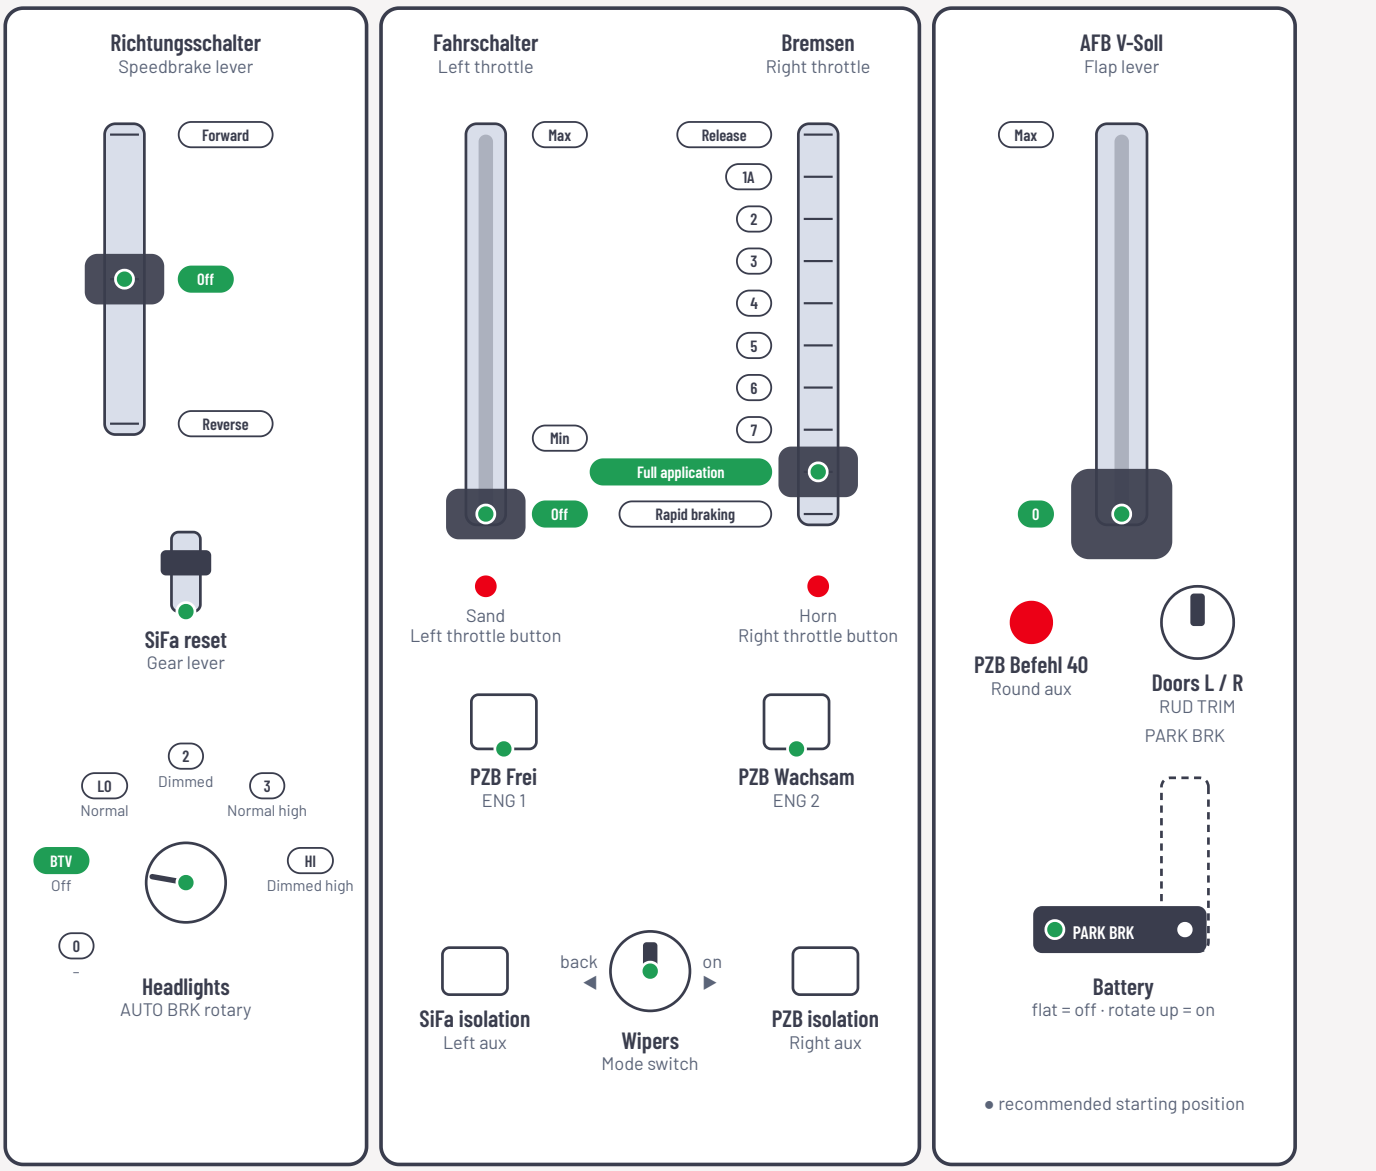


Cab setup

- Battery on (PARK BRK)
- Richtungsschalter to Off, raise the pantograph and close the Hauptschalter in the cab
- SiFa, PZB and LZB isolation switches off (aux squares unlit)
- Headlights to Normal
- AFB V-Soll on the flap lever to the wanted speed
- Open doors (RUD TRIM)

Cleared to depart

- Close doors, check the signal, PZB and LZB
- Richtungsschalter to Forward
- Bremsen to Release
- Fahrschalter towards Max; the AFB holds the set speed
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: Bremsen in steps towards Full application





 © TheJAG