
QA PENDING · DB CARGO · DOVETAIL GAMES · TCA QUADRANT AIRBUS

BR 294

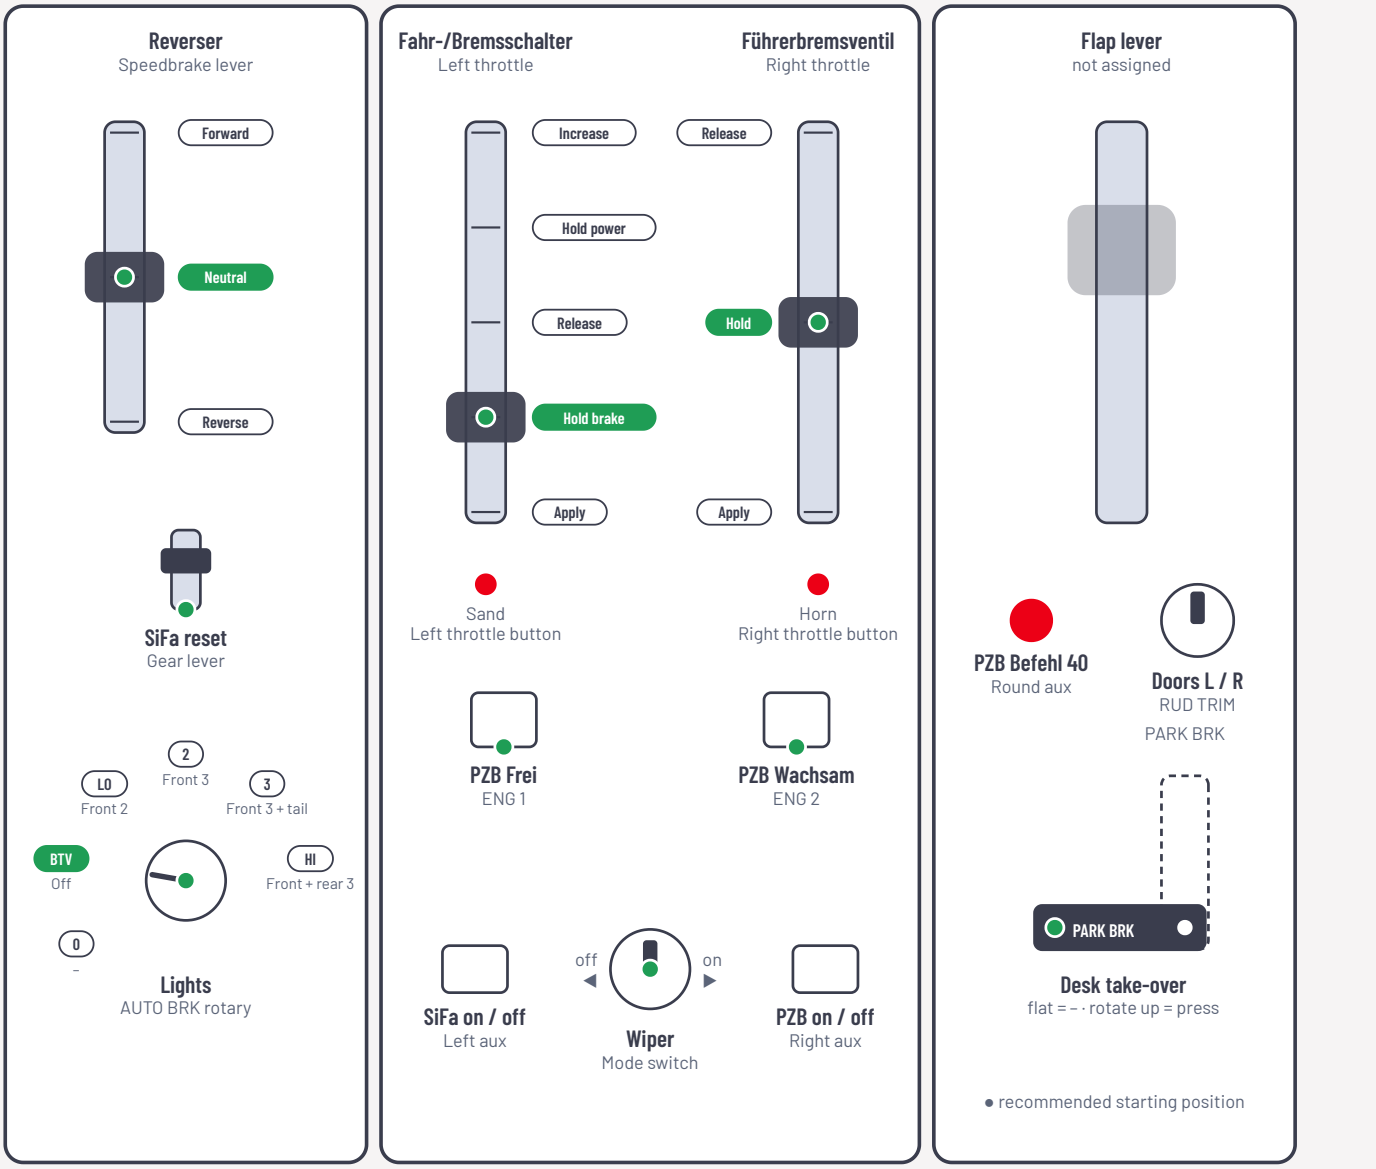

Cab setup

- Battery, engine start and the gear selector (Long distance / Towing / Shunting) in the cab
- Take the left desk over: PARK BRK up (PanelTakeOver), then sit at that desk
- Reverser from Neutral to Forward
- SiFa and PZB on (aux squares), PZB mode in the cab
- Lights to Front 3 or Front + rear for shunting
- Brake selection (loco / train brake) in the cab; no AFB, the flap lever is free

Cleared to depart

- Check the signal and PZB, release the handbrake in the cab
- Führerbremsventil to Release (far end), wait for the brakes to release
- Fahr-/Bremsschalter: push to Increase to raise power, back to Hold power to keep it
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: pull the handle past the centre to Apply (pulse) and Hold brake, or the Führerbremsventil to Apply
- Stop: Führerbremsventil to Apply, handle to Release / decrease



Zeichnung: Deutsche Bahn AG, Einsatzmerkblatt BR 204–298 (05/2009) store.steampowered.com/app/4680330 · Profile: TSW | BR 294 | DTG | TheJAG © TheJAG