
BR 423

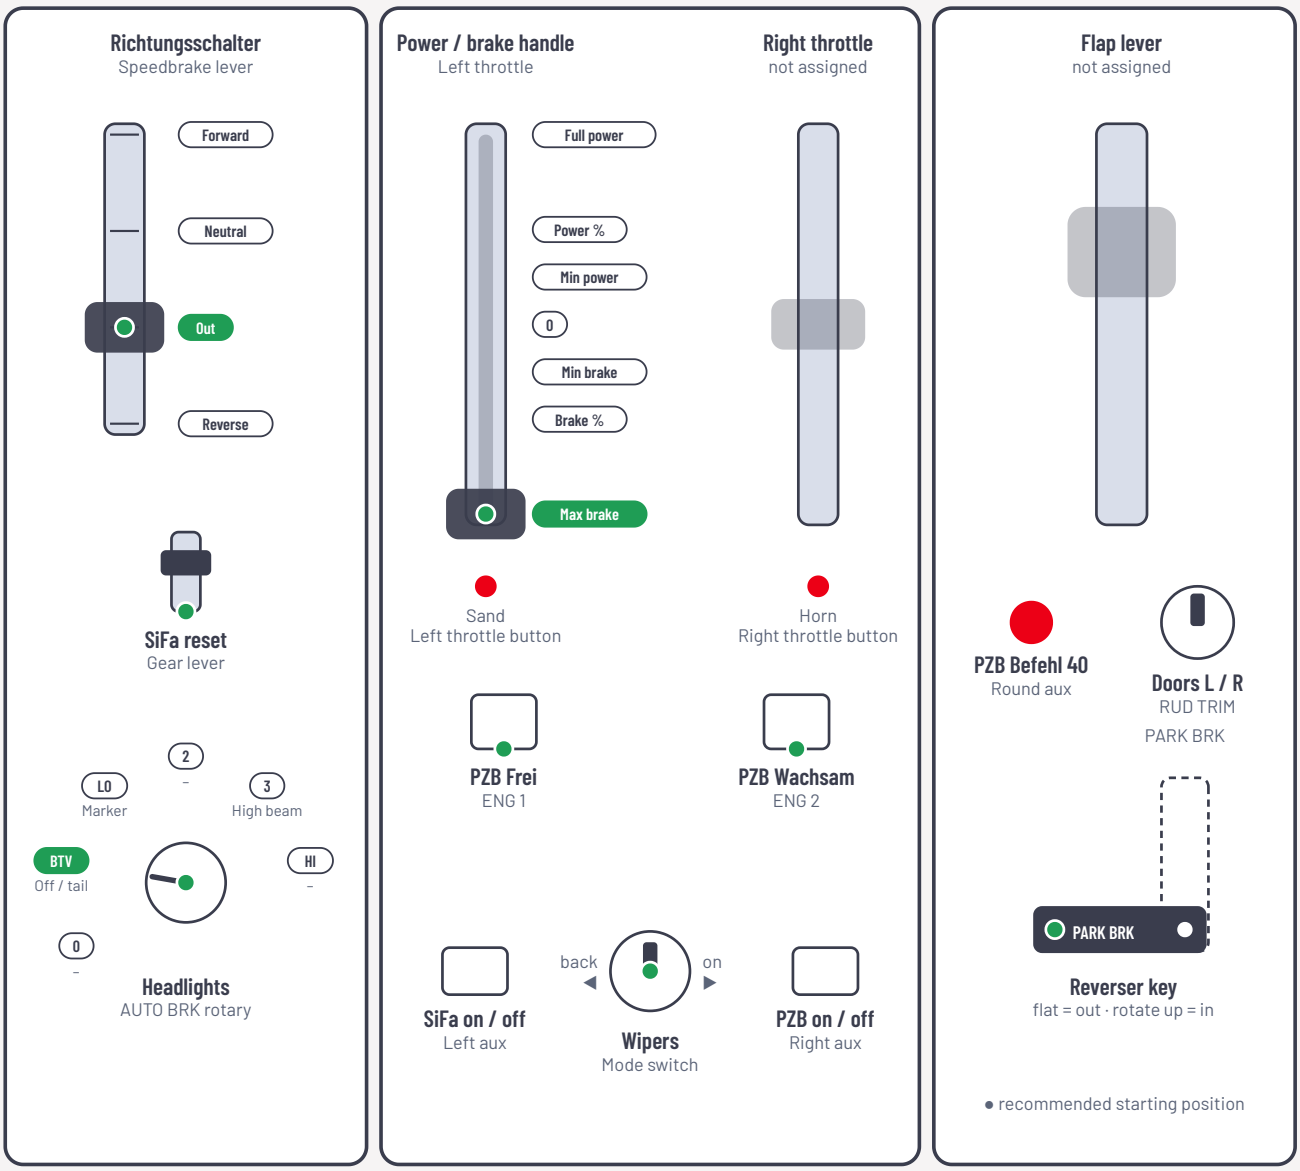

Cab setup

- Reverser key in (PARK BRK), battery started in the cab
- Handle fully back at Max brake
- Raise the pantograph and close the Hauptschalter in the cab
- PZB and SiFa on (aux squares unlit)
- Headlights to Marker
- Open doors (RUD TRIM)

Cleared to depart

- Close doors, check the signal and PZB
- Richtungsschalter to Forward
- Handle forward through Min brake to 0, then Min power and continuous power
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: back past 0 into Min brake, continuous to Max brake
- Doors: RUD TRIM left / right at the platform



Drawing: Qualle and Wiki-Hypo, Wikimedia Commons, CC BY-SA 3.0

© TheJAG