
QA PENDING · DISPOLOK · DOVETAIL GAMES · TCA QUADRANT AIRBUS

ES 64 U2

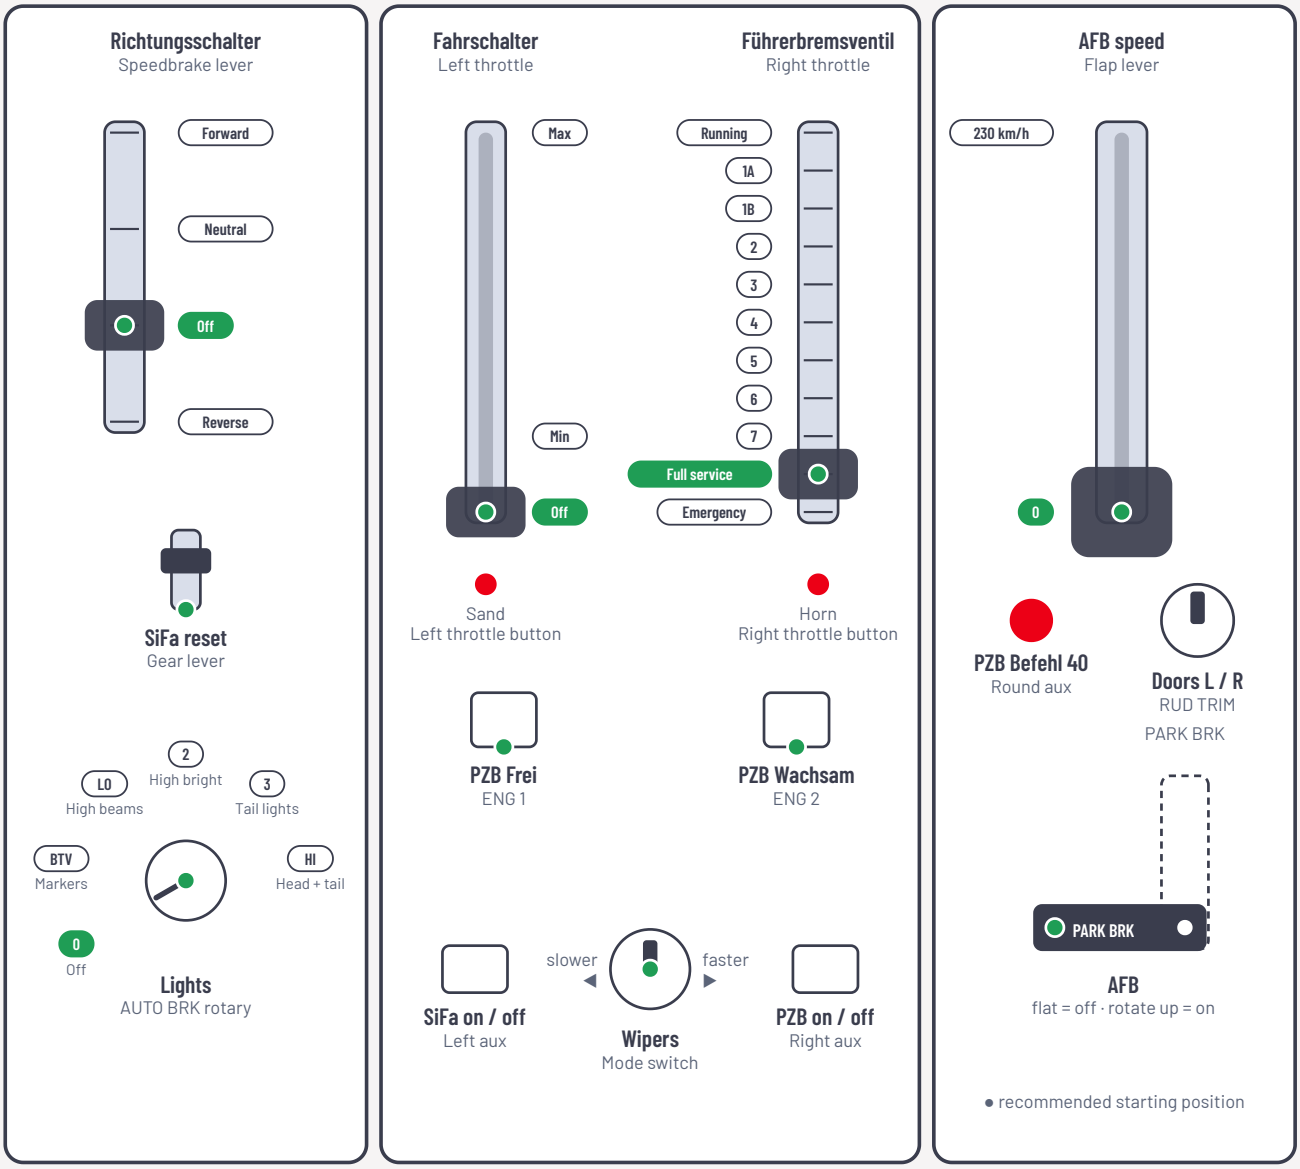

Cab setup

- Battery on in the cab, parking brake released
- Richtungsschalter from Off (the key position) to Neutral
- Raise the pantograph and close the Hauptschalter in the cab
- SiFa and PZB on (aux squares), PZB mode and brake selector set in the cab
- Lights (AUTO BRK)
- AFB on (PARK BRK up) if you drive with the speed setter

Cleared to depart

- Check the signal and PZB
- Richtungsschalter to Forward
- Führerbremsventil to Running, wait for the brakes to release
- Fahrschalter towards Max, or set the AFB speed on the flap lever
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: Führerbremsventil in steps; the E-brake lever stays in the cab



Zeichnung: Deutsche Bahn AG, Einsatzmerkblatt BR 182 (11/2008) store.steampowered.com/app/4679530 · Profile: TSW | ES 64 U2 | DTG | TheJAG © TheJAG