
Vossloh G6

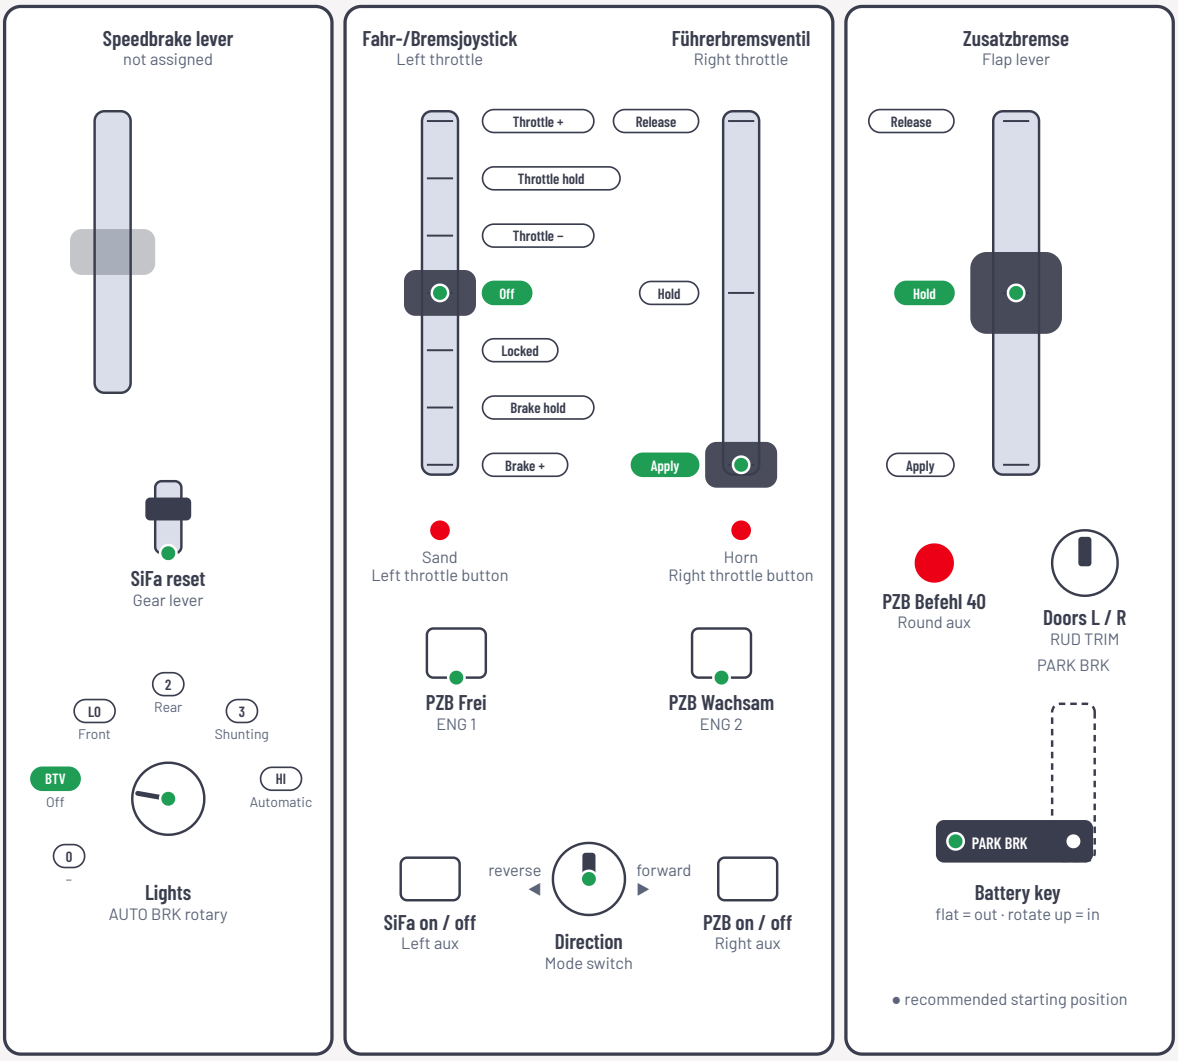

Cab setup

- Battery key in (PARK BRK); engine start, gear and HLL cut-off valve in the cab
- SiFa and PZB on (aux squares; both load off), PZB mode in the cab
- Direction: mode switch right once = Forward (again = off), left = Reverse; the speedbrake lever is free
- Lights to Front, Shunting or Automatic
- Zusatzbremse at Hold, Führerbremsventil at Apply

Cleared to depart

- Check the signal and PZB, release the parking brake in the cab
- Führerbremsventil to Release (far end), Zusatzbremse to Release
- Joystick: push to Throttle hold, pulse Throttle + (spring) at the far end to raise power
- Acknowledge SiFa with the gear lever, PZB with the ENG switches
- Brake: joystick back through Off to Brake hold, pulse Brake + (spring) nearest you; or the valve to Apply
- Emergency and quick release: only in the cab (spring ends of the valve)





© TheJAG