
F40PH-3C

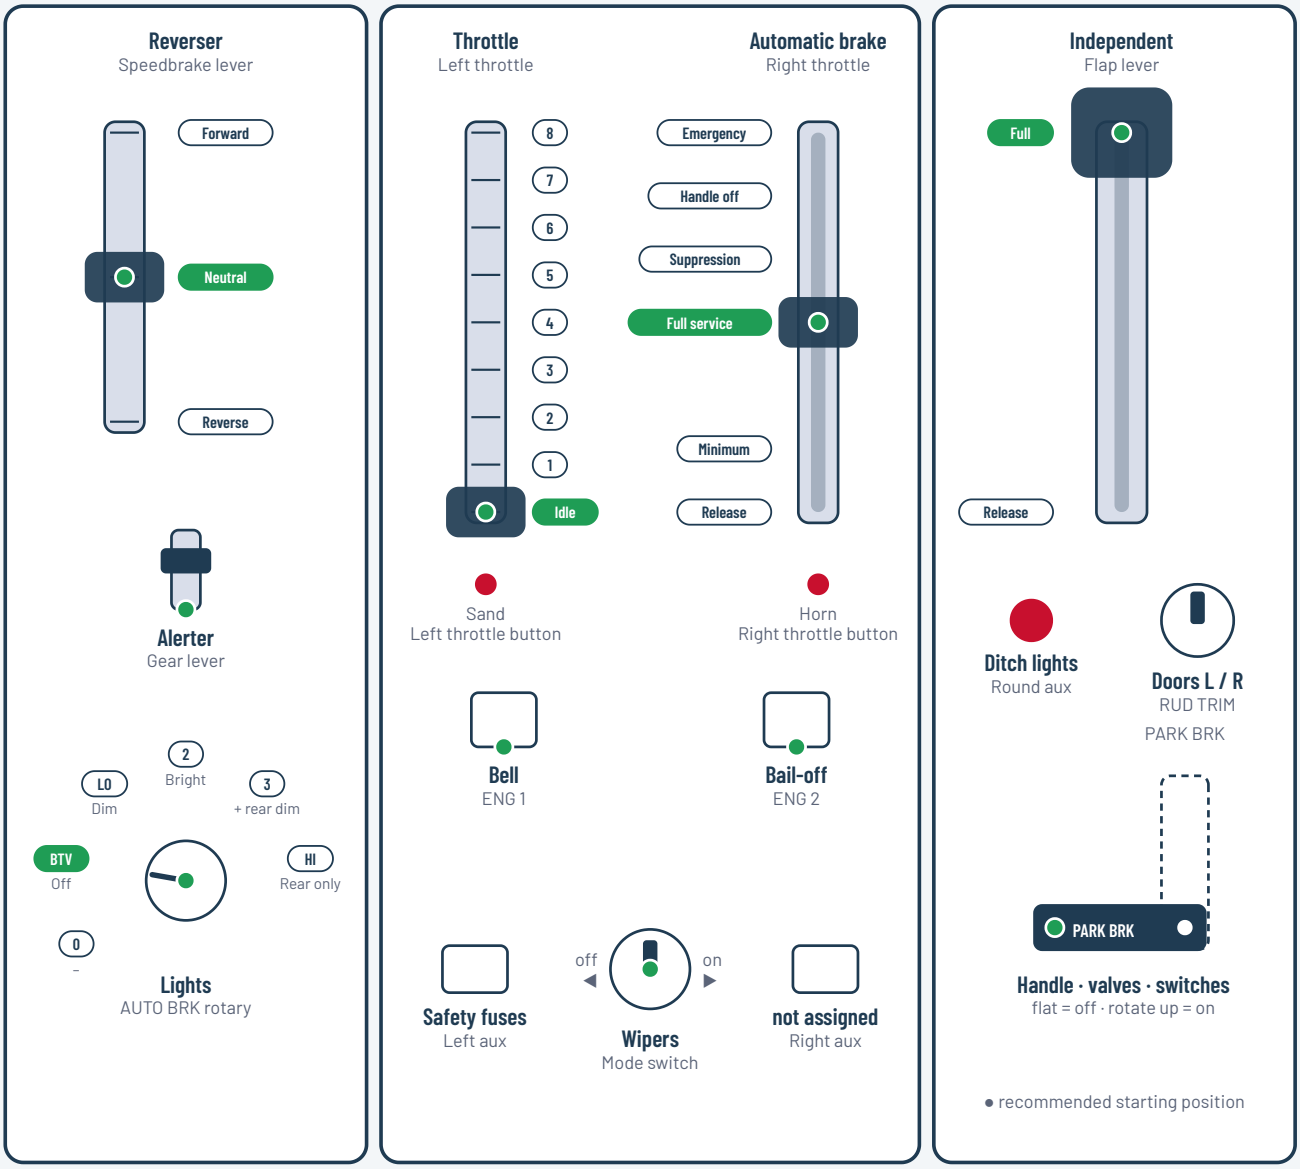

Cab setup

- PARK BRK up: reverser handle in, brake valve cut in, MU-2A to Lead, engine run / generator field / control switches on (the loco loads as a trailing unit with them off)
- Reverser from Neutral to Forward; safety fuses on (left aux lit); HEP in the cab
- Lights to Bright, ditch lights on (round aux)
- Independent at Full, automatic brake at Full service (parked); throttle Idle

Cleared to depart

- Check the signal; bell on (ENG 1)
- Automatic brake to Release; independent to Release, ENG 2 up to bail off
- Throttle notch by notch
- Reset the alerter with the gear lever
- Brake: throttle to Idle, automatic brake into the service zone, independent for the final stop; Emergency at the far end



© TheJAG