QA PENDING · METROLINK · DOVETAIL GAMES · TCA QUADRANT AIRBUS

F125

METROLINK

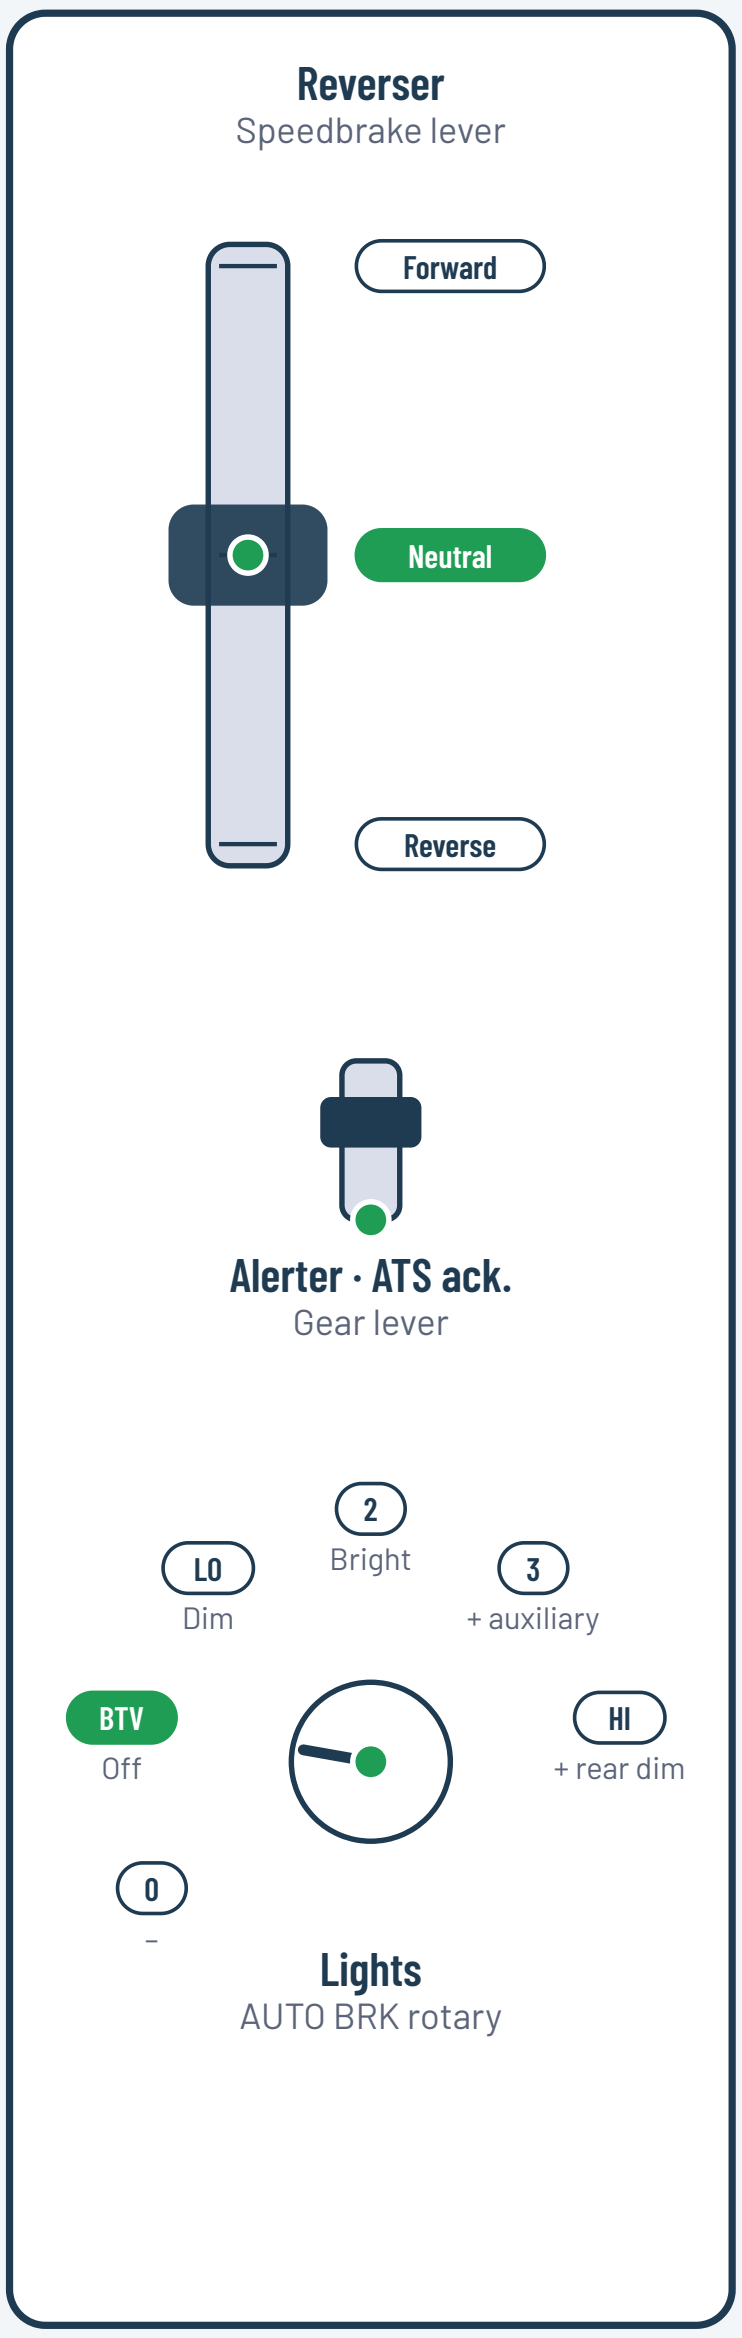

Reverser
Speedbrake lever

Forward
Neutral
Reverse

Alerter · ATS ack.
Gear lever

LO
Dim
2
Bright
3
+ auxiliary
BTV
Off
HI
+ rear dim
0
-

Lights
AUTO BRK rotary

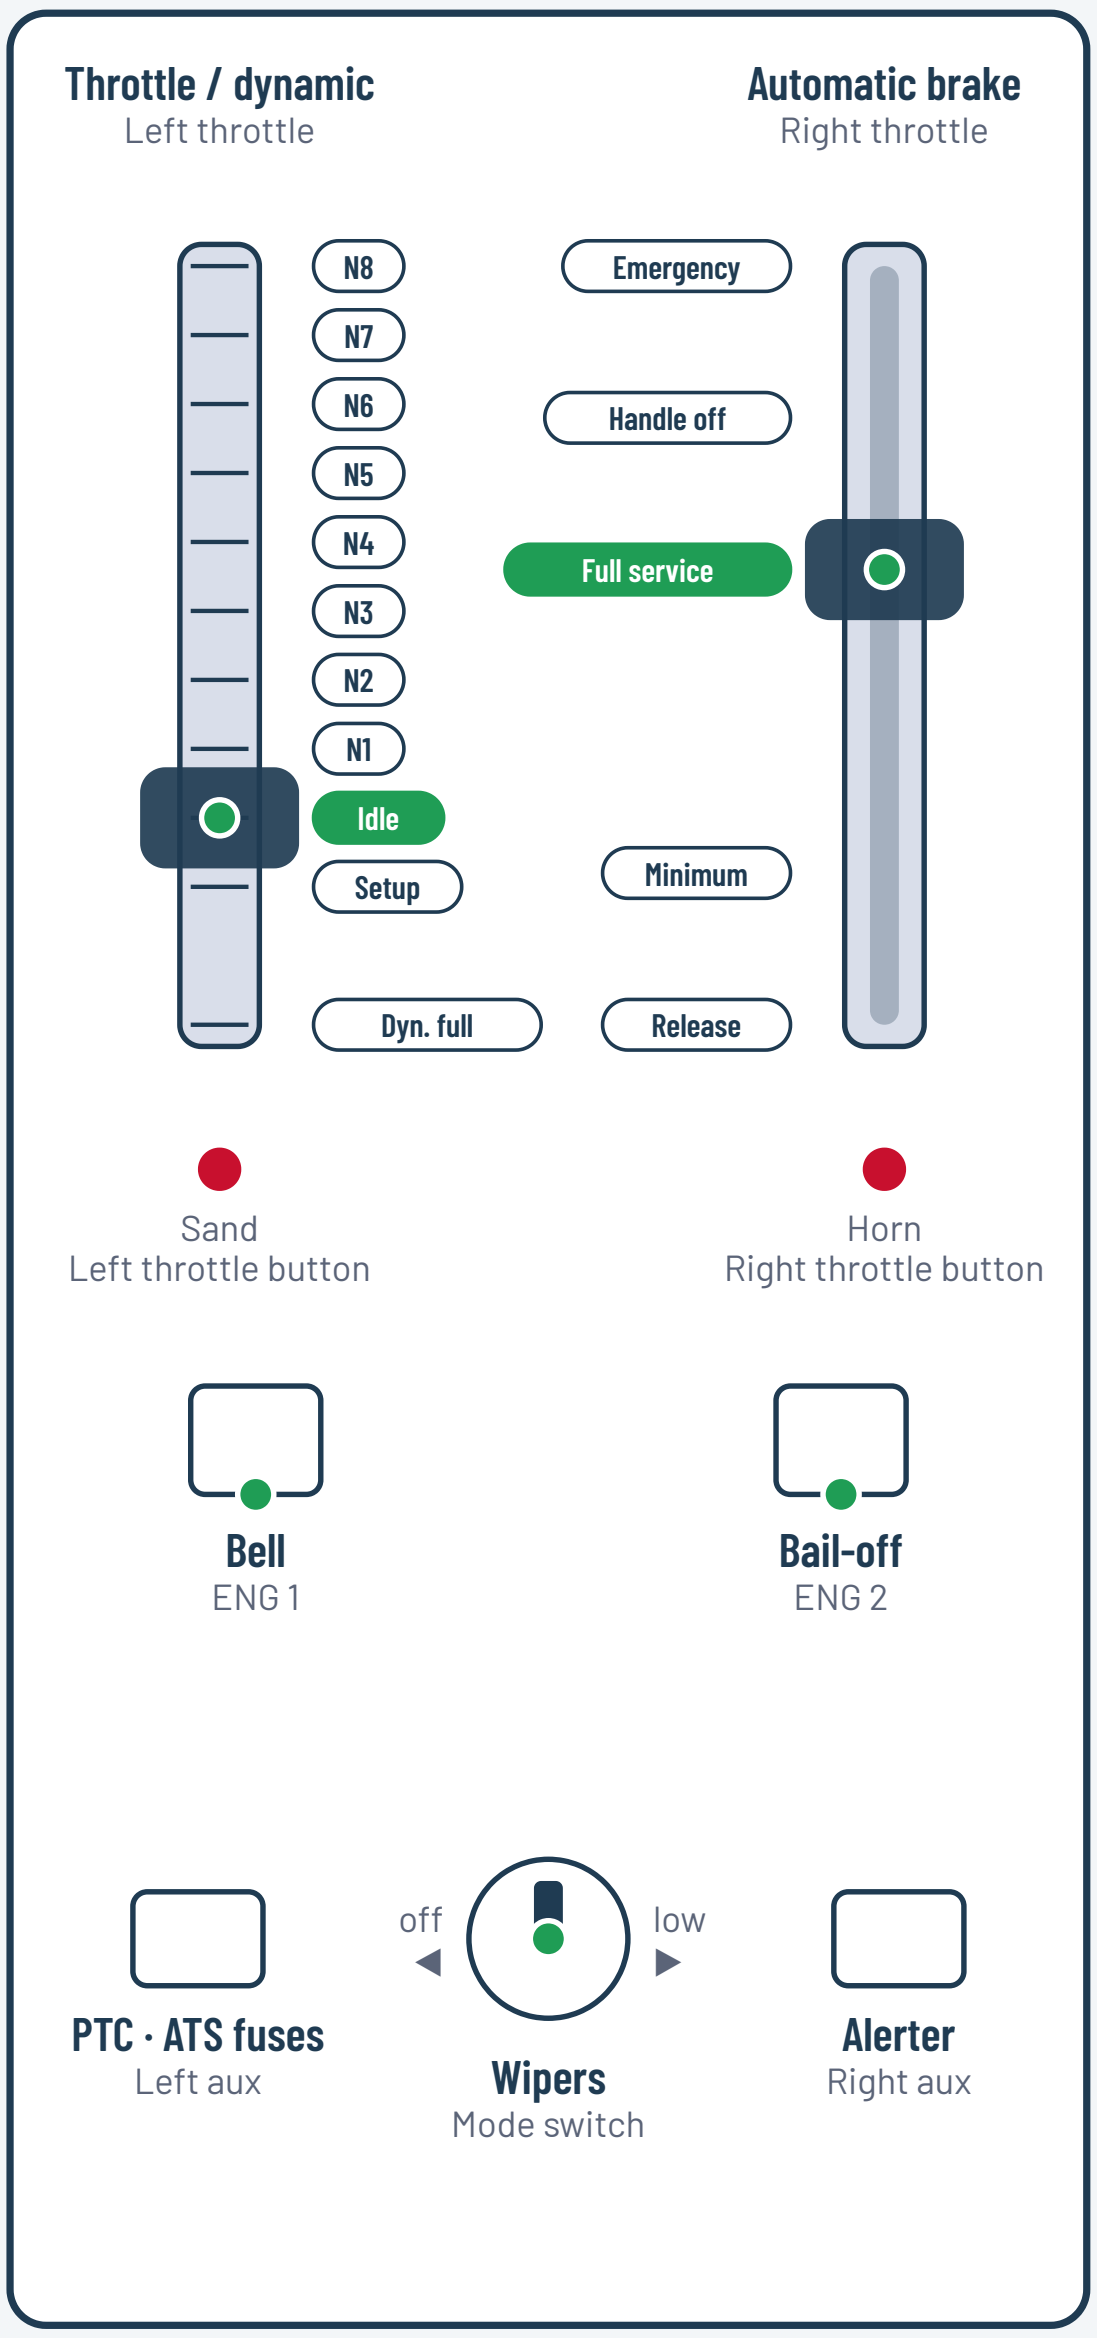

Throttle / dynamic
Left throttle

N8
N7
N6
N5
N4
N3
N2
N1
Idle
Setup
Dyn. full

Automatic brake
Right throttle

Emergency
Handle off
Full service
Minimum
Release

Sand
Left throttle button

Horn
Right throttle button

Bell
ENG 1

Bail-off
ENG 2

PTC · ATS fuses
Left aux

off
low

Wipers
Mode switch

Alerter
Right aux

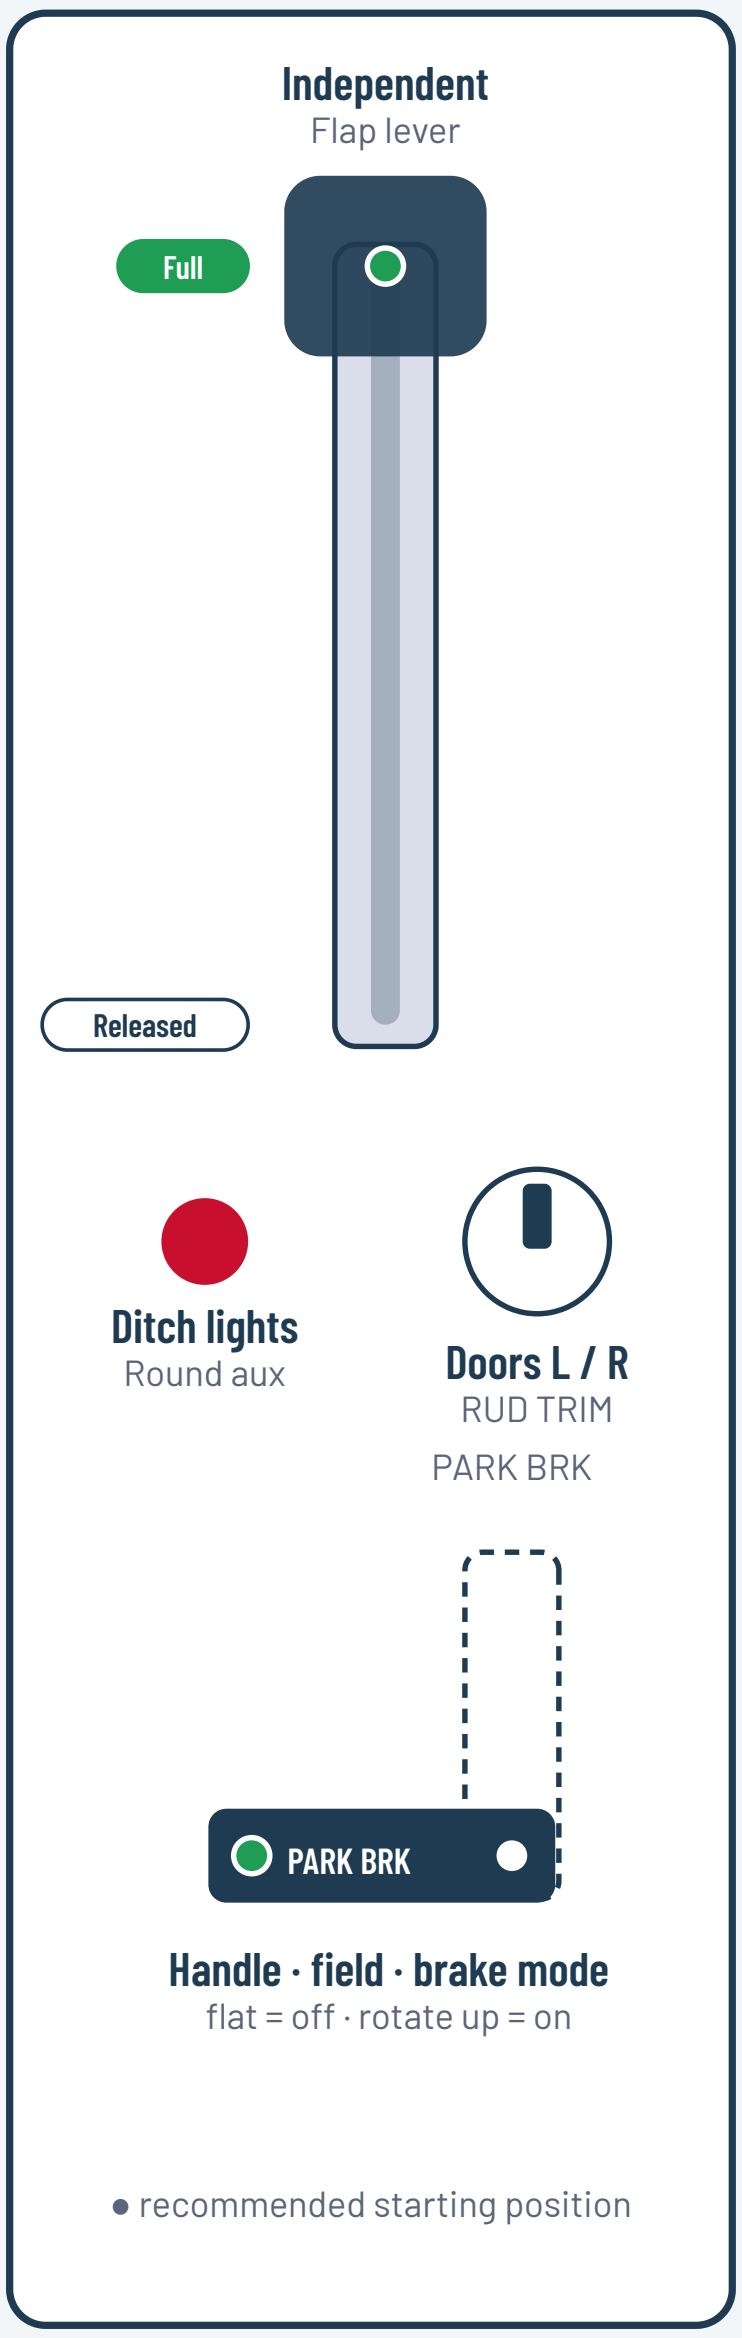

Independent
Flap lever

Full
Released

Ditch lights
Round aux

Doors L / R
RUD TRIM

PARK BRK

PARK BRK

Handle · field · brake mode
flat = off · rotate up = on

● recommended starting position

Cab setup

- PARK BRK up: reverser handle in, generator field on, brake mode to Passenger (the loco loads in Test with the field off); HEP in the cab
- Handle at Idle, then reverser from Neutral to Forward (it only moves at Idle)
- PTC / ATS fuses and alerter on (aux squares lit)
- Lights to Bright, ditch lights on (round aux)
- Independent at Full, automatic brake at Full service (parked)

Cleared to depart

- Check the signal; bell on (ENG 1)
- Automatic brake to Release (the lever ramps through the gates); independent to Released, ENG 2 up to bail off
- Handle away from you: N1 … N8
- Reset the alerter and the ATS with the gear lever
- Brake: handle back through Idle and Setup into the dynamic zone; automatic brake into the service zone (Suppression sits mid-zone); Emergency at the far end

store.steampowered.com/app/4680120 · Profile: TSW | Metrolink F125 | DTG | TheJAG

© TheJAG