QA PENDING

NORFOLK SOUTHERN · DOVETAIL GAMES · TCA QUADRANT AIRBUS

GP38-2

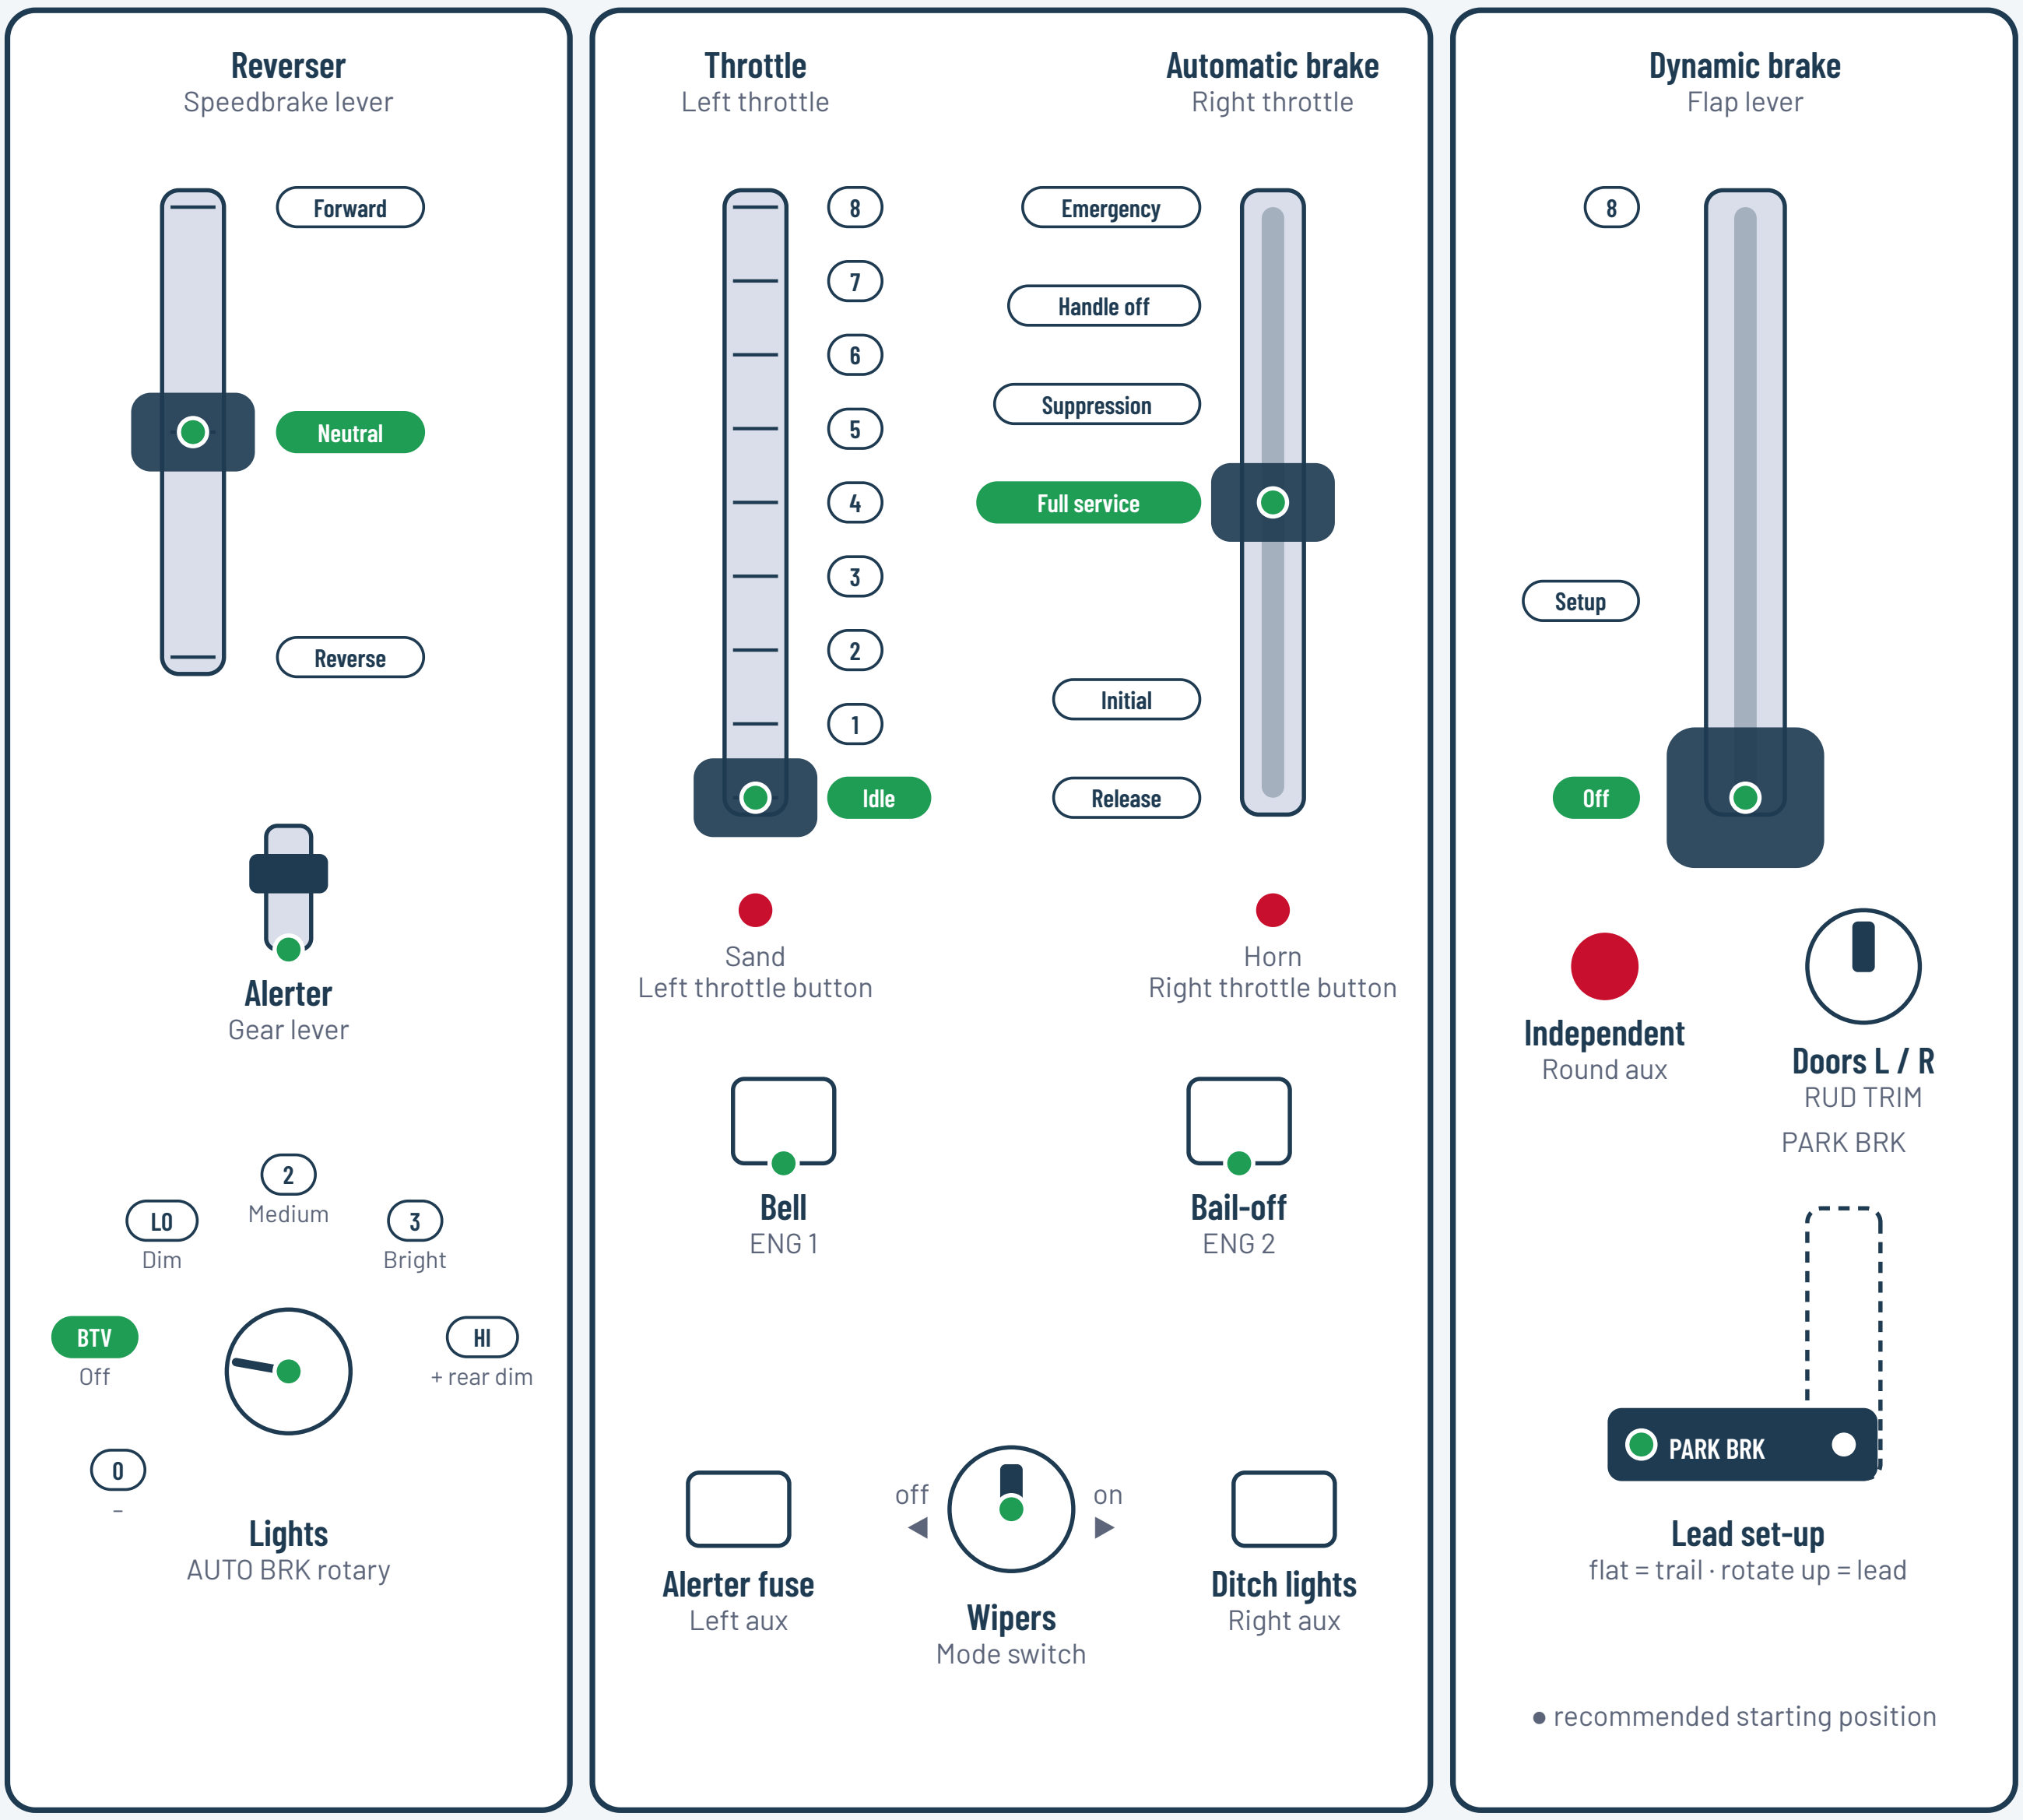

Reverser
Speedbrake lever

Forward
Neutral
Reverse

Alerter
Gear lever

2
Medium
LO
Dim
3
Bright
BTV
Off
HI
+ rear dim
0
-

Lights
AUTO BRK rotary

Throttle
Left throttle

8
7
6
5
4
3
2
1
Idle

Automatic brake
Right throttle

Emergency
Handle off
Suppression
Full service
Initial
Release

Sand
Left throttle button

Horn
Right throttle button

Bell
ENG 1

Bail-off
ENG 2

Alerter fuse
Left aux

off
on

Wipers
Mode switch

Ditch lights
Right aux

Dynamic brake
Flap lever

8
Setup
Off

Independent
Round aux

Doors L / R
RUD TRIM

PARK BRK

PARK BRK

Lead set-up
flat = trail · rotate up = lead

● recommended starting position

Cab setup

- PARK BRK up: lead set-up (reverser handle in, engine run / generator field / control switches on, brake valve to Freight, MU-2A valve to Lead; the loco loads as a trailing unit)
- Reverser from Neutral to Forward; alerter fuse on and ditch lights on (aux squares lit)
- Lights to Bright
- Independent applied (round aux lit), automatic brake at Full service (parked); throttle Idle, dynamic Off

Cleared to depart

- Check the signal; bell on (ENG 1)
- Automatic brake to Release; round aux out to release the independent, ENG 2 up to bail off
- Throttle notch by notch; keep the dynamic brake Off while powering
- Reset the alerter with the gear lever
- Brake: throttle to Idle, dynamic brake past Set up into the zone; automatic brake into the service zone for the stop, Emergency at the far end

store.steampowered.com/app/4679280 · Profile: TSW | Norfolk Southern GP38-2 | DTG | TheJAG

© TheJAG