
SD40-2

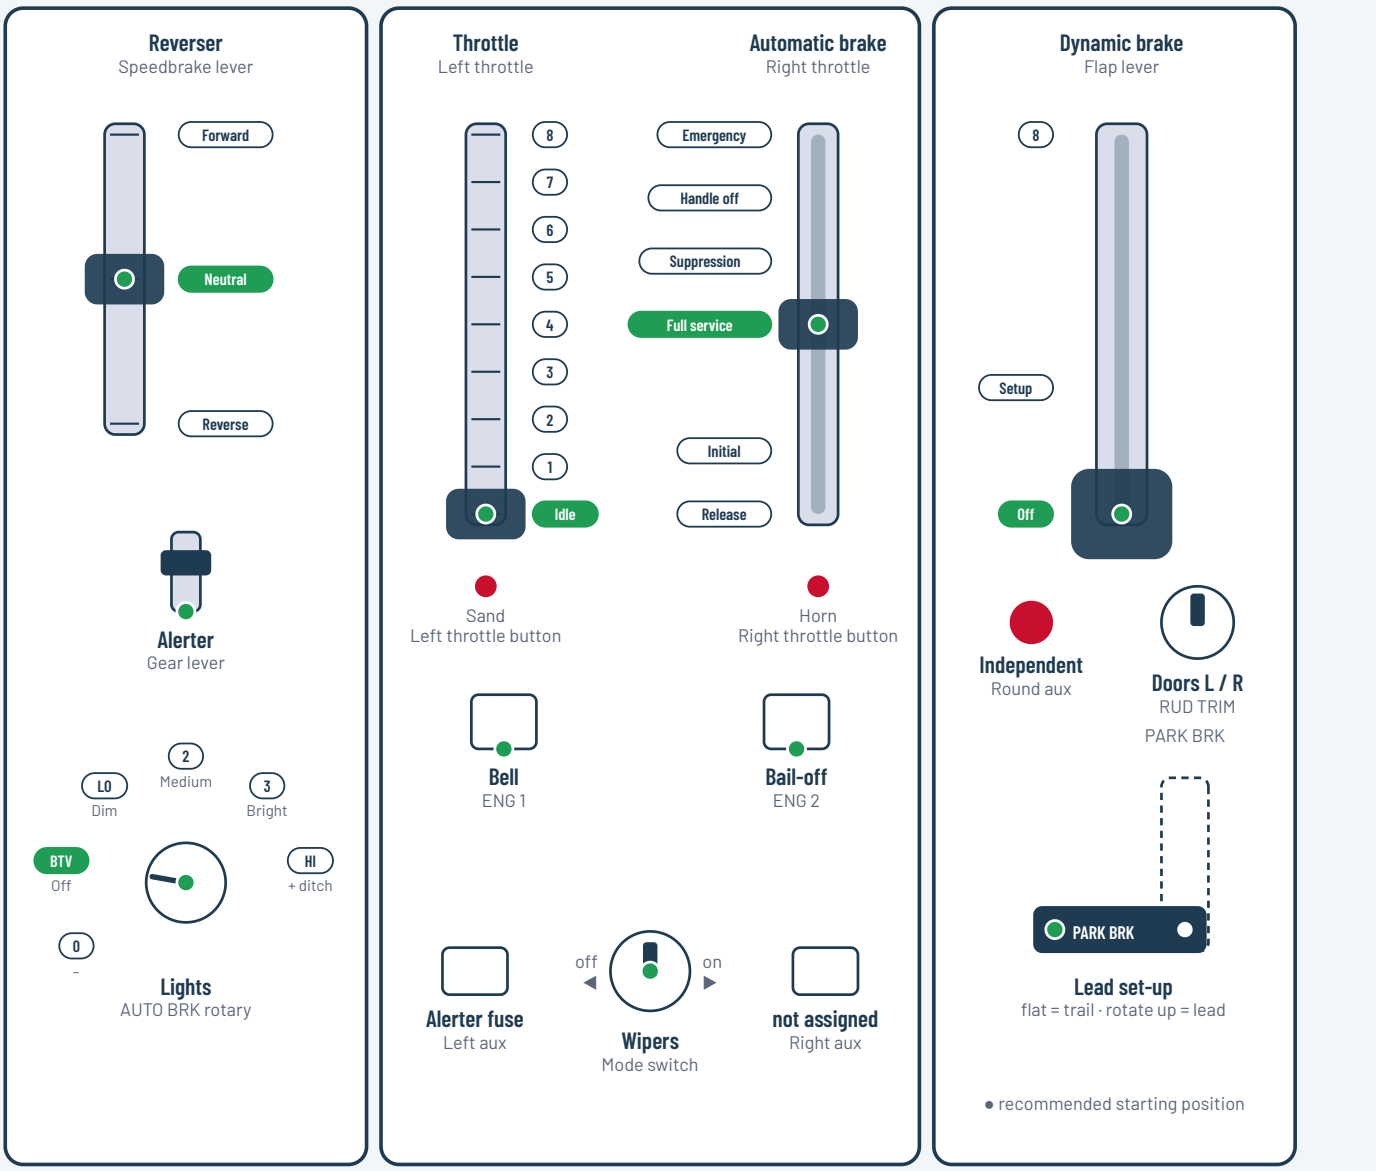

Cab setup

- PARK BRK up: lead set-up (reverser handle in, generator field / engine run / control and fuel pump on, cut-off pilot valve to Freight, MU-2A valve to Lead; the loco loads as a trailing unit)
- Reverser from Neutral to Forward; alerter fuse closed (left aux lit)
- Lights to Bright, ditch lights on
- Independent applied (round aux lit), automatic brake at Full service (parked); throttle Idle, dynamic Off

Cleared to depart

- Check the signal; bell on (ENG 1)
- Automatic brake to Release; round aux out to release the independent, ENG 2 up to bail off
- Throttle notch by notch; keep the dynamic brake Off while powering
- Reset the alerter with the gear lever
- Brake: throttle to Idle, dynamic brake past Set up into the zone; automatic brake into the service zone for the stop, Emergency at the far end



© TheJAG