

ESP32-C3 Development Board Product Introduction

1. Product Overview

This development board uses the ESP32-C3-MINI-1U module as the main controller. This module is a single-core microcontroller with integrated Wi-Fi and Bluetooth capabilities. It features a clock speed of up to 160MHz, 4MB of flash memory, and is equipped with a 1.28-inch 240*240 resolution circular IPS display, available in both non-touch and capacitive touchscreen versions. The development board supports 2.4GHz Wi-Fi and Bluetooth Low Energy, making it suitable for various IoT applications, application development, remote IoT development, and further development. The ESP32-C3 module is compatible with various development tools and frameworks, including Arduino IDE, ESP-IDF, and MicroPython. In addition, the module integrates an LCD display, backlight control circuit, and I/O port interfaces for easy expansion and use.

2. Parameters

2.1 Models and Styles 1. Non-touch screen: ESP32-2424S012N-I 2. Capacitive touch screen: ESP32-2424S012C-I 3. White casing (capacitive touch screen): ESP32-2424S012C-I-Y(W) 4. Black casing (capacitive touch screen): ESP32-2424S012C-I-Y(B) 2.2 Main Parameters - Color display: 16-bit color - Processor: RISC-V 32-bit single-core processor, up to 160 MHz - Operating voltage: 5V - Power consumption: 100mA - Screen size: 1.28-inch TFT - Driver chip: GC9A01 - Resolution: 240 * 240 (pixels) - Visible area: $\Phi 32.4$ (mm) - Module dimensions: 38.5 * 37.0 (mm) - Viewing angle: IPS - Operating temperature: -20°C~70°C - Storage temperature: -30°C~80°C - Dimensions: 38.5mm * 37mm 3. Package Contents 1 x Development board



One screen in the palm of your hand

Suitable for various IoT applications, application development, remote IoT development, and further development.



Internet of
things experiment



Sensor
experiment



Mobile control



Scratch 3.0




Mixly

ESP32-2424S012 Motherboard Introduction


ESP32= MCU + WiFi+ BT

This development board is based on the ESP32-C3-MINI-1U module as the main control, single-core MCU, integrated WI-FI and BT functionality of the main frequency of up to 160MHZ, flash size of 4MB, the display resolution of 240 * 240 IPS displays, no touch or capacitive touch can be selected. This module includes LCD display, backlight control circuit, IO port interface and so on.

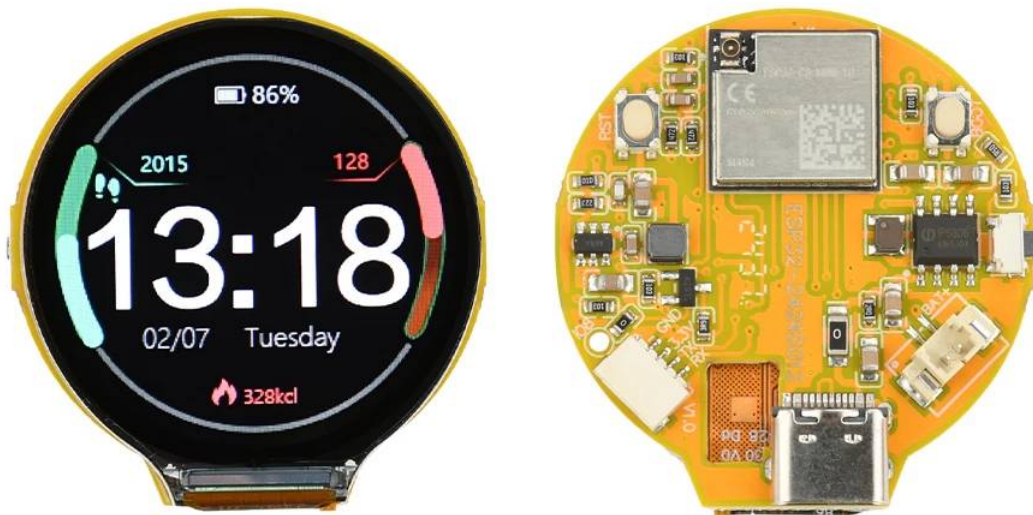

Product Specification

WIFI and BT Development Board

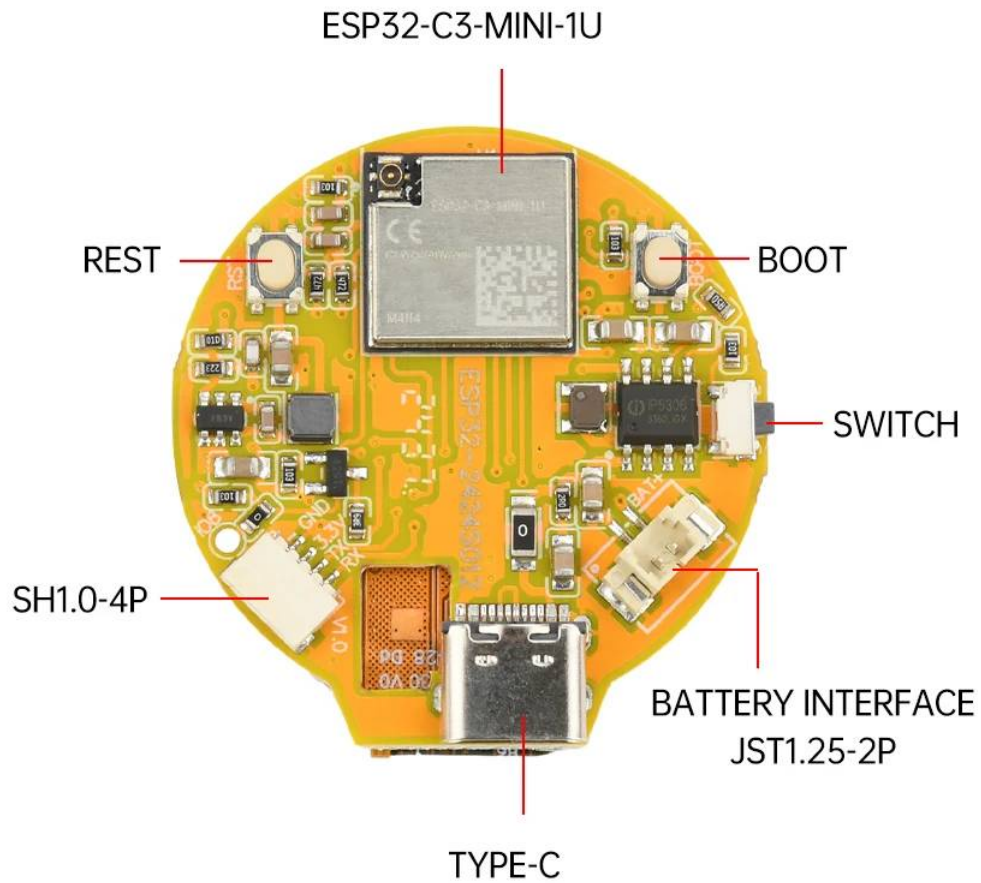



Without Touch_Without Case



Touch_Without Case



Touch_with_case_white



Touch_with_case_black


Remote IoT Development Board

ESP32-24248012 development board, which gives full play to the development of the Internet of Things, is a real Internet of Things development tool with a controllable display screen, which can be used for APP remote control, remote environmental data collection, remote data fusion, remote Parameter settings and other IoT development applications.



Scratch 3.0 programming demonstration


Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Quis ipsum suspendisse ultrices gravida. Risus commodo viverra maecenas accumsan lacus vel facilisis.

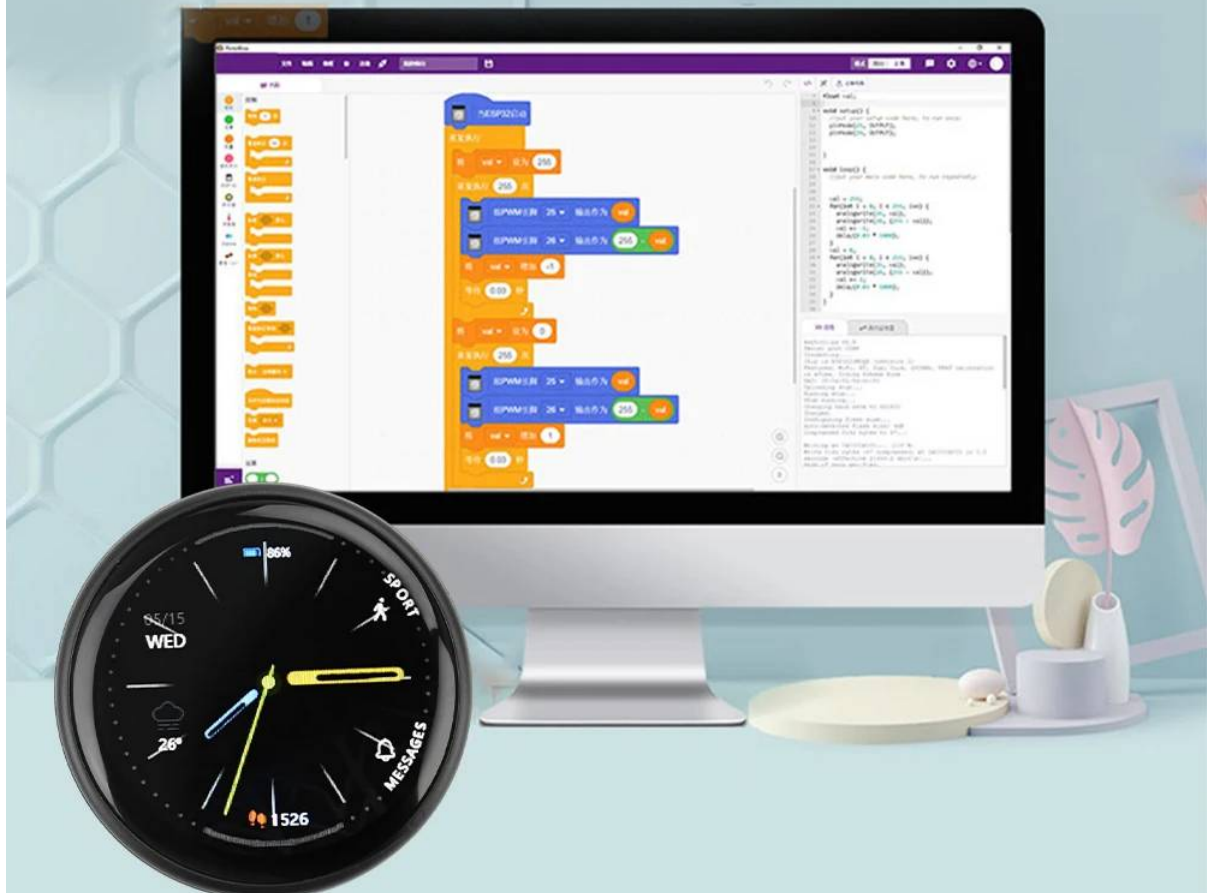


App drag and drop programming

The development of remote IOT app adopts blank app software, which can customize the personalized interface on the terminal device, with rich built-in controls and beautiful U interface. It can customize the app control module and interface, which is very suitable for making an app interface that meets its own requirements.

App custom control display

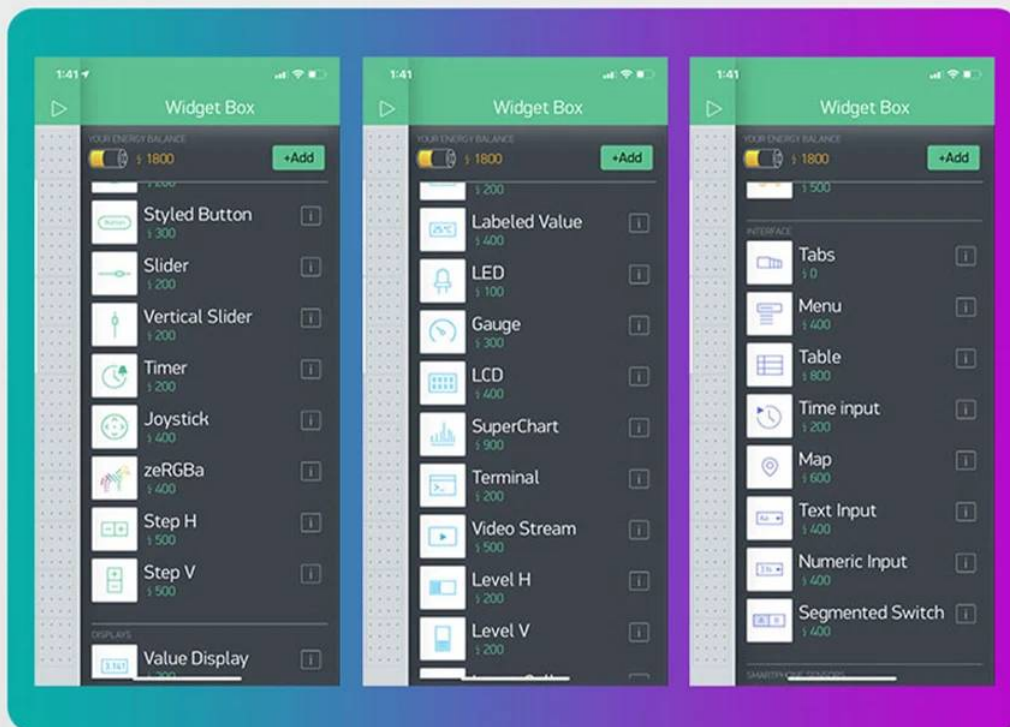


Back of the version with case

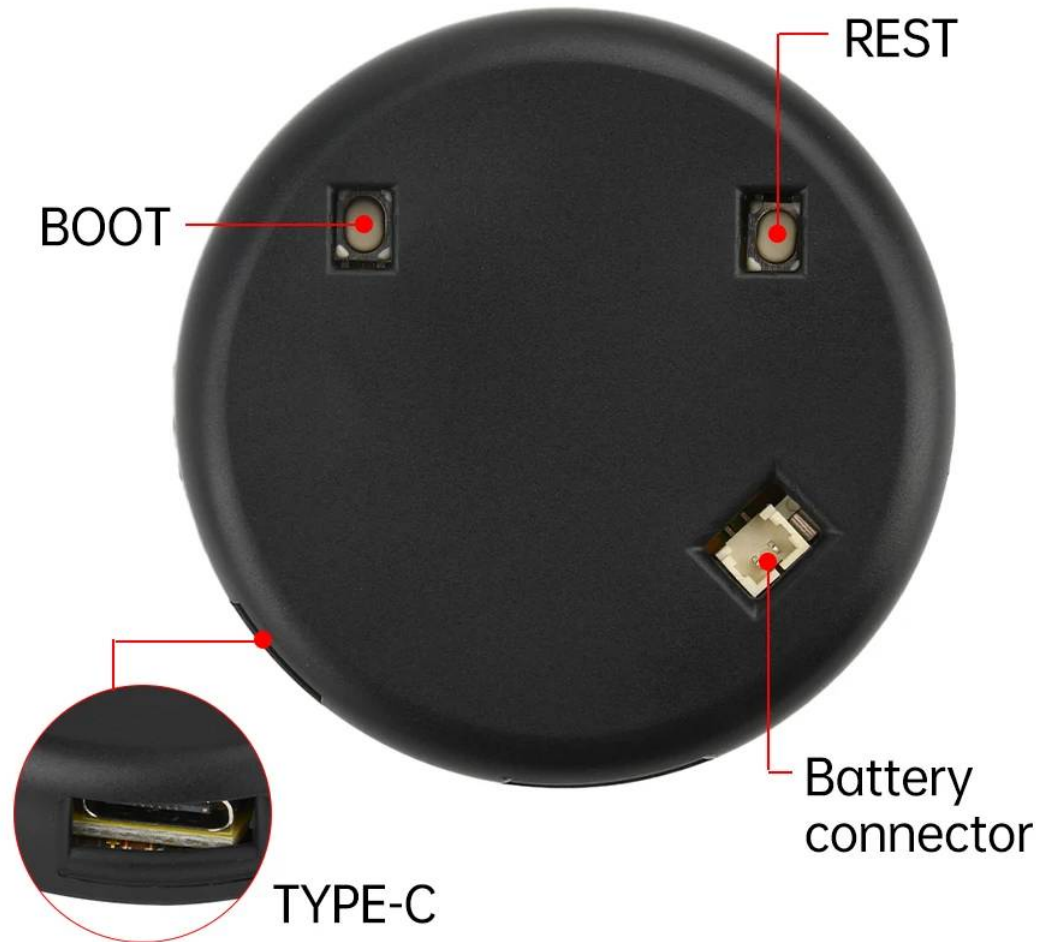

1.28 inch capacitive touch




ESP32-C3+ without touch model (without case)

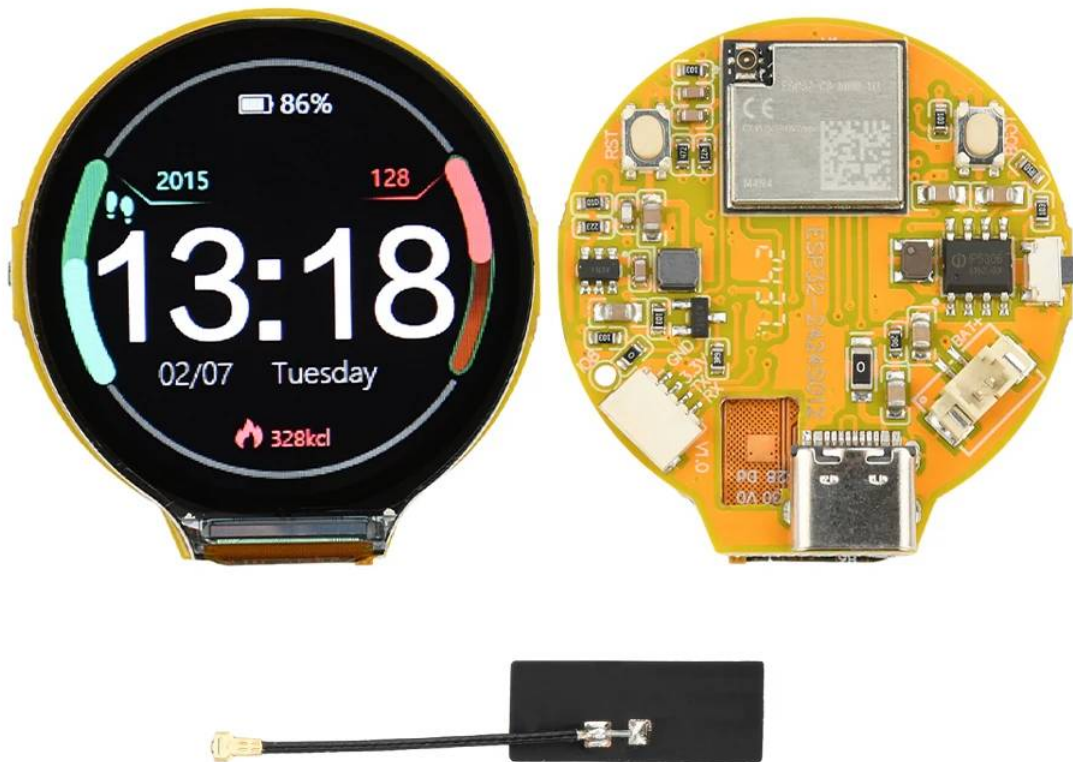

ESP32-C3+ Capacitive Touch Model

(without case)

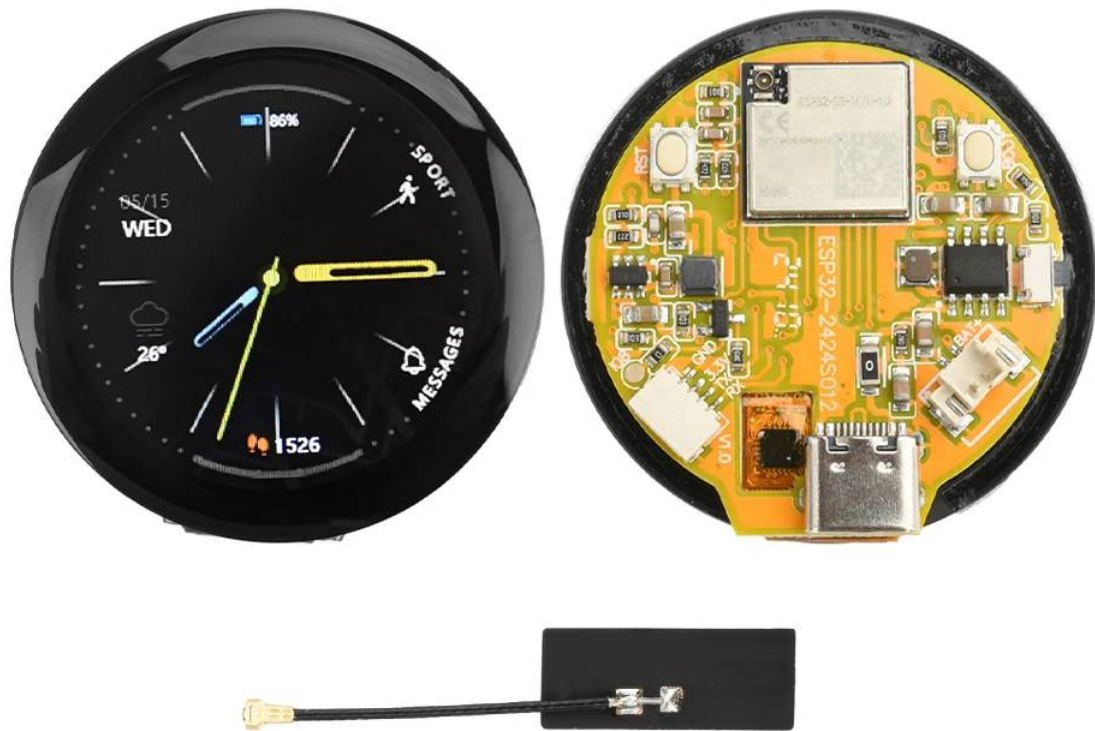

ESP32-C3+ Capacitive Touch Model

(with case white)



ESP32-C3+ Capacitive Touch Model

(with case black)



Product Size



ESP32-C3+ without touch (without case)




ESP32-C3+ Capacitive Touch
Model (without case)



ESP32-C3+ Capacitive Touch
(with case)



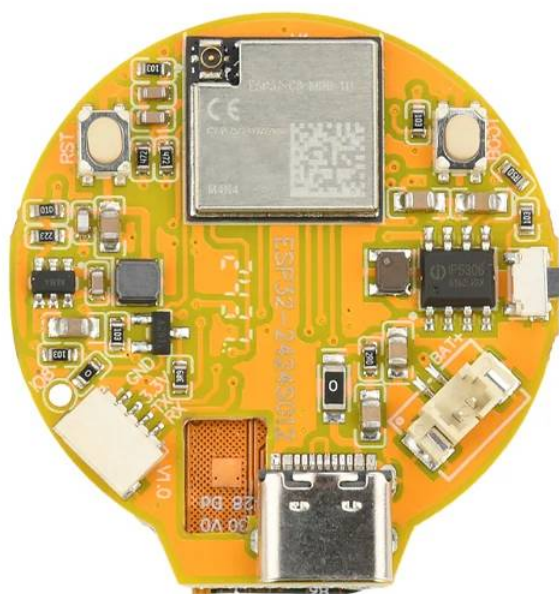



SHOPPING GUIDE



PAYMENT



SHIPMENT

Shipping Method	Courier	Shipping Time
Express Shipping	DHL Express	About 3-10 days
	EMS Shipping	About 3-10 days
Standard Shipping (for order over USD5)	Aliexpress Standard Shipping	About 20-45 days
	Registered Air Mail(china post/e packet-only for USA)	About 40-60 days
Economy Shipping (for order under USD5)	Economy Post(finland economy/ SG economy/China economy)	About 40-60 days

FEEDBACK



If you have any problems about the order, please feel free to contact us.

Item as described : ★★★★★ 5 STAR
Communication : ★★★★★ 5 STAR
Shipping speed : ★★★★★ 5 STAR

If satisfied with our products, kindly leave a 5-star rating and share whit your friends.