

Report No.:XFL300TW-4800K

Test Time: 2025-04-10 16:46

Luminaire Property

Luminaire Manufacturer: LUXIBEL

Voltage: 219.5 V

Power: 286.20 W

Current: 1.328 A

Power Factor: 0.982

Photometric Results

CIE Class: Direct

Measurement Flux: 24580.6 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(10%,50%,80%,100%): H117.9,H49.3,H24.5,H0

Vertical Diffuse Angle(10%,50%,80%,100%): V118.3,V49.4,V25.1,V1

Luminaire Efficacy Rating (LER): 85.94

Max. Intensity: 22608.48 cd

S/MH(C0/C180): 0.73

Total Rated Lamp Lumens: 24580.6 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 22587.51 cd


Pos of Max. Intensity: H90 V1

S/MH(C90/C270): 0.73

Picture Of Luminaire



Luminous Intensity Distribution Curve

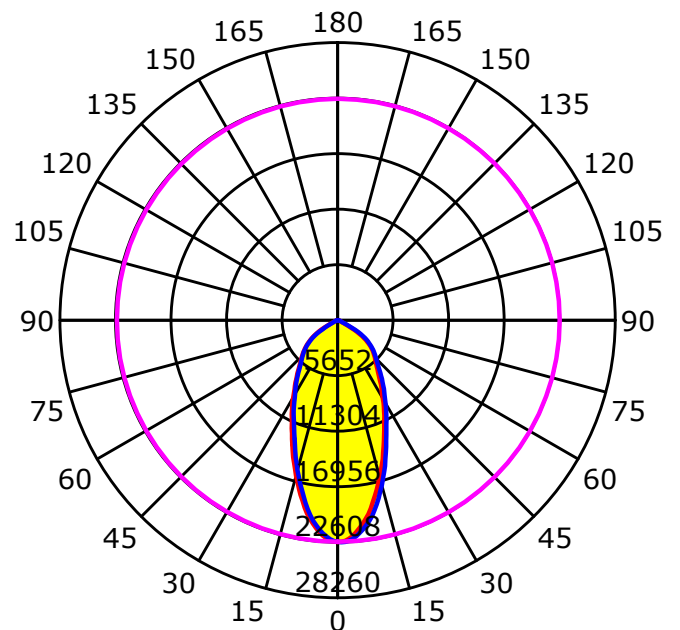

Unit: cd

Average Diffuse Angle(50%): 49.3°

— C0-C180 — C90-C270 — G1

C Plane (°):0.0-360.0: 90.0

Test Lab: BTL

Test Type: TYPE C

Temperature:

Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C


Luminous Intensity Distribution Curve

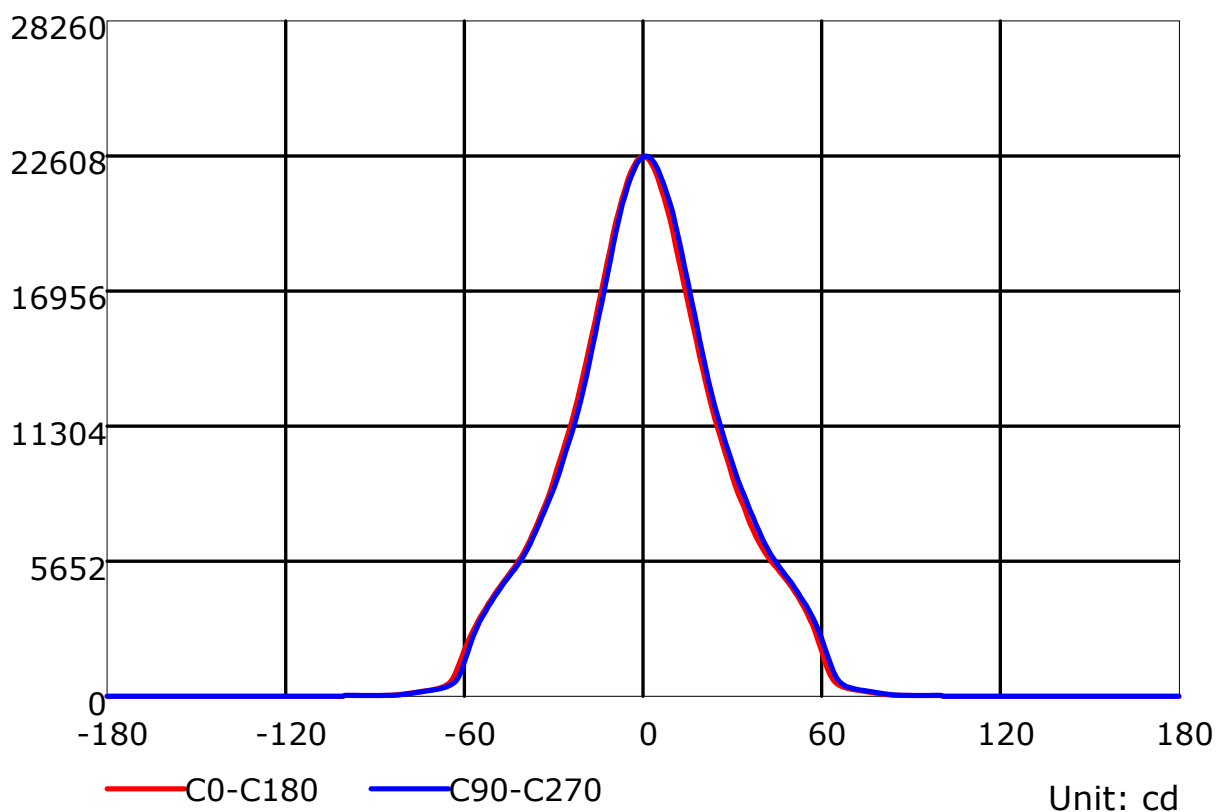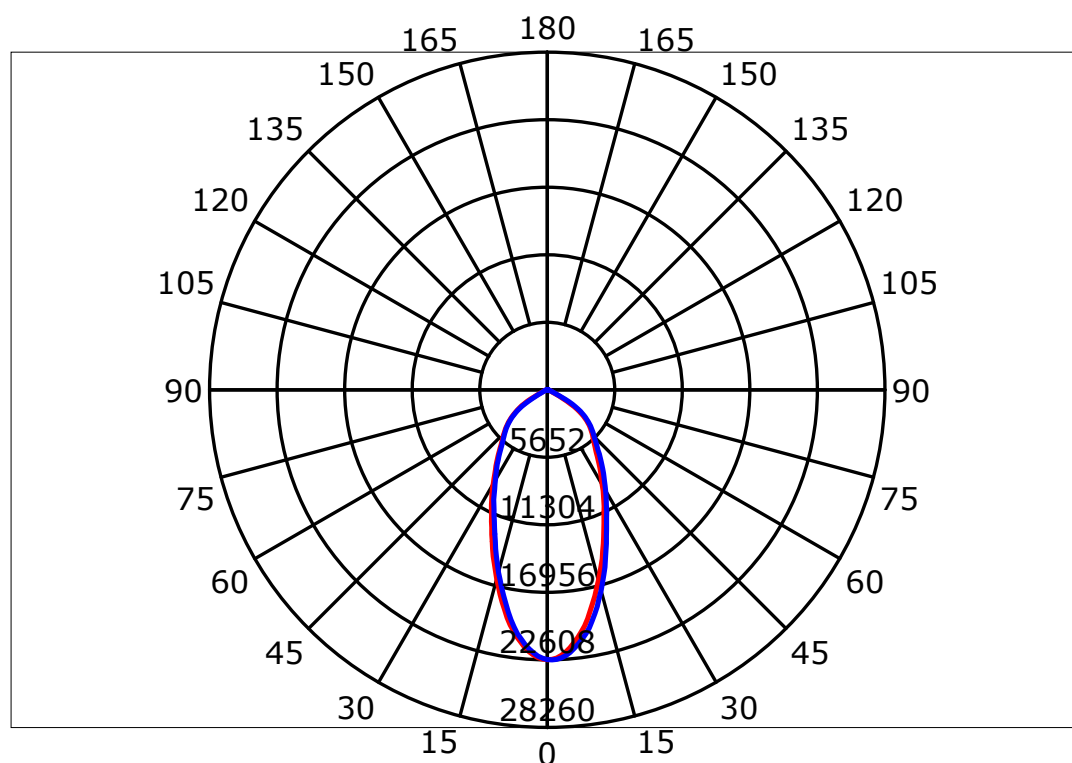

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Luminous Intensity Distribution Curve(cd/klm)

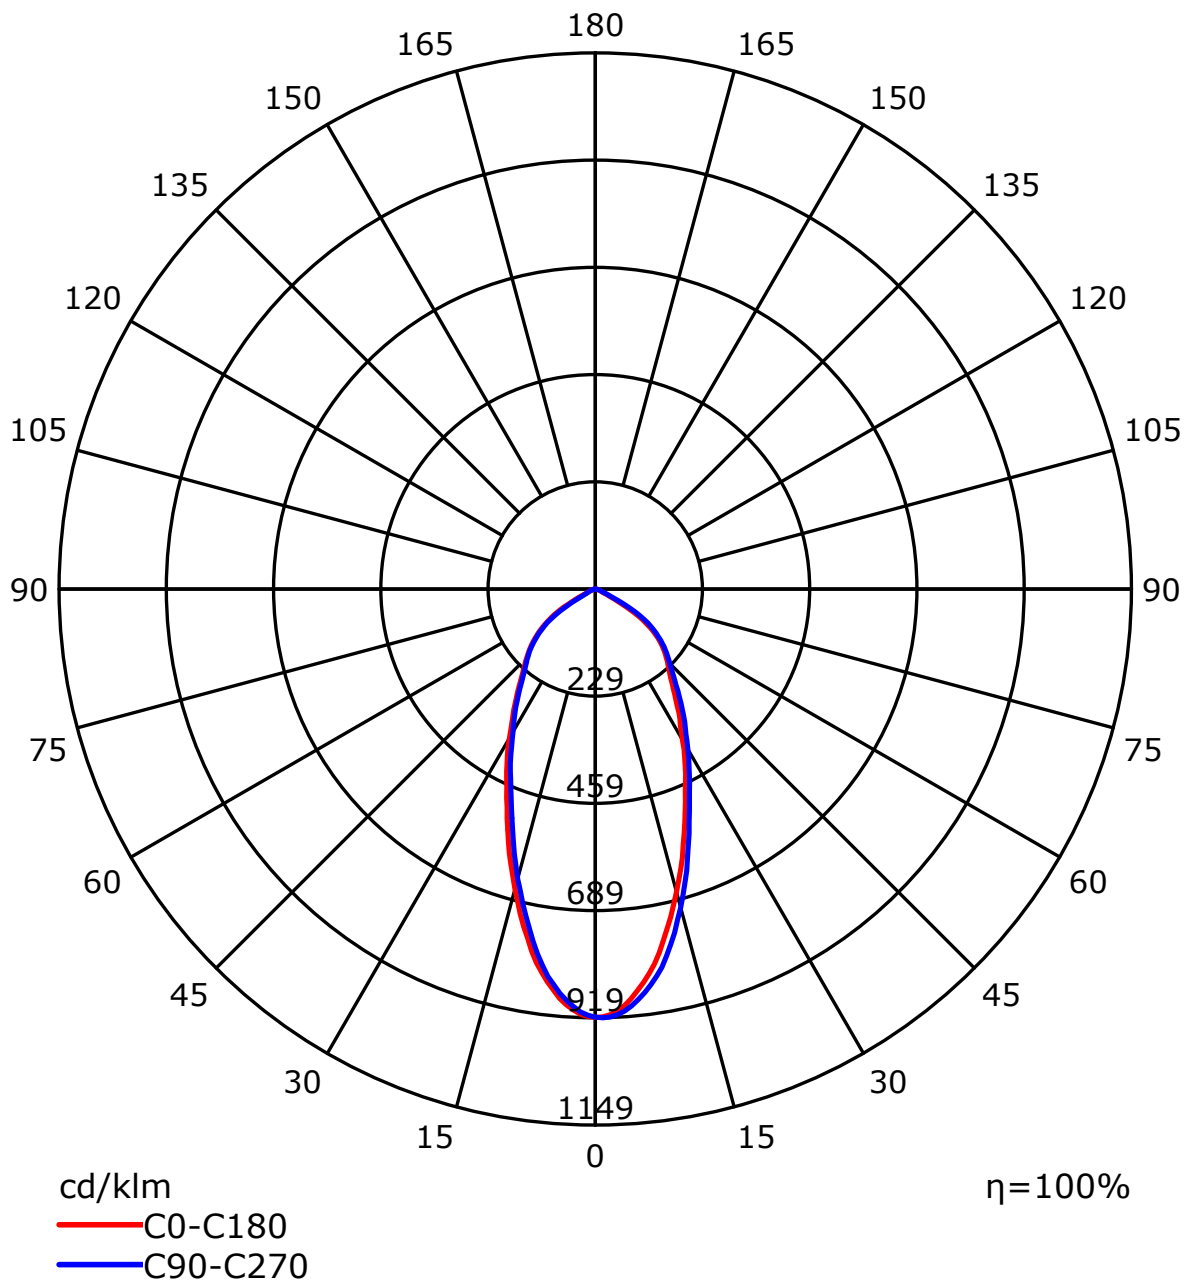


C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	103	109	106	104	101	102	100	98	98	97	95	95	93	92	90
2	105	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82	81
3	98	89	83	78	95	88	82	78	85	80	76	83	78	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	73	68	76	71	67	74	70	66	65
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58
6	80	69	62	56	78	68	61	56	66	60	56	65	59	55	63	59	55	53
7	75	64	56	51	73	63	56	51	61	55	51	60	55	50	59	54	50	48
8	71	59	52	47	69	58	52	47	57	51	47	56	50	46	55	50	46	45
9	67	55	48	43	65	55	48	43	53	47	43	53	47	43	52	46	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	49	43	40	38


Spacing Criteria (0-180): 0.73
 Spacing Criteria (90-270): 0.73
 Spacing Criteria (Diagonal): 0.84

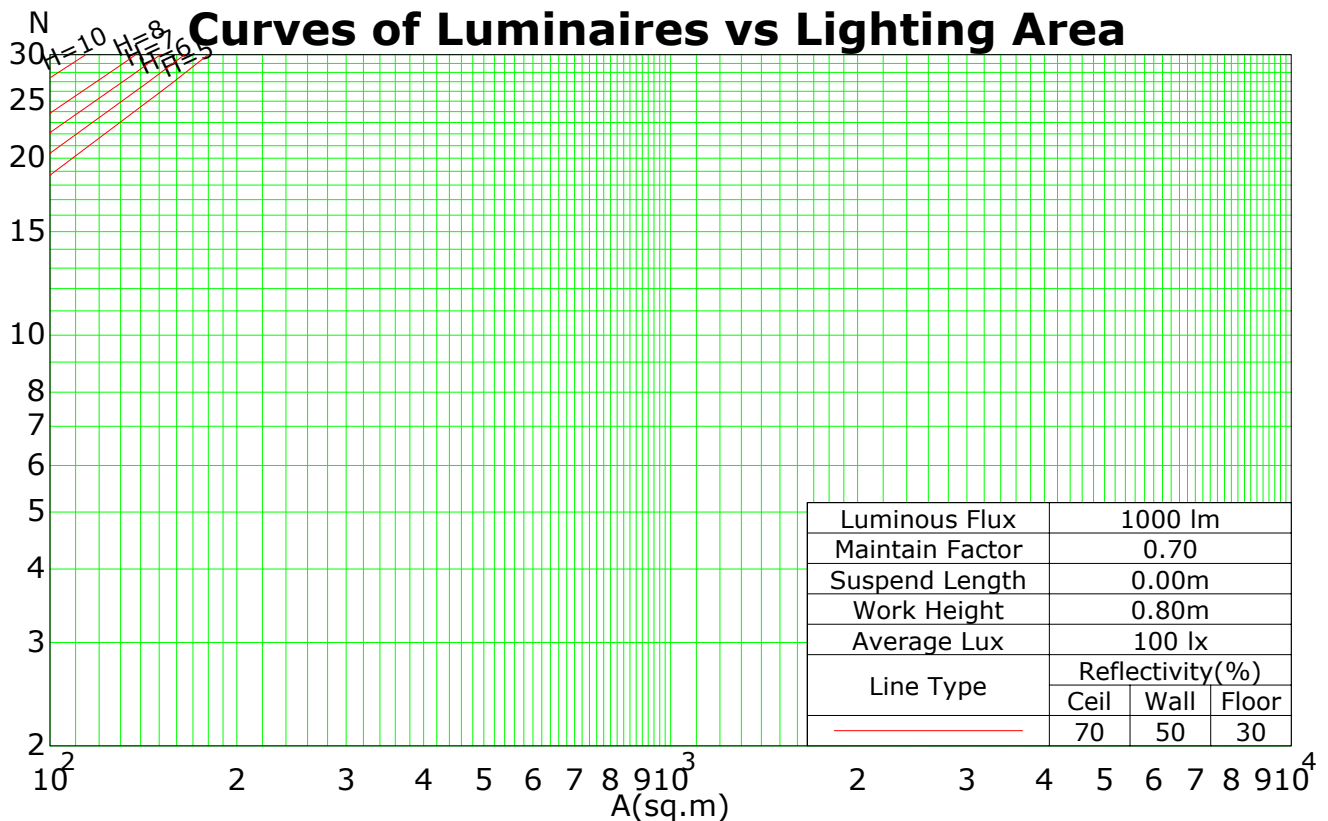

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Isocandela (rectangle)

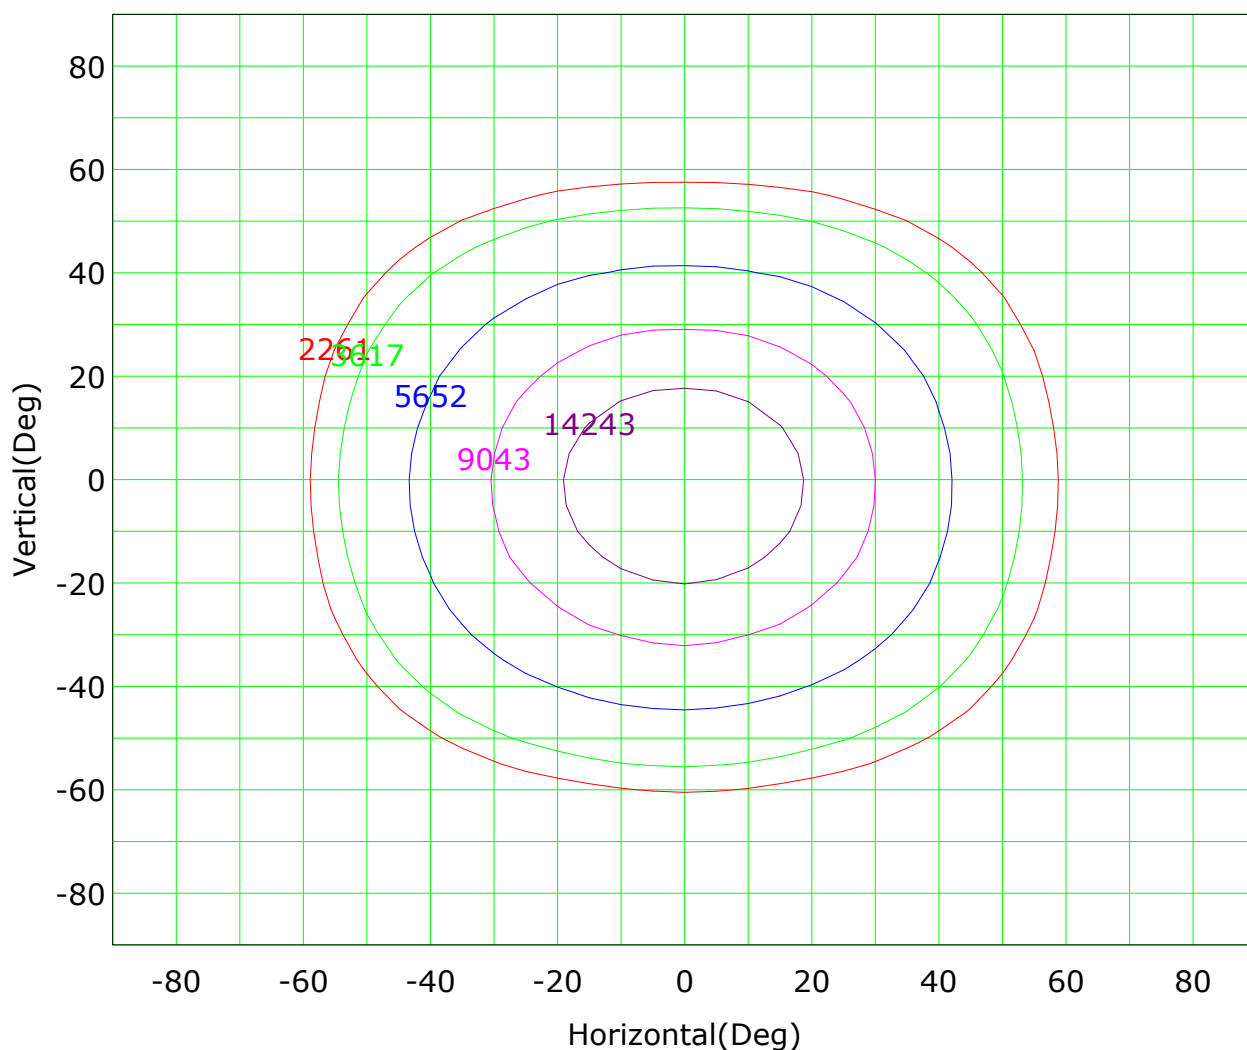


Imax (100%): 22608 cd

(10%): 2261 cd	(16%): 3617 cd
(25%): 5652 cd	(40%): 9043 cd
(63%): 14243 cd	(100%): 22608 cd

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Isocandela (sphere)

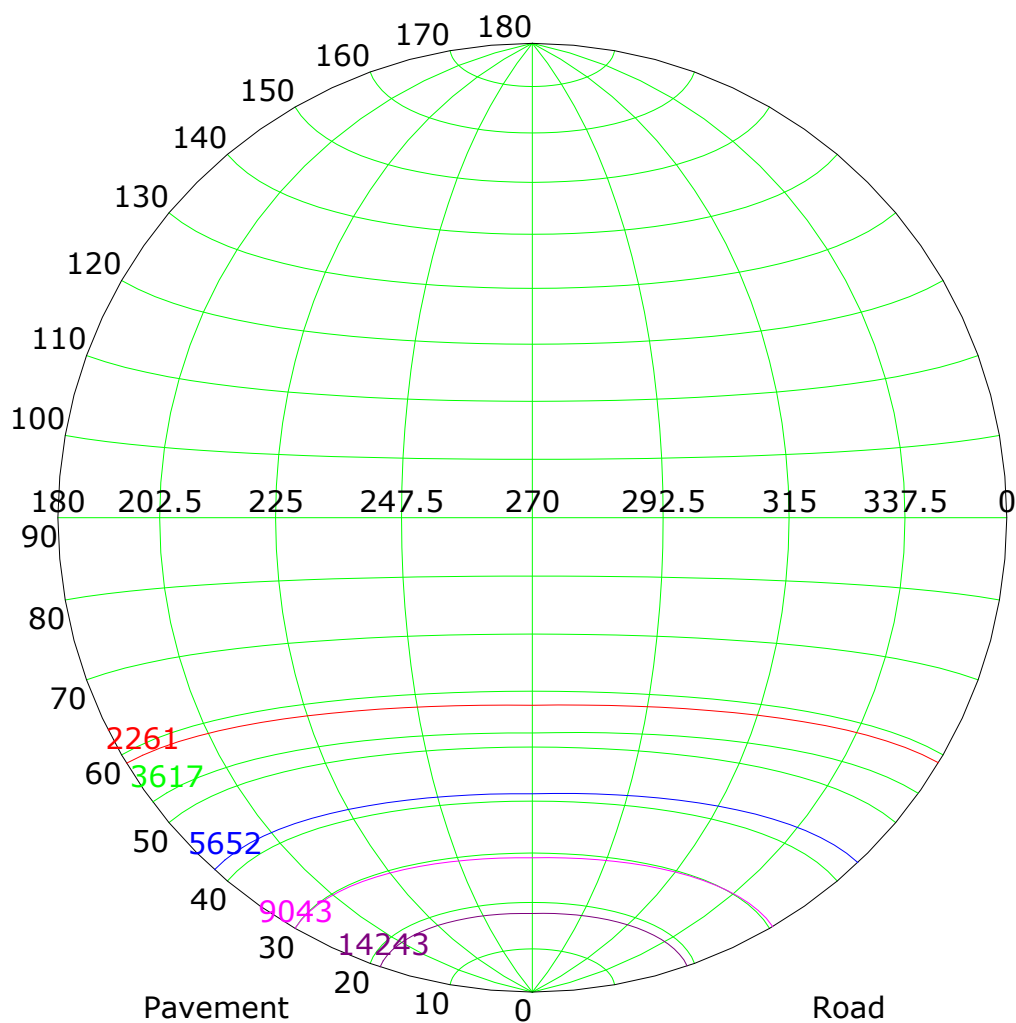


Imax (100%): 22608 cd

(10%): 2261 cd	(16%): 3617 cd
(25%): 5652 cd	(40%): 9043 cd
(63%): 14243 cd	(100%): 22608 cd

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

IsoLux Plot

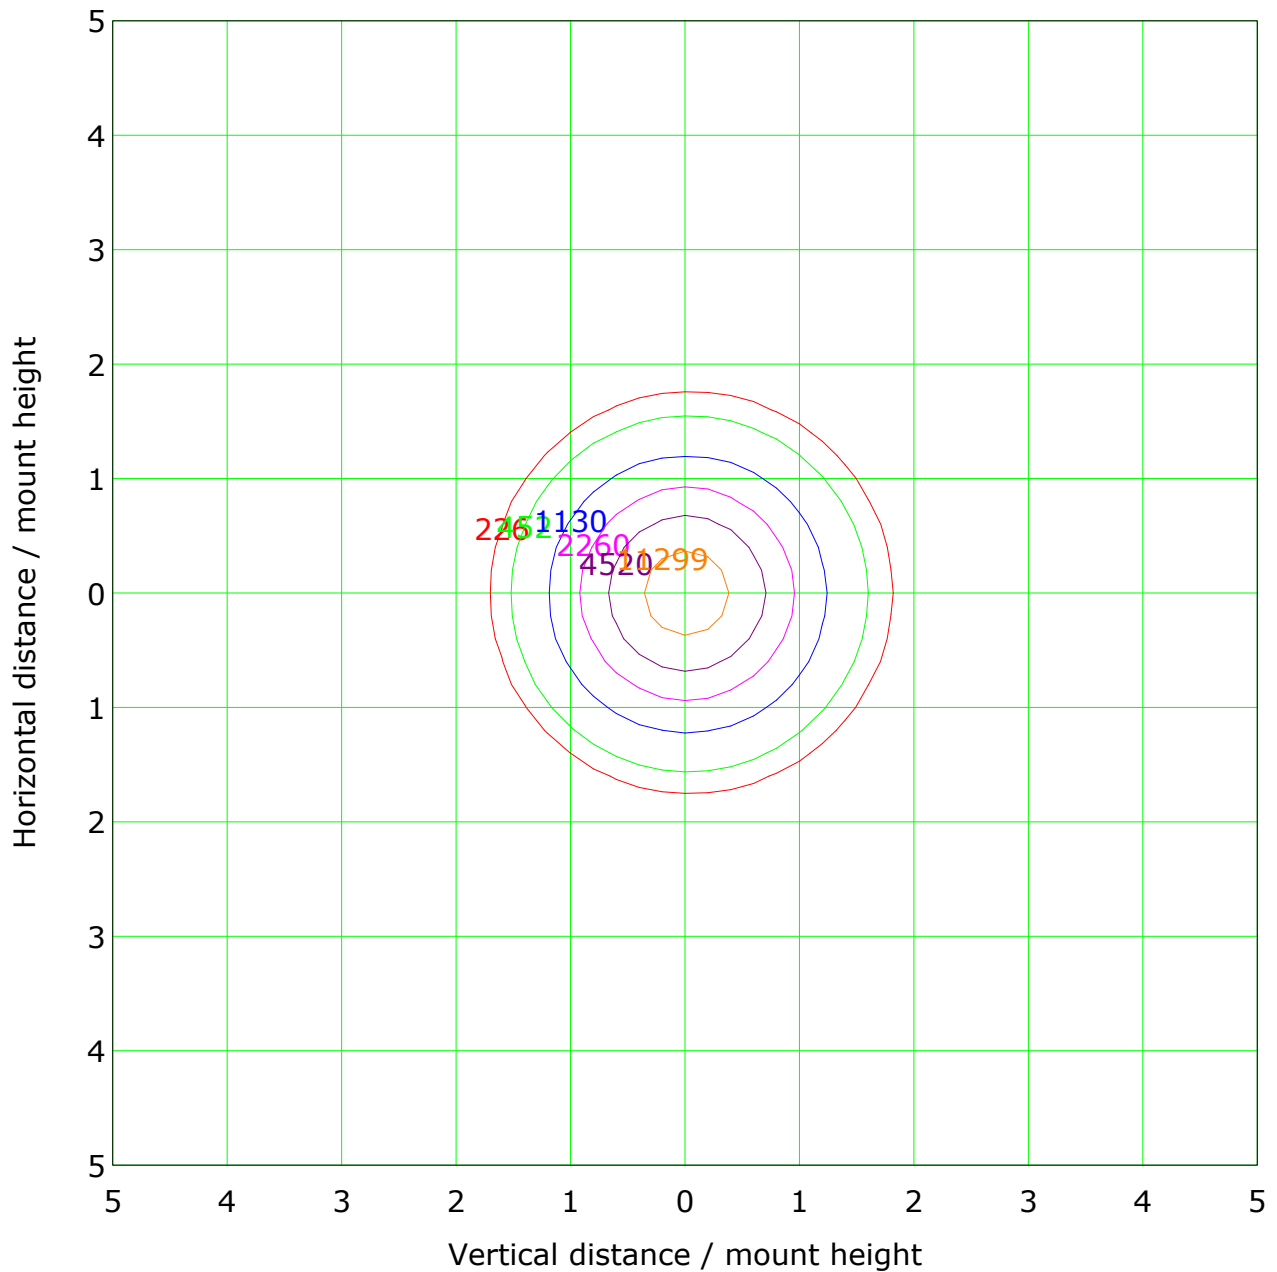

Mounting Height: 1.0m Max Lux(100%): 22598.1 lx


(1%): 226.0 lx	(2%): 452.0 lx
(5%): 1129.9 lx	(10%): 2259.8 lx
(20%): 4519.6 lx	(50%): 11299.1 lx
(100%): 22598.1 lx	

C Plane (°): 0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Roadway CU Curve

Efficiency(%)


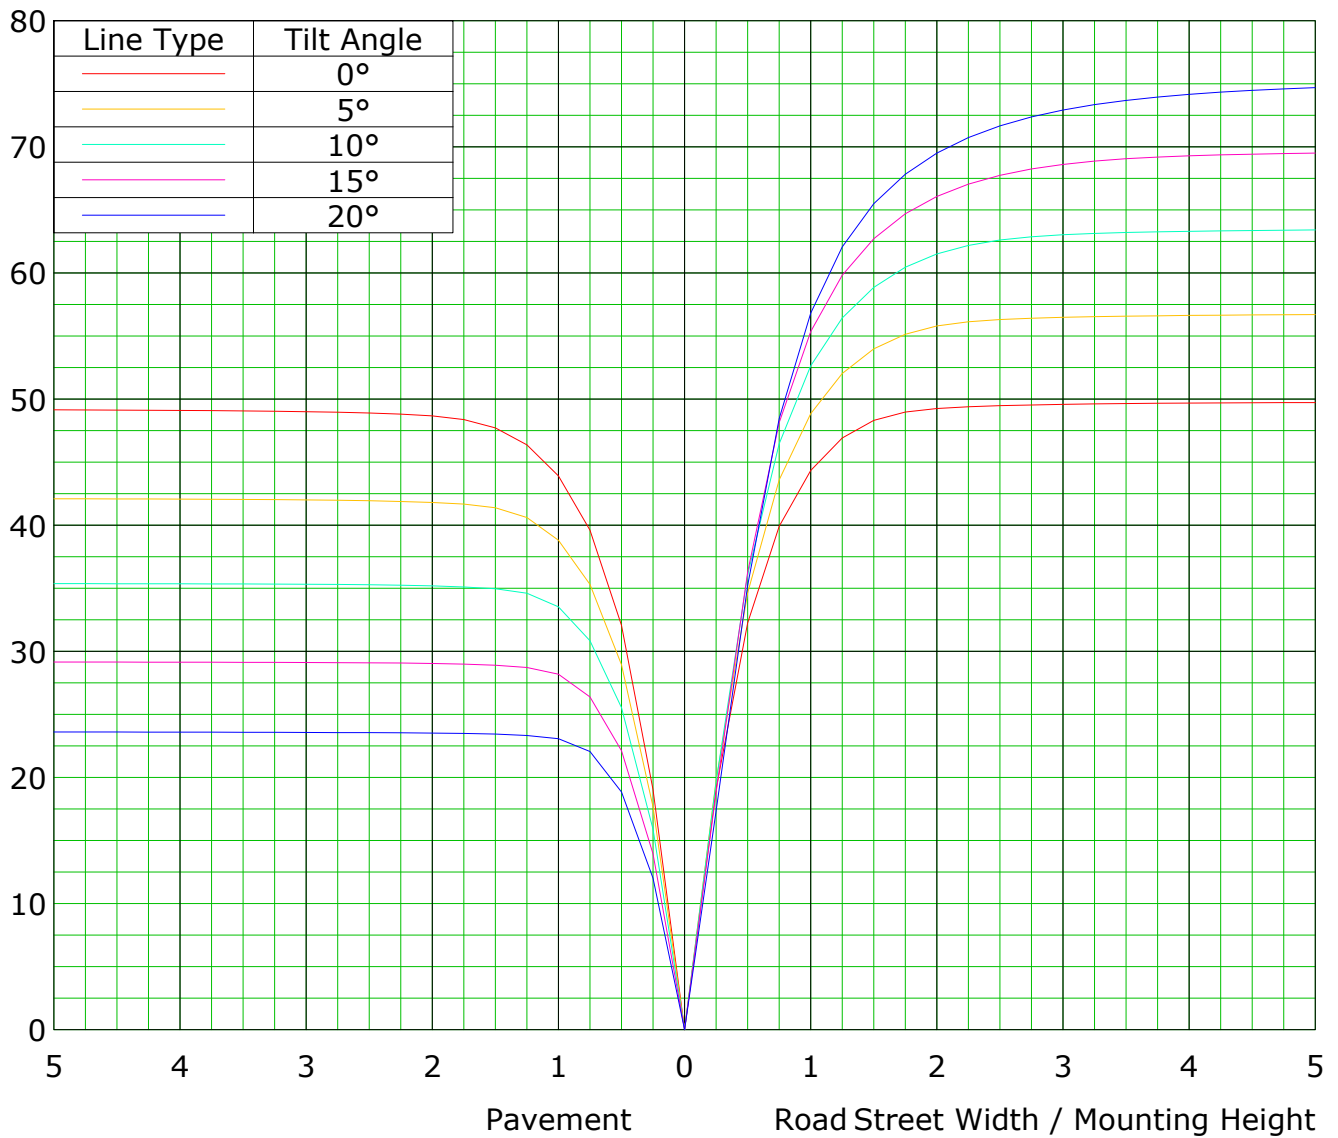


C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

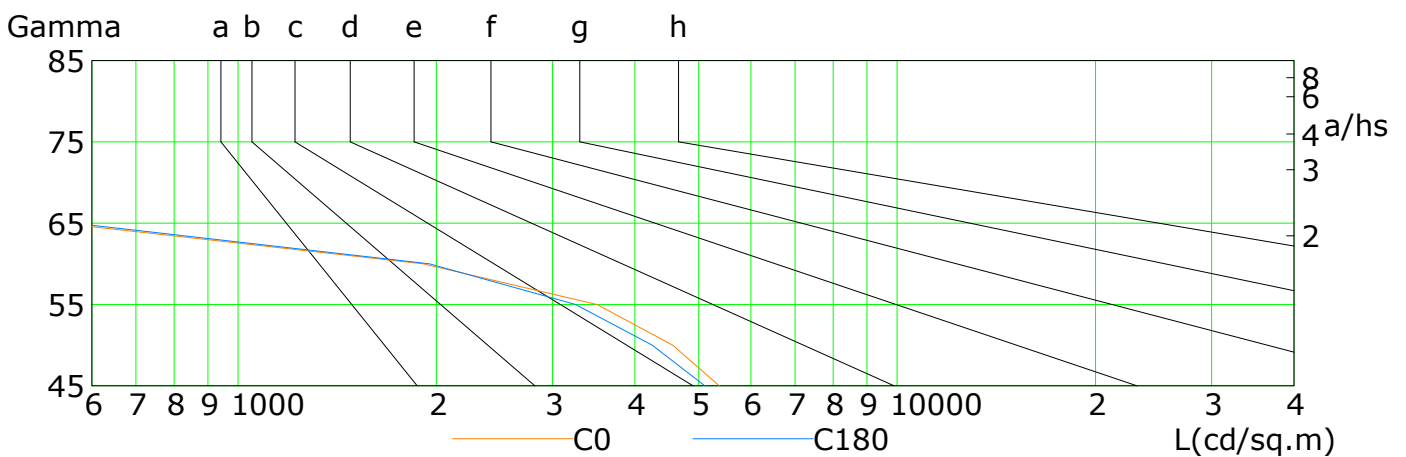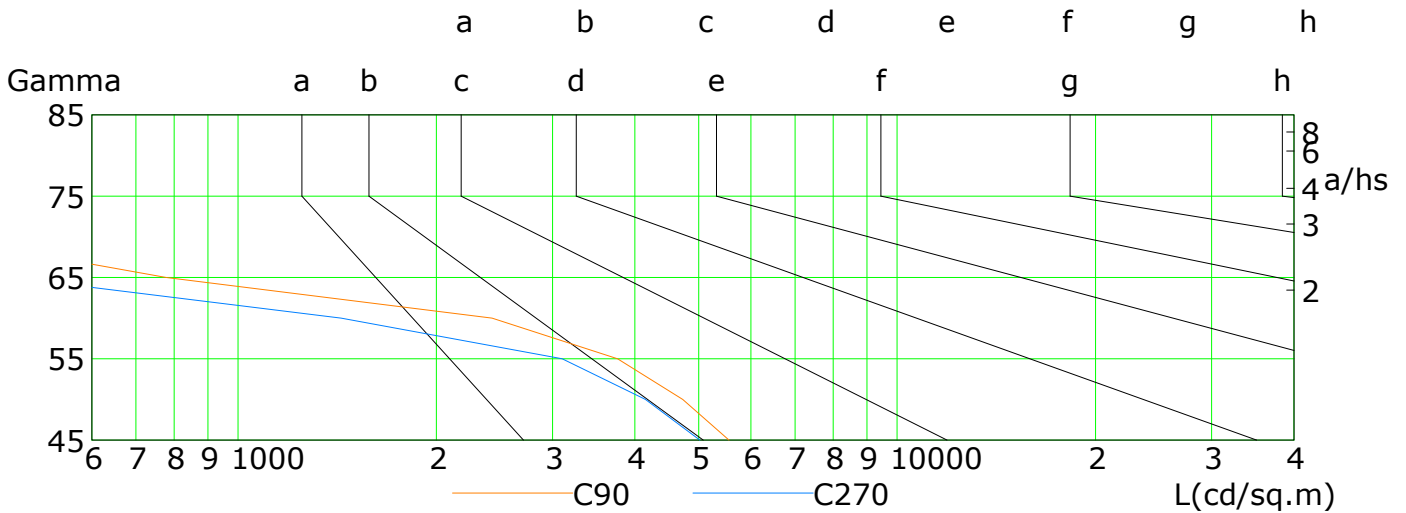


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	5371	4564	3503	1908	540	299	195	100	47
C90	5557	4728	3766	2429	778	352	231	129	55
C180	5108	4250	3251	1952	563	295	195	107	46
C270	5019	4150	3103	1433	455	276	180	90	42

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C


Illuminance at a Distance

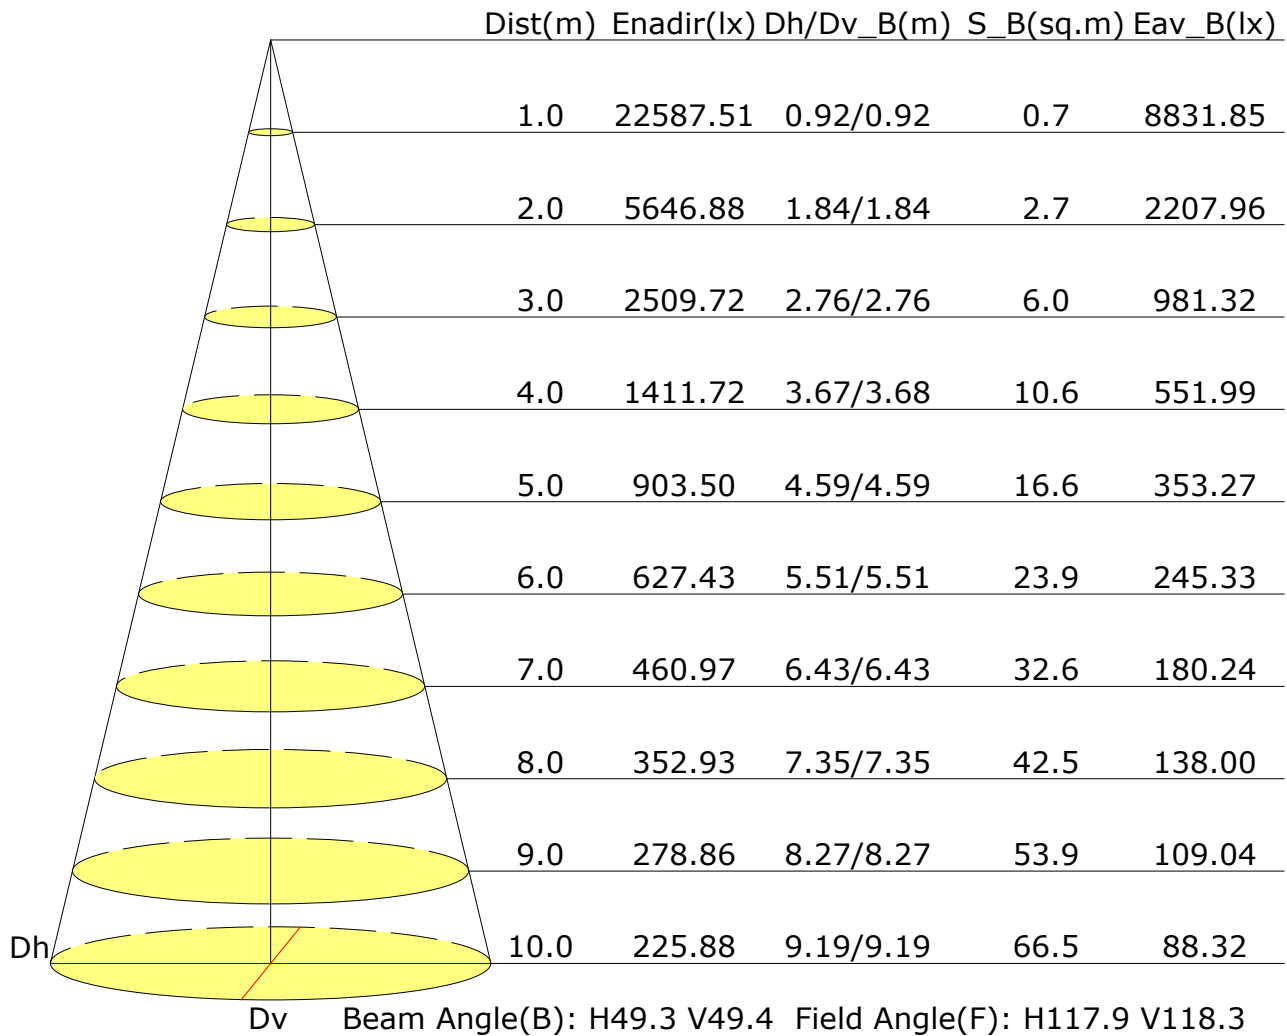

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Vertical IsoLux Plot

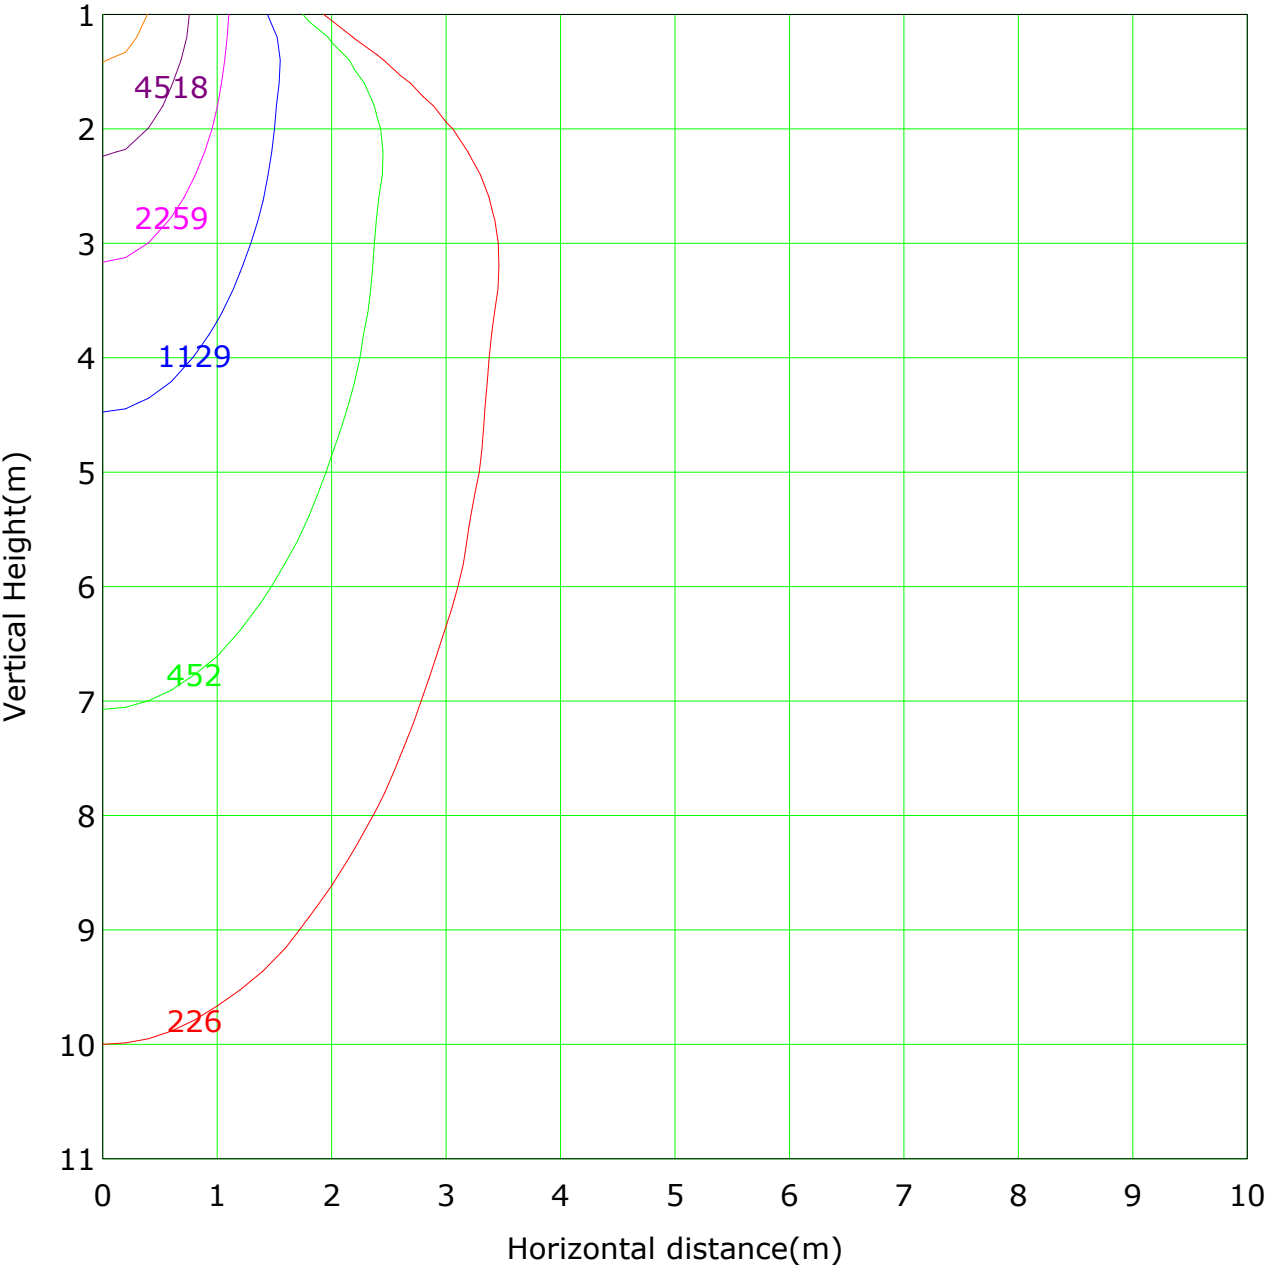

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 22587.5 lx
— (1%): 225.9 lx — (2%): 451.8 lx
— (5%):1129.4 lx — (10%):2258.8 lx
— (20%):4517.5 lx — (50%):11293.8 lx
— (100%):22587.5 lx

C Plane (°):0.0-360.0: 90.0
Test Lab:BTL
Test Type: TYPE C
Temperature:
Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: C

Area Flux Table

Unit: lm

-90	0.1	0.3	0.5	0.7	0.9	1.1	1.3	1.5	1.5	1.5	1.5	1.3	1.1	0.9	0.7	0.5	0.3	0.1	16.0	0.0
-80	0.1	0.3	0.7	1.4	2.4	3.4	4.4	5.1	5.5	5.5	5.1	4.4	3.4	2.3	1.4	0.7	0.3	0.1	46.5	0.0
-70	0.1	0.5	1.4	3.0	5.1	7.6	10.9	14.8	17.2	17.1	14.6	10.8	7.6	5.1	3.0	1.4	0.4	0.1	120.8	0.0
-60	0.1	0.7	2.3	4.9	11.0	29.2	55.7	77.7	89.1	89.6	78.7	56.3	28.6	10.6	4.9	2.3	0.7	0.1	542.5	354.4
-50	0.1	1.0	3.1	9.3	37.8	79.7	113.7	138.0	150.8	151.4	139.8	116.7	82.7	37.8	8.9	3.2	0.9	0.1	1075.1	999.3
-40	0.1	1.2	4.2	22.8	69.8	114.0	154.2	192.1	216.2	216.7	193.4	156.6	117.9	73.3	22.2	4.2	1.2	0.1	1559.9	507.8
-30	0.2	1.4	5.9	39.1	90.0	140.2	203.5	271.7	316.9	317.6	273.5	205.9	143.5	94.7	40.1	5.7	1.4	0.2	2151.2	110.8
-20	0.2	1.5	8.4	50.2	102.7	165.4	258.5	371.3	464.0	465.1	374.2	261.8	168.6	107.6	52.9	7.9	1.5	0.2	2862.2	828.1
-10	0.2	1.6	10.3	55.6	109.5	182.4	299.0	460.9	612.4	613.3	464.8	303.5	186.2	114.5	59.3	9.7	1.6	0.2	3485.0	454.1
0	0.2	1.6	10.5	56.1	110.2	184.2	302.9	470.1	627.5	628.4	474.0	307.3	188.0	115.2	59.8	9.8	1.6	0.2	3547.3	517.1
10	0.2	1.6	8.9	51.7	104.7	170.0	268.1	391.4	501.3	502.3	394.3	271.3	173.2	109.5	54.4	8.3	1.6	0.2	3012.2	978.9
20	0.2	1.4	6.3	41.8	93.1	145.9	215.1	291.8	348.3	349.0	293.6	217.5	149.1	97.9	42.7	6.1	1.4	0.2	2301.2	262.7
30	0.1	1.2	4.4	26.1	74.7	120.0	164.3	209.1	240.2	240.7	210.5	166.7	124.0	78.2	25.5	4.4	1.2	0.1	1691.5	643.0
40	0.1	1.0	3.3	11.0	45.1	88.4	123.8	150.6	166.9	167.5	152.5	126.8	91.4	45.1	10.6	3.3	1.0	0.1	1188.5	119.2
50	0.1	0.7	2.4	5.3	14.0	39.3	71.3	95.9	109.6	110.1	96.9	71.8	38.8	13.6	5.4	2.4	0.7	0.1	678.5	537.8
60	0.1	0.5	1.6	3.3	5.7	9.0	15.1	23.5	29.9	29.8	23.3	15.0	9.0	5.7	3.3	1.5	0.5	0.1	176.9	0.0
70	0.1	0.3	0.8	1.7	2.8	4.1	5.3	6.3	6.9	6.9	6.3	5.3	4.0	2.7	1.6	0.8	0.4	0.1	56.3	0.0
80	0.1	0.3	0.5	0.7	1.0	1.3	1.6	1.9	2.0	2.0	1.8	1.6	1.3	1.0	0.8	0.5	0.3	0.1	19.0	0.0
90	2.4	17.3	75.6	384.8	880.4	1485.2	2268.7	3173.6	3906.2	3914.3	3198.2	2300.5	1518.0	915.7	397.4	72.6	17.0	2.4	24532	
Flux(T)	0.0	0.0	0.0	259.4	793.2	1403.7	2191.0	3097.7	3831.2	3840.2	3123.2	2225.0	1438.5	831.6	278.5	0.0	0.0	0.0		23313
Flux(E)	-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(T)Flux(E)


Horizontal plane

C Plane (°):0.0-360.0: 90.0
Test Lab:BTL
Test Type: TYPE C
Temperature:
Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: C

The Average Illuminance Effective Figure

Flux Out: 18582.23lm

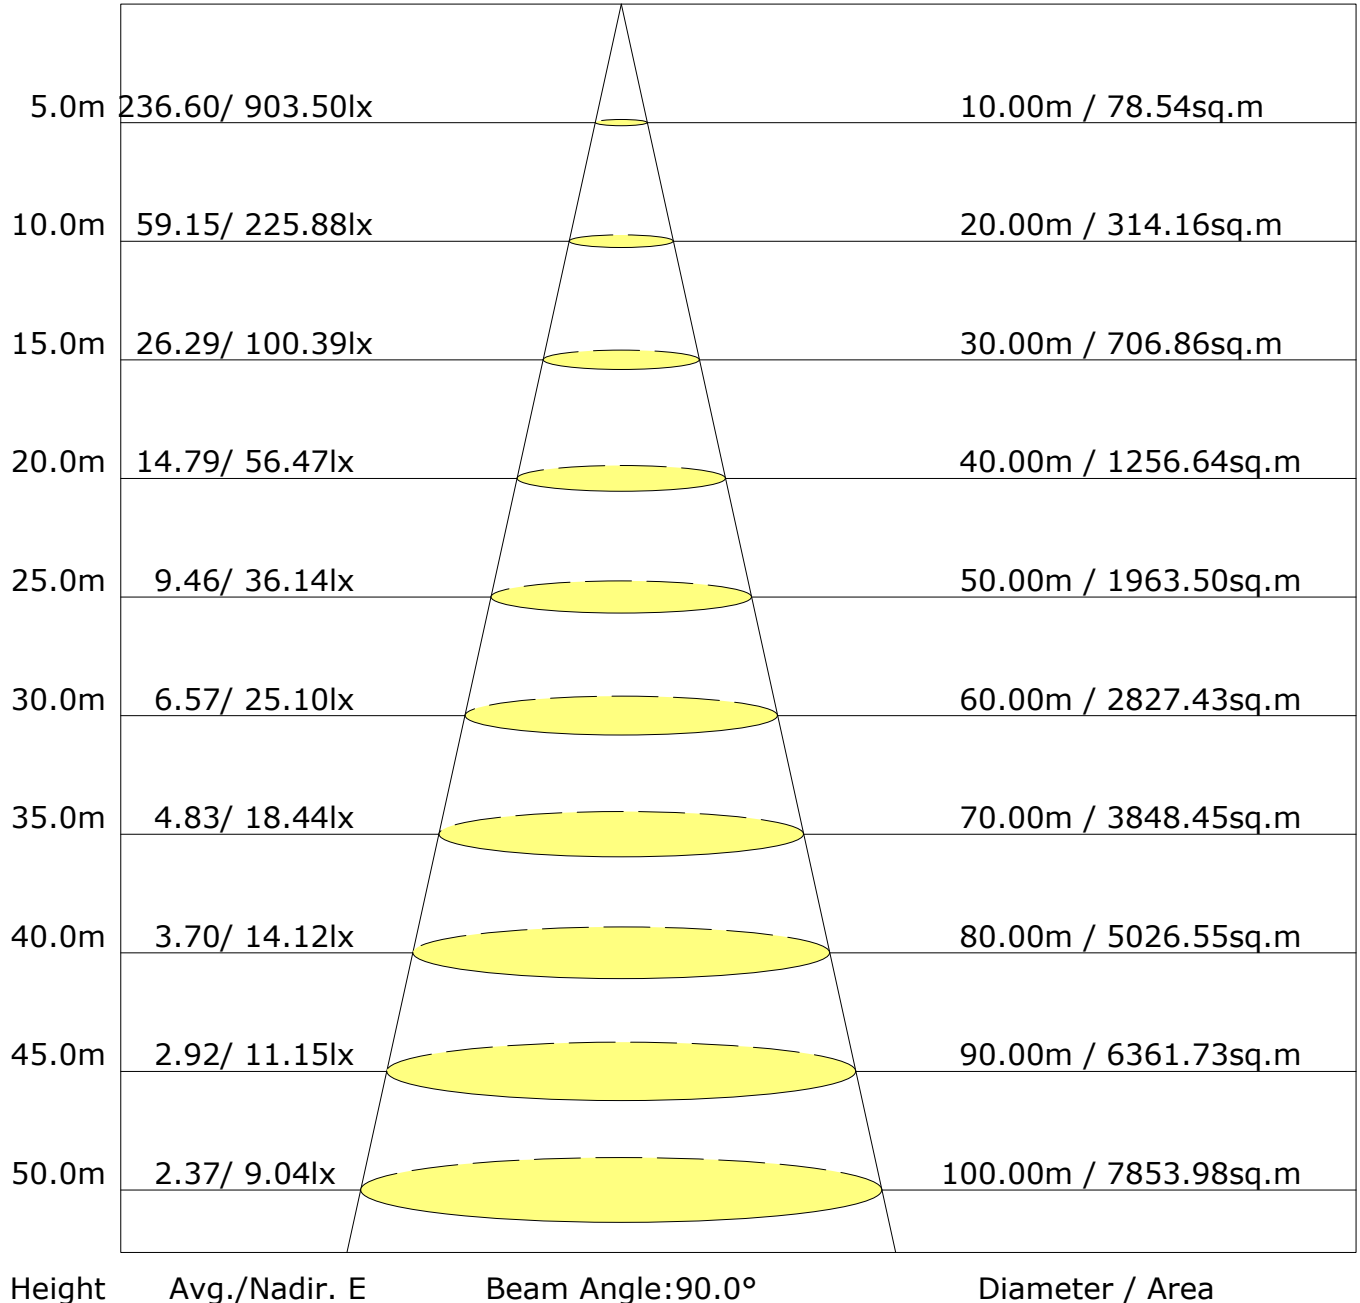

C Plane (°): 0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C


UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S=1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S=2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 24581lm ($8\log(F/F_0) = 11.1$).

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

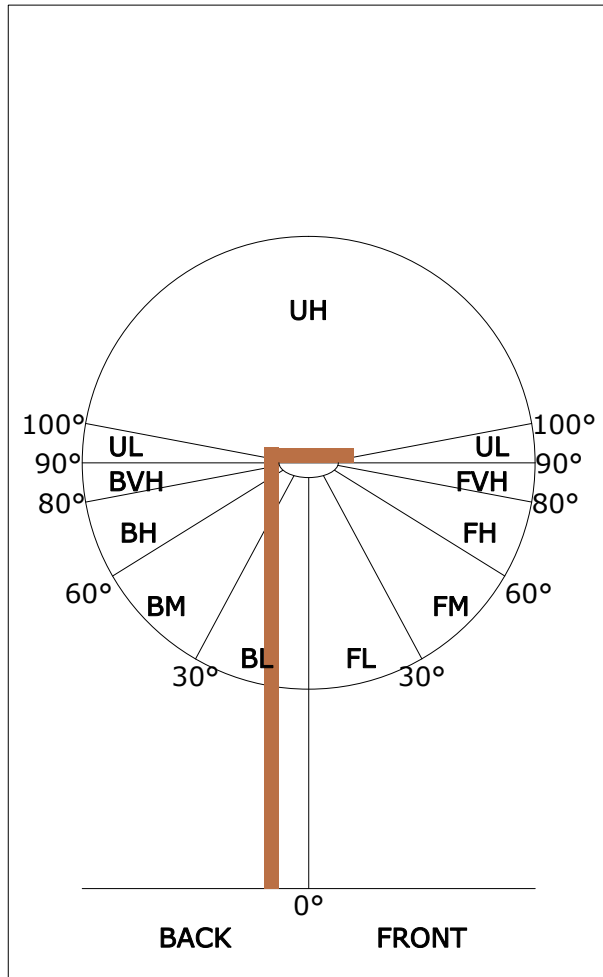FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


ZONE	LUMENS	% LAMP LUMENS
FORWARD LIGHT	12340	50.2
FL (0°-30°)	5887	24.0
FM (30°-60°)	5940	24.2
FH (60°-80°)	482	2.0
FVH (80°-90°)	31	0.1
BACK LIGHT	12197	49.6
BL (0°-30°)	5854	23.8
BM (30°-60°)	5817	23.7
BH (60°-80°)	494	2.0
BVH (80°-90°)	31	0.1
UP LIGHT	44	0.2
UL (90°-100°)	42	0.2
UH (100°-180°)	2	0.0
TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B5 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B5 U2 G1

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

LCS Graph

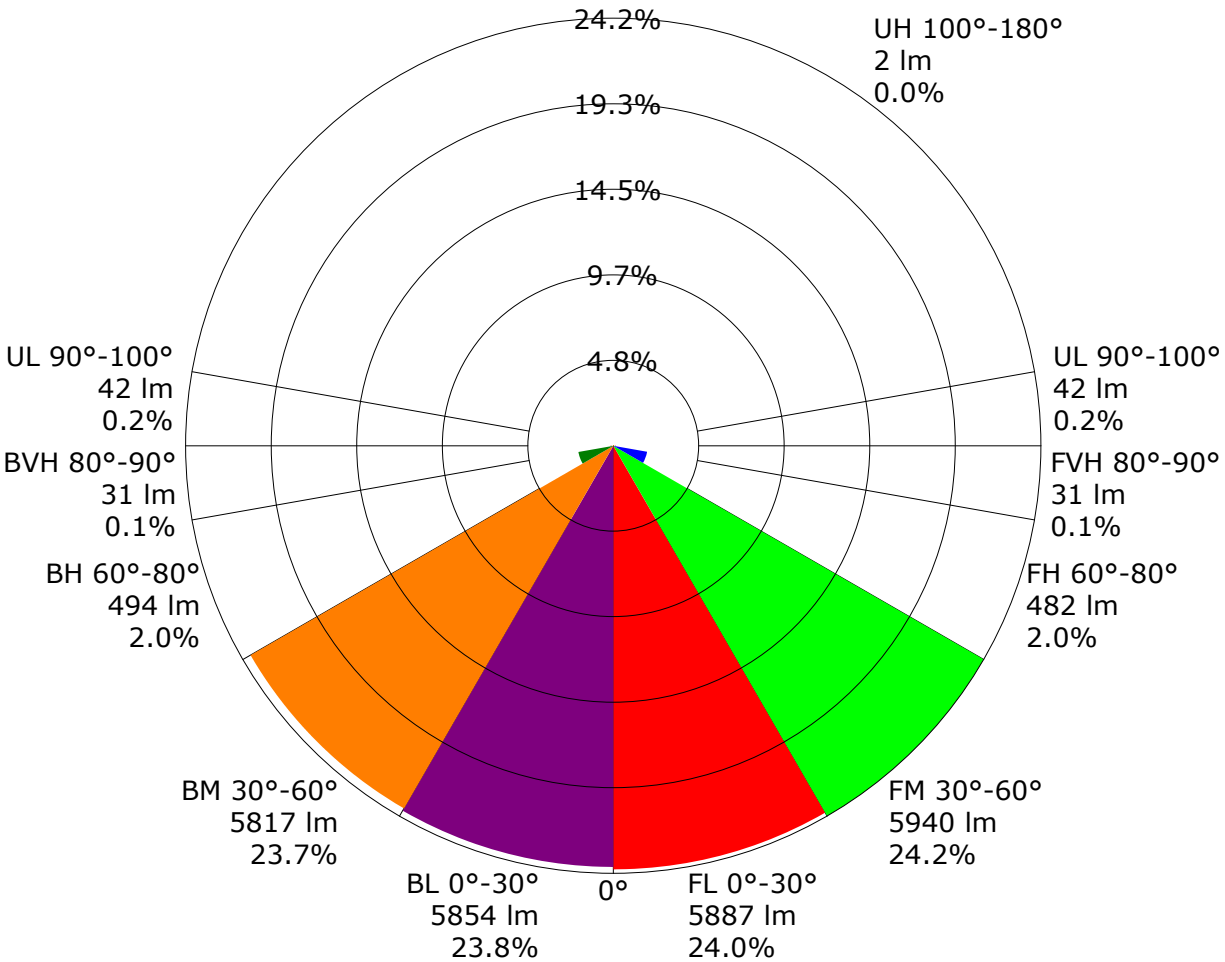

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.69	0.79	0.85	0.90	0.96	0.99	1.02	1.05	1.08	
	0.30		0.62	0.72	0.79	0.84	0.91	0.95	0.98	1.02	1.05	
	0.20		0.58	0.68	0.75	0.80	0.87	0.92	0.95	1.00	1.03	
0.50	0.50	0.20	0.67	0.77	0.83	0.87	0.93	0.96	0.99	1.02	1.04	
	0.30		0.62	0.71	0.78	0.82	0.89	0.93	0.95	0.99	1.01	
	0.20		0.57	0.67	0.74	0.79	0.85	0.90	0.93	0.97	1.00	
0.30	0.50	0.20	0.66	0.75	0.81	0.85	0.90	0.93	0.95	0.98	1.00	
	0.30		0.61	0.70	0.76	0.81	0.87	0.90	0.93	0.96	0.98	
	0.20		0.57	0.67	0.73	0.78	0.84	0.88	0.91	0.94	0.97	
0.00	0.00	0.00	0.55	0.64	0.70	0.75	0.81	0.84	0.87	0.90	0.92	
Rating:286W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.82	0.65	0.54	0.47	0.36	0.30	0.25	0.19	0.16	
	0.30		0.68	0.56	0.47	0.41	0.33	0.27	0.23	0.18	0.15	
	0.20		0.58	0.49	0.42	0.37	0.30	0.25	0.22	0.17	0.14	
0.50	0.50	0.20	0.78	0.62	0.52	0.44	0.34	0.32	0.24	0.18	0.15	
	0.30		0.66	0.54	0.46	0.40	0.31	0.26	0.22	0.17	0.14	
	0.20		0.58	0.48	0.41	0.36	0.29	0.24	0.21	0.16	0.13	
0.30	0.50	0.20	0.76	0.60	0.49	0.42	0.32	0.26	0.22	0.17	0.14	
	0.30		0.65	0.53	0.44	0.38	0.30	0.25	0.21	0.16	0.13	
	0.20		0.57	0.47	0.40	0.35	0.28	0.23	0.20	0.15	0.13	
0.00	0.00	0.00	0.45	0.36	0.30	0.25	0.20	0.16	0.14	0.10	0.08	
Rating:286W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.15	0.16	0.17	0.18	0.19	0.20	0.20	0.21	0.21	
	0.30		0.09	0.11	0.13	0.14	0.15	0.17	0.17	0.19	0.20	
	0.20		0.05	0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.18	
0.50	0.50	0.20	0.14	0.16	0.17	0.17	0.18	0.19	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.05	0.07	0.09	0.10	0.12	0.13	0.15	0.16	0.17	
0.30	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.18	0.19	0.19	0.20	
	0.30		0.09	0.11	0.12	0.13	0.14	0.16	0.16	0.17	0.18	
	0.20		0.05	0.07	0.09	0.10	0.12	0.13	0.14	0.16	0.17	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
Rating:286W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	22562.9	21.6	21.6	0.09	0.09
1.0-2.0	22495.5	64.6	86.2	0.26	0.35
2.0-3.0	22347.1	106.9	193.1	0.43	0.79
3.0-4.0	22128.4	148.1	341.2	0.60	1.39
4.0-5.0	21853.6	188.0	529.2	0.76	2.15
5.0-6.0	21506.8	226.0	755.3	0.92	3.07
6.0-7.0	21124.8	262.2	1017.5	1.07	4.14
7.0-8.0	20711.6	296.5	1314.0	1.21	5.35
8.0-9.0	20254.8	328.3	1642.3	1.34	6.68
9.0-10.0	19757.7	357.6	1999.9	1.45	8.14
10.0-11.0	19186.7	383.4	2383.3	1.56	9.70
11.0-12.0	18590.8	406.4	2789.8	1.65	11.35
12.0-13.0	18016.5	427.6	3217.4	1.74	13.09
13.0-14.0	17415.2	445.8	3663.2	1.81	14.90
14.0-15.0	16819.5	461.8	4125.0	1.88	16.78
15.0-16.0	16230.8	475.7	4600.7	1.94	18.72
16.0-17.0	15637.4	487.0	5087.7	1.98	20.70
17.0-18.0	15070.9	497.0	5584.7	2.02	22.72
18.0-19.0	14477.4	503.8	6088.4	2.05	24.77
19.0-20.0	13885.6	508.3	6596.7	2.07	26.84
20.0-21.0	13339.3	512.3	7109.0	2.08	28.92
21.0-22.0	12802.4	514.5	7623.5	2.09	31.01
22.0-23.0	12298.2	516.1	8139.6	2.10	33.11
23.0-24.0	11826.7	517.1	8656.8	2.10	35.22
24.0-25.0	11377.2	517.4	9174.2	2.10	37.32
25.0-26.0	10971.9	518.0	9692.2	2.11	39.43
26.0-27.0	10564.0	516.9	10209.1	2.10	41.53
27.0-28.0	10157.0	514.3	10723.4	2.09	43.63
28.0-29.0	9772.4	511.3	11234.7	2.08	45.71
29.0-30.0	9375.8	506.3	11741.0	2.06	47.77
30.0-31.0	8993.0	500.5	12241.5	2.04	49.80
31.0-32.0	8641.7	495.2	12736.7	2.01	51.82
32.0-33.0	8319.7	490.2	13226.9	1.99	53.81
33.0-34.0	8025.6	485.8	13712.6	1.98	55.79
34.0-35.0	7715.2	479.2	14191.9	1.95	57.74
35.0-36.0	7401.6	471.3	14663.2	1.92	59.65

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	7116.0	464.2	15127.4	1.89	61.54
37.0-38.0	6835.7	456.3	15583.7	1.86	63.40
38.0-39.0	6567.6	448.3	16032.0	1.82	65.22
39.0-40.0	6318.1	440.7	16472.7	1.79	67.02
40.0-41.0	6086.0	433.4	16906.2	1.76	68.78
41.0-42.0	5883.0	427.5	17333.7	1.74	70.52
42.0-43.0	5690.5	421.6	17755.2	1.72	72.23
43.0-44.0	5511.6	416.0	18171.3	1.69	73.93
44.0-45.0	5346.5	410.9	18582.2	1.67	75.60
45.0-46.0	5180.4	405.2	18987.4	1.65	77.25
46.0-47.0	5017.9	399.1	19386.6	1.62	78.87
47.0-48.0	4852.1	392.3	19778.9	1.60	80.47
48.0-49.0	4681.3	384.5	20163.3	1.56	82.03
49.0-50.0	4510.0	376.1	20539.4	1.53	83.56
50.0-51.0	4324.9	366.0	20905.4	1.49	85.05
51.0-52.0	4136.4	355.0	21260.4	1.44	86.49
52.0-53.0	3936.7	342.5	21602.9	1.39	87.89
53.0-54.0	3724.7	328.3	21931.2	1.34	89.22
54.0-55.0	3513.9	313.7	22244.9	1.28	90.50
55.0-56.0	3277.6	296.2	22541.1	1.21	91.70
56.0-57.0	3024.8	276.6	22817.7	1.13	92.83
57.0-58.0	2752.2	254.5	23072.3	1.04	93.86
58.0-59.0	2433.7	227.6	23299.8	0.93	94.79
59.0-60.0	2096.9	198.1	23497.9	0.81	95.60
60.0-61.0	1742.2	166.3	23664.2	0.68	96.27
61.0-62.0	1392.2	134.2	23798.4	0.55	96.82
62.0-63.0	1095.7	106.6	23905.0	0.43	97.25
63.0-64.0	848.1	83.2	23988.2	0.34	97.59
64.0-65.0	659.8	65.3	24053.5	0.27	97.86
65.0-66.0	536.6	53.5	24107.1	0.22	98.07
66.0-67.0	454.7	45.7	24152.8	0.19	98.26
67.0-68.0	396.0	40.1	24192.9	0.16	98.42
68.0-69.0	352.9	36.0	24228.9	0.15	98.57
69.0-70.0	319.8	32.8	24261.7	0.13	98.70
70.0-71.0	293.5	30.3	24292.1	0.12	98.83
71.0-72.0	270.3	28.1	24320.2	0.11	98.94

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	249.6	26.1	24346.3	0.11	99.05
73.0-74.0	230.2	24.2	24370.5	0.10	99.15
74.0-75.0	210.5	22.2	24392.7	0.09	99.24
75.0-76.0	190.9	20.3	24413.0	0.08	99.32
76.0-77.0	171.2	18.3	24431.3	0.07	99.39
77.0-78.0	151.5	16.2	24447.5	0.07	99.46
78.0-79.0	133.4	14.3	24461.8	0.06	99.52
79.0-80.0	115.5	12.5	24474.3	0.05	99.57
80.0-81.0	98.5	10.7	24484.9	0.04	99.61
81.0-82.0	83.3	9.0	24494.0	0.04	99.65
82.0-83.0	69.8	7.6	24501.6	0.03	99.68
83.0-84.0	58.9	6.4	24508.0	0.03	99.70
84.0-85.0	50.8	5.5	24513.5	0.02	99.73
85.0-86.0	45.7	5.0	24518.5	0.02	99.75
86.0-87.0	42.6	4.7	24523.2	0.02	99.77
87.0-88.0	40.7	4.5	24527.6	0.02	99.78
88.0-89.0	39.5	4.3	24532.0	0.02	99.80
89.0-90.0	38.7	4.2	24536.2	0.02	99.82
90.0-91.0	38.3	4.2	24540.4	0.02	99.84
91.0-92.0	38.0	4.2	24544.6	0.02	99.85
92.0-93.0	37.9	4.2	24548.7	0.02	99.87
93.0-94.0	38.1	4.2	24552.9	0.02	99.89
94.0-95.0	38.3	4.2	24557.1	0.02	99.90
95.0-96.0	38.6	4.2	24561.3	0.02	99.92
96.0-97.0	39.0	4.3	24565.5	0.02	99.94
97.0-98.0	39.4	4.3	24569.8	0.02	99.96
98.0-99.0	39.6	4.3	24574.1	0.02	99.97
99.0-100.0	39.9	4.3	24578.4	0.02	99.99
100.0-101.0	20.2	2.2	24580.6	0.01	100.00
101.0-102.0	0.0	0.0	24580.6	0.00	100.00
102.0-103.0	0.0	0.0	24580.6	0.00	100.00
103.0-104.0	0.0	0.0	24580.6	0.00	100.00
104.0-105.0	0.0	0.0	24580.6	0.00	100.00
105.0-106.0	0.0	0.0	24580.6	0.00	100.00
106.0-107.0	0.0	0.0	24580.6	0.00	100.00
107.0-108.0	0.0	0.0	24580.6	0.00	100.00

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	24580.6	0.00	100.00
109.0-110.0	0.0	0.0	24580.6	0.00	100.00
110.0-111.0	0.0	0.0	24580.6	0.00	100.00
111.0-112.0	0.0	0.0	24580.6	0.00	100.00
112.0-113.0	0.0	0.0	24580.6	0.00	100.00
113.0-114.0	0.0	0.0	24580.6	0.00	100.00
114.0-115.0	0.0	0.0	24580.6	0.00	100.00
115.0-116.0	0.0	0.0	24580.6	0.00	100.00
116.0-117.0	0.0	0.0	24580.6	0.00	100.00
117.0-118.0	0.0	0.0	24580.6	0.00	100.00
118.0-119.0	0.0	0.0	24580.6	0.00	100.00
119.0-120.0	0.0	0.0	24580.6	0.00	100.00
120.0-121.0	0.0	0.0	24580.6	0.00	100.00
121.0-122.0	0.0	0.0	24580.6	0.00	100.00
122.0-123.0	0.0	0.0	24580.6	0.00	100.00
123.0-124.0	0.0	0.0	24580.6	0.00	100.00
124.0-125.0	0.0	0.0	24580.6	0.00	100.00
125.0-126.0	0.0	0.0	24580.6	0.00	100.00
126.0-127.0	0.0	0.0	24580.6	0.00	100.00
127.0-128.0	0.0	0.0	24580.6	0.00	100.00
128.0-129.0	0.0	0.0	24580.6	0.00	100.00
129.0-130.0	0.0	0.0	24580.6	0.00	100.00
130.0-131.0	0.0	0.0	24580.6	0.00	100.00
131.0-132.0	0.0	0.0	24580.6	0.00	100.00
132.0-133.0	0.0	0.0	24580.6	0.00	100.00
133.0-134.0	0.0	0.0	24580.6	0.00	100.00
134.0-135.0	0.0	0.0	24580.6	0.00	100.00
135.0-136.0	0.0	0.0	24580.6	0.00	100.00
136.0-137.0	0.0	0.0	24580.6	0.00	100.00
137.0-138.0	0.0	0.0	24580.6	0.00	100.00
138.0-139.0	0.0	0.0	24580.6	0.00	100.00
139.0-140.0	0.0	0.0	24580.6	0.00	100.00
140.0-141.0	0.0	0.0	24580.6	0.00	100.00
141.0-142.0	0.0	0.0	24580.6	0.00	100.00
142.0-143.0	0.0	0.0	24580.6	0.00	100.00
143.0-144.0	0.0	0.0	24580.6	0.00	100.00

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	24580.6	0.00	100.00
145.0-146.0	0.0	0.0	24580.6	0.00	100.00
146.0-147.0	0.0	0.0	24580.6	0.00	100.00
147.0-148.0	0.0	0.0	24580.6	0.00	100.00
148.0-149.0	0.0	0.0	24580.6	0.00	100.00
149.0-150.0	0.0	0.0	24580.6	0.00	100.00
150.0-151.0	0.0	0.0	24580.6	0.00	100.00
151.0-152.0	0.0	0.0	24580.6	0.00	100.00
152.0-153.0	0.0	0.0	24580.6	0.00	100.00
153.0-154.0	0.0	0.0	24580.6	0.00	100.00
154.0-155.0	0.0	0.0	24580.6	0.00	100.00
155.0-156.0	0.0	0.0	24580.6	0.00	100.00
156.0-157.0	0.0	0.0	24580.6	0.00	100.00
157.0-158.0	0.0	0.0	24580.6	0.00	100.00
158.0-159.0	0.0	0.0	24580.6	0.00	100.00
159.0-160.0	0.0	0.0	24580.6	0.00	100.00
160.0-161.0	0.0	0.0	24580.6	0.00	100.00
161.0-162.0	0.0	0.0	24580.6	0.00	100.00
162.0-163.0	0.0	0.0	24580.6	0.00	100.00
163.0-164.0	0.0	0.0	24580.6	0.00	100.00
164.0-165.0	0.0	0.0	24580.6	0.00	100.00
165.0-166.0	0.0	0.0	24580.6	0.00	100.00
166.0-167.0	0.0	0.0	24580.6	0.00	100.00
167.0-168.0	0.0	0.0	24580.6	0.00	100.00
168.0-169.0	0.0	0.0	24580.6	0.00	100.00
169.0-170.0	0.0	0.0	24580.6	0.00	100.00
170.0-171.0	0.0	0.0	24580.6	0.00	100.00
171.0-172.0	0.0	0.0	24580.6	0.00	100.00
172.0-173.0	0.0	0.0	24580.6	0.00	100.00
173.0-174.0	0.0	0.0	24580.6	0.00	100.00
174.0-175.0	0.0	0.0	24580.6	0.00	100.00
175.0-176.0	0.0	0.0	24580.6	0.00	100.00
176.0-177.0	0.0	0.0	24580.6	0.00	100.00
177.0-178.0	0.0	0.0	24580.6	0.00	100.00
178.0-179.0	0.0	0.0	24580.6	0.00	100.00
179.0-180.0	0.0	0.0	24580.6	0.00	100.00

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	22587.5	22572.8	22587.5	22572.8	22587.5					
G1.0	22558.7	22608.5	22544.0	22471.7	22558.7					
G2.0	22461.8	22579.1	22430.3	22310.3	22461.8					
G3.0	22264.7	22466.5	22224.4	22039.9	22264.7					
G4.0	22013.7	22296.7	21976.0	21745.4	22013.7					
G5.0	21678.8	22054.6	21662.1	21401.1	21678.8					
G6.0	21282.7	21749.1	21245.5	20980.9	21282.7					
G7.0	20894.4	21427.3	20848.8	20570.0	20894.4					
G8.0	20460.0	21060.5	20390.8	20040.8	20460.0					
G9.0	20002.0	20668.5	19927.0	19489.0	20002.0					
G10.0	19461.7	20247.2	19378.9	18887.4	19461.7					
G11.0	18840.2	19700.7	18745.4	18232.3	18840.2					
G12.0	18262.2	19150.4	18181.0	17614.5	18262.2					
G13.0	17709.4	18599.7	17592.5	17021.9	17709.4					
G14.0	17105.2	17956.2	16950.6	16386.2	17105.2					
G15.0	16539.8	17394.4	16392.0	15831.3	16539.8					
G16.0	15964.9	16774.5	15766.3	15183.6	15964.9					
G17.0	15414.2	16181.3	15207.2	14607.2	15414.2					
G18.0	14875.5	15607.5	14669.5	14004.5	14875.5					
G19.0	14247.7	14943.1	14073.7	13397.7	14247.7					
G20.0	13712.7	14347.2	13509.3	12853.3	13712.7					
G21.0	13177.1	13797.0	12973.3	12345.0	13177.1					
G22.0	12643.6	13203.8	12425.7	11853.9	12643.6					
G23.0	12155.8	12713.3	11973.4	11415.8	12155.8					
G24.0	11675.2	12208.2	11484.5	10987.2	11675.2					
G25.0	11246.6	11753.3	11061.1	10601.5	11246.6					
G26.0	10858.3	11345.1	10672.3	10236.8	10858.3					
G27.0	10431.2	10908.6	10246.2	9813.4	10431.2					
G28.0	10039.2	10525.5	9876.8	9414.6	10039.2					
G29.0	9648.3	10150.9	9489.0	9034.7	9648.3					
G30.0	9193.5	9763.6	9045.2	8681.5	9193.5					
G31.0	8819.8	9392.1	8661.1	8387.5	8819.8					
G32.0	8467.7	9025.3	8294.8	8085.7	8467.7					
G33.0	8196.8	8710.8	7991.4	7785.4	8196.8					
G34.0	7902.3	8419.0	7695.8	7503.0	7902.3					
G35.0	7542.8	8090.9	7381.4	7186.5	7542.8					
G36.0	7223.7	7781.2	7089.5	6916.6	7223.7					

C Plane (°):0.0-360.0: 90.0

Test Lab: BTL

Test Type: TYPE C

Temperature:

Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	6954.3	7498.3	6820.7	6643.6	6954.3					
G38.0	6678.2	7185.9	6537.2	6367.4	6678.2					
G39.0	6448.1	6918.2	6281.5	6124.3	6448.1					
G40.0	6220.2	6620.0	6037.8	5894.7	6220.2					
G41.0	6014.2	6378.9	5827.7	5694.6	6014.2					
G42.0	5831.3	6153.1	5644.3	5520.1	5831.3					
G43.0	5655.3	5932.5	5447.8	5339.8	5655.3					
G44.0	5504.9	5739.6	5287.4	5185.7	5504.9					
G45.0	5370.7	5557.3	5107.7	5019.1	5370.7					
G46.0	5202.5	5384.3	4946.3	4855.6	5202.5					
G47.0	5053.7	5220.3	4780.7	4699.4	5053.7					
G48.0	4898.6	5053.2	4601.5	4509.2	4898.6					
G49.0	4732.5	4889.7	4435.3	4330.5	4732.5					
G50.0	4564.3	4728.3	4249.8	4149.7	4564.3					
G51.0	4368.8	4534.9	4054.4	3949.0	4368.8					
G52.0	4192.2	4359.4	3871.0	3761.4	4192.2					
G53.0	3968.4	4149.2	3656.1	3535.6	3968.4					
G54.0	3743.6	3963.2	3455.9	3325.4	3743.6					
G55.0	3503.1	3765.6	3251.0	3103.3	3503.1					
G56.0	3235.3	3536.6	3010.5	2815.1	3235.3					
G57.0	2985.9	3310.3	2772.1	2532.6	2985.9					
G58.0	2647.4	3047.7	2527.4	2194.6	2647.4					
G59.0	2264.8	2748.0	2236.5	1803.2	2264.8					
G60.0	1908.5	2428.9	1952.0	1433.2	1908.5					
G61.0	1480.9	2067.8	1600.9	1065.3	1480.9					
G62.0	1140.3	1705.2	1286.5	790.8	1140.3					
G63.0	875.6	1366.7	978.3	622.5	875.6					
G64.0	668.1	1027.1	723.7	523.0	668.1					
G65.0	540.3	778.2	563.3	454.9	540.3					
G66.0	459.6	619.9	475.8	400.9	459.6					
G67.0	400.4	509.9	409.3	361.6	400.4					
G68.0	361.0	432.8	364.7	328.0	361.0					
G69.0	324.4	387.8	327.5	296.6	324.4					
G70.0	299.2	351.6	295.0	276.2	299.2					
G71.0	278.8	316.0	272.5	258.3	278.8					
G72.0	257.3	288.7	251.5	239.5	257.3					
G73.0	237.4	267.3	233.7	221.1	237.4					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	215.9	249.4	216.9	200.2	215.9					
G75.0	195.5	231.1	194.9	179.7	195.5					
G76.0	175.6	210.7	178.2	161.9	175.6					
G77.0	155.6	189.2	157.2	141.0	155.6					
G78.0	135.2	169.8	139.9	124.2	135.2					
G79.0	117.4	149.9	123.2	107.4	117.4					
G80.0	100.1	128.9	106.9	90.1	100.1					
G81.0	83.3	111.6	93.3	73.9	83.3					
G82.0	68.7	96.4	79.1	60.3	68.7					
G83.0	57.6	79.7	65.0	51.9	57.6					
G84.0	51.9	65.0	54.0	46.1	51.9					
G85.0	46.6	54.5	46.1	42.5	46.6					
G86.0	44.0	48.7	41.9	41.4	44.0					
G87.0	42.5	43.5	38.8	40.3	42.5					
G88.0	40.9	42.5	37.2	39.8	40.9					
G89.0	39.3	40.9	36.2	39.3	39.3					
G90.0	38.3	40.3	36.2	39.3	38.3					
G91.0	38.3	38.8	36.2	38.8	38.3					
G92.0	37.7	39.3	36.2	38.8	37.7					
G93.0	37.7	39.3	36.2	38.3	37.7					
G94.0	37.7	39.3	37.2	38.8	37.7					
G95.0	37.7	39.8	36.2	39.3	37.7					
G96.0	38.3	39.8	37.2	40.3	38.3					
G97.0	38.8	40.3	37.2	40.3	38.8					
G98.0	38.8	41.4	37.7	40.9	38.8					
G99.0	38.8	40.3	37.7	40.9	38.8					
G100.0	39.8	41.4	38.3	41.9	39.8					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C