

Report No.: XFL300TW-6000K

Test Time: 2025-04-10 16:37

Luminaire Property

Luminaire Manufacturer: LUXIBEL

Voltage: 219.4 V

Power: 270.70 W

Current: 1.258 A

Power Factor: 0.981

Photometric Results

CIE Class: Direct

Measurement Flux: 24154.2 lm

Downward Ratio: 100%

Horizontal Diffuse Angle(10%,50%,80%,100%): H118,H49.4,H24.6,H0

Vertical Diffuse Angle(10%,50%,80%,100%): V118.3,V49.5,V25.1,V1

Luminaire Efficacy Rating (LER): 89.28

Max. Intensity: 22207.59 cd

S/MH(C0/C180): 0.73

Total Rated Lamp Lumens: 24154.2 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 22097.55 cd


Pos of Max. Intensity: H90 V1

S/MH(C90/C270): 0.73

Picture Of Luminaire



Luminous Intensity Distribution Curve

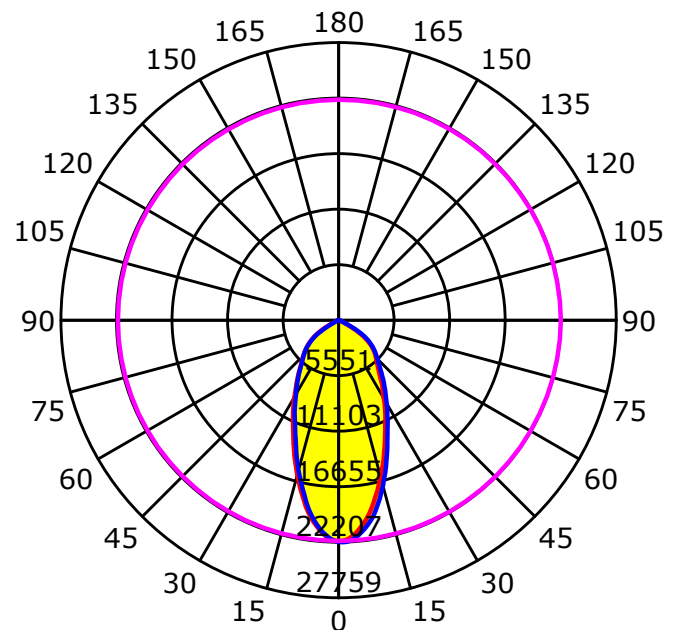

Unit: cd

Average Diffuse Angle(50%): 49.4°

— C0-C180 — C90-C270 — G1

C Plane (°): 0.0-360.0: 90.0

Test Lab: BTL

Test Type: TYPE C

Temperature:

Operator: Honor Chen

Gamma Plane (°): 0.0-180.0: 1.0



Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C


Luminous Intensity Distribution Curve

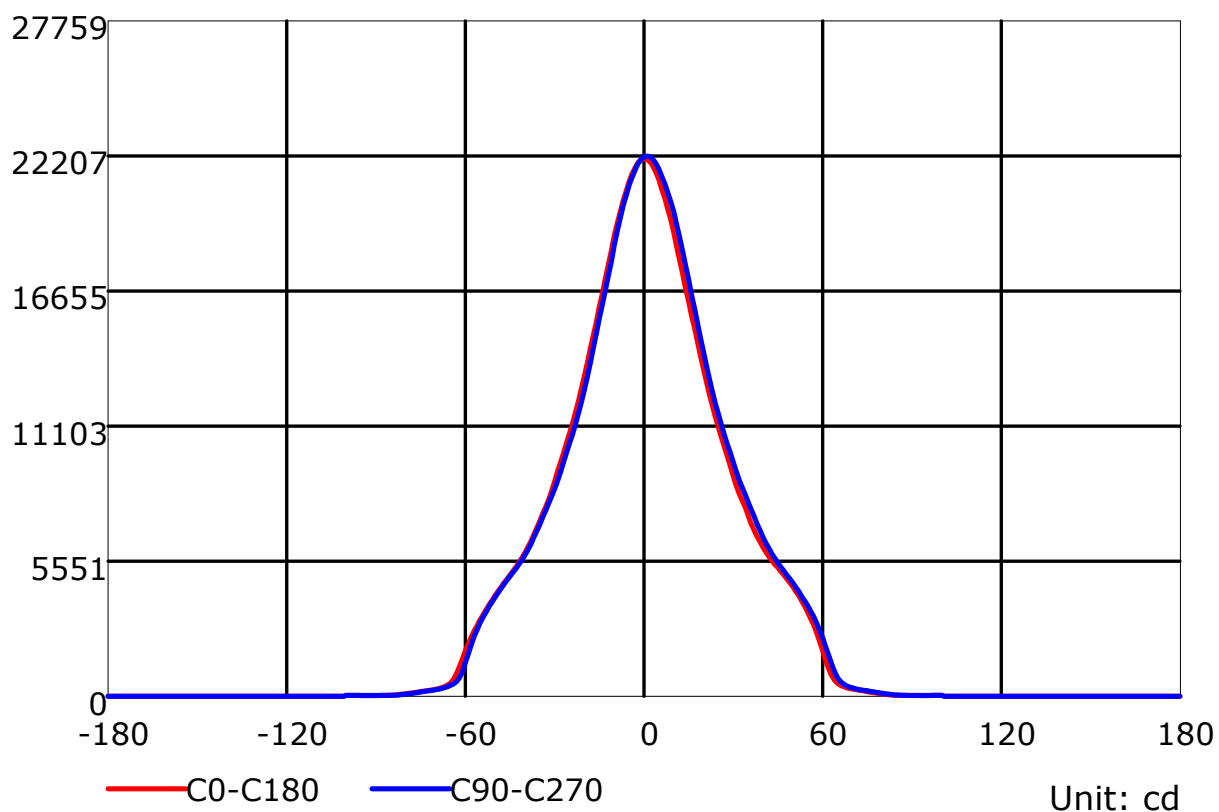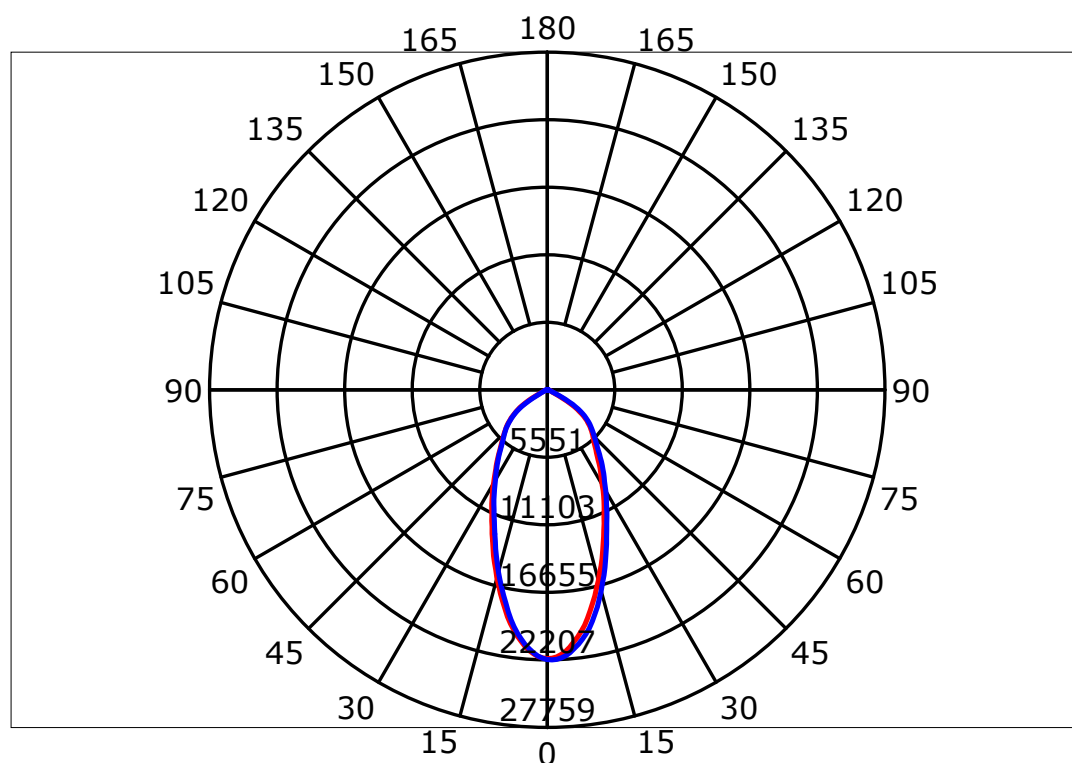

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Luminous Intensity Distribution Curve(cd/klm)

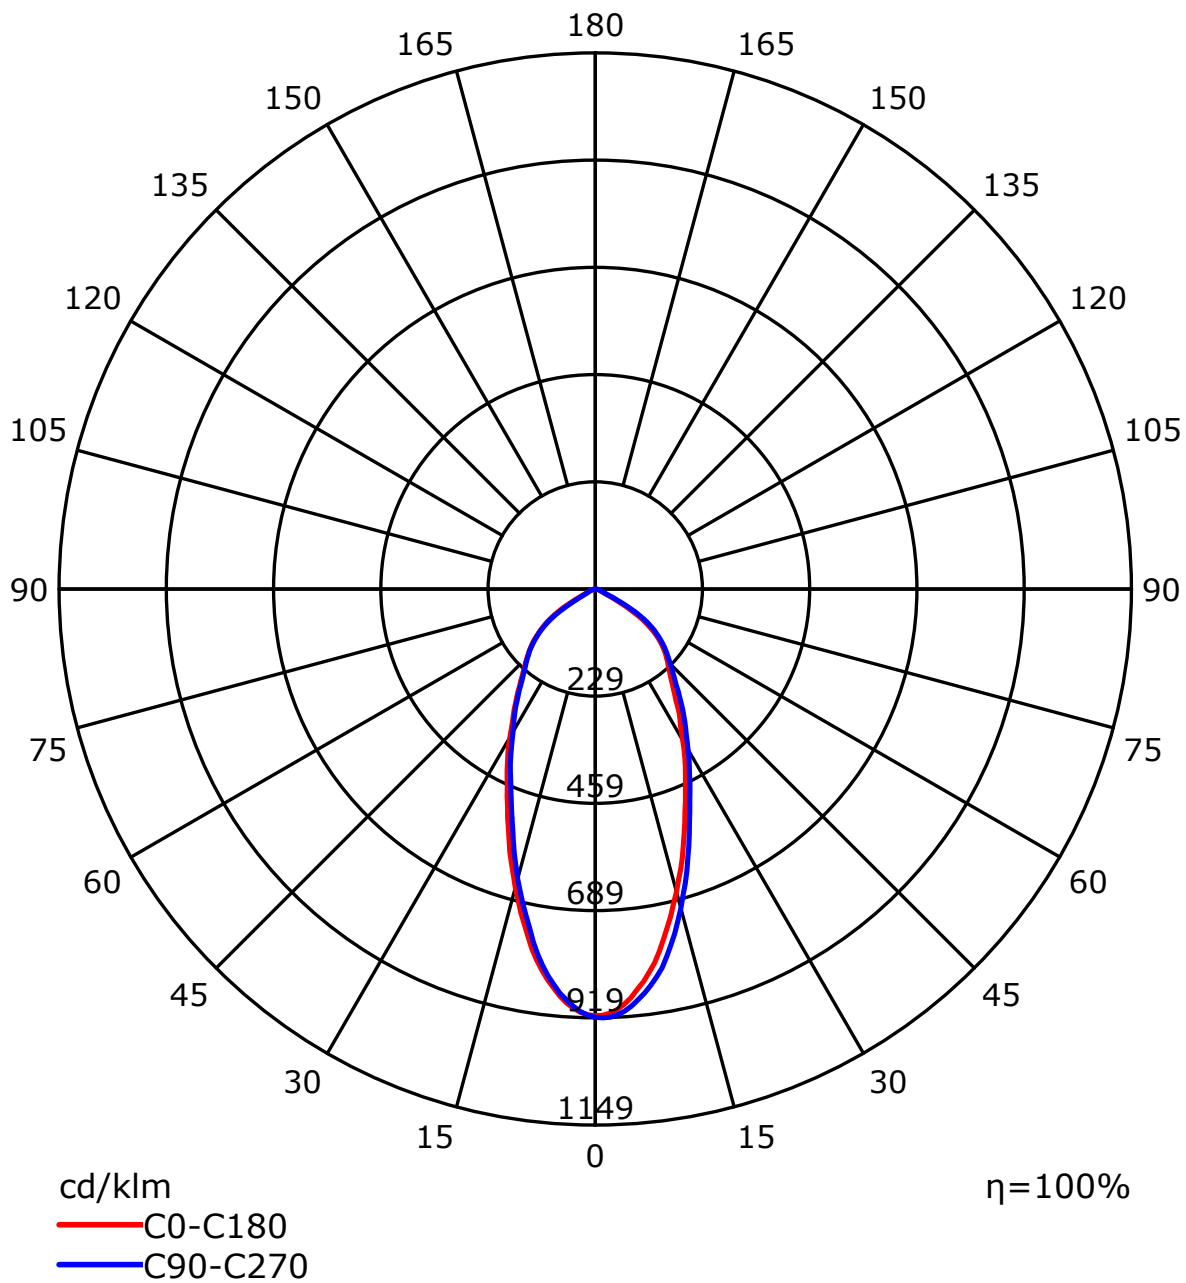


C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	103	109	106	103	101	102	100	98	98	97	95	95	93	92	90
2	105	98	93	89	102	97	92	88	93	89	86	90	87	84	87	85	82	80
3	98	89	83	78	95	88	82	78	85	80	76	83	78	75	80	77	74	72
4	91	82	75	69	89	80	74	69	78	72	68	76	71	67	74	70	66	65
5	85	75	68	62	83	74	67	62	72	66	61	70	65	61	68	64	60	58
6	80	69	61	56	78	68	61	56	66	60	56	65	59	55	63	58	55	53
7	75	64	56	51	73	63	56	51	61	55	51	60	55	50	59	54	50	48
8	70	59	52	47	69	58	52	47	57	51	47	56	50	46	55	50	46	44
9	67	55	48	43	65	55	48	43	53	47	43	52	47	43	52	46	43	41
10	63	52	45	40	62	51	45	40	50	44	40	49	44	40	48	43	40	38


Spacing Criteria (0-180): 0.73
 Spacing Criteria (90-270): 0.73
 Spacing Criteria (Diagonal): 0.84

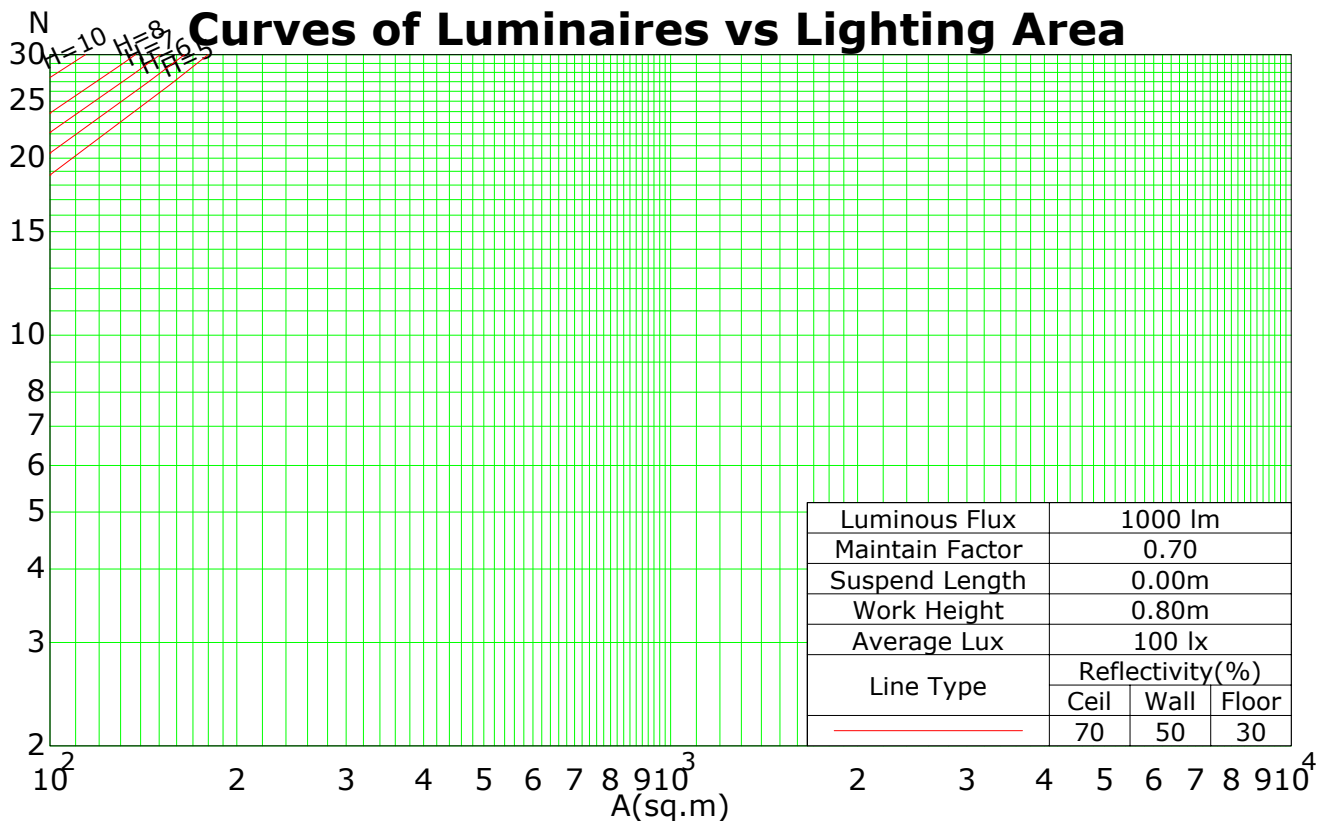

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C


Isocandela (rectangle)

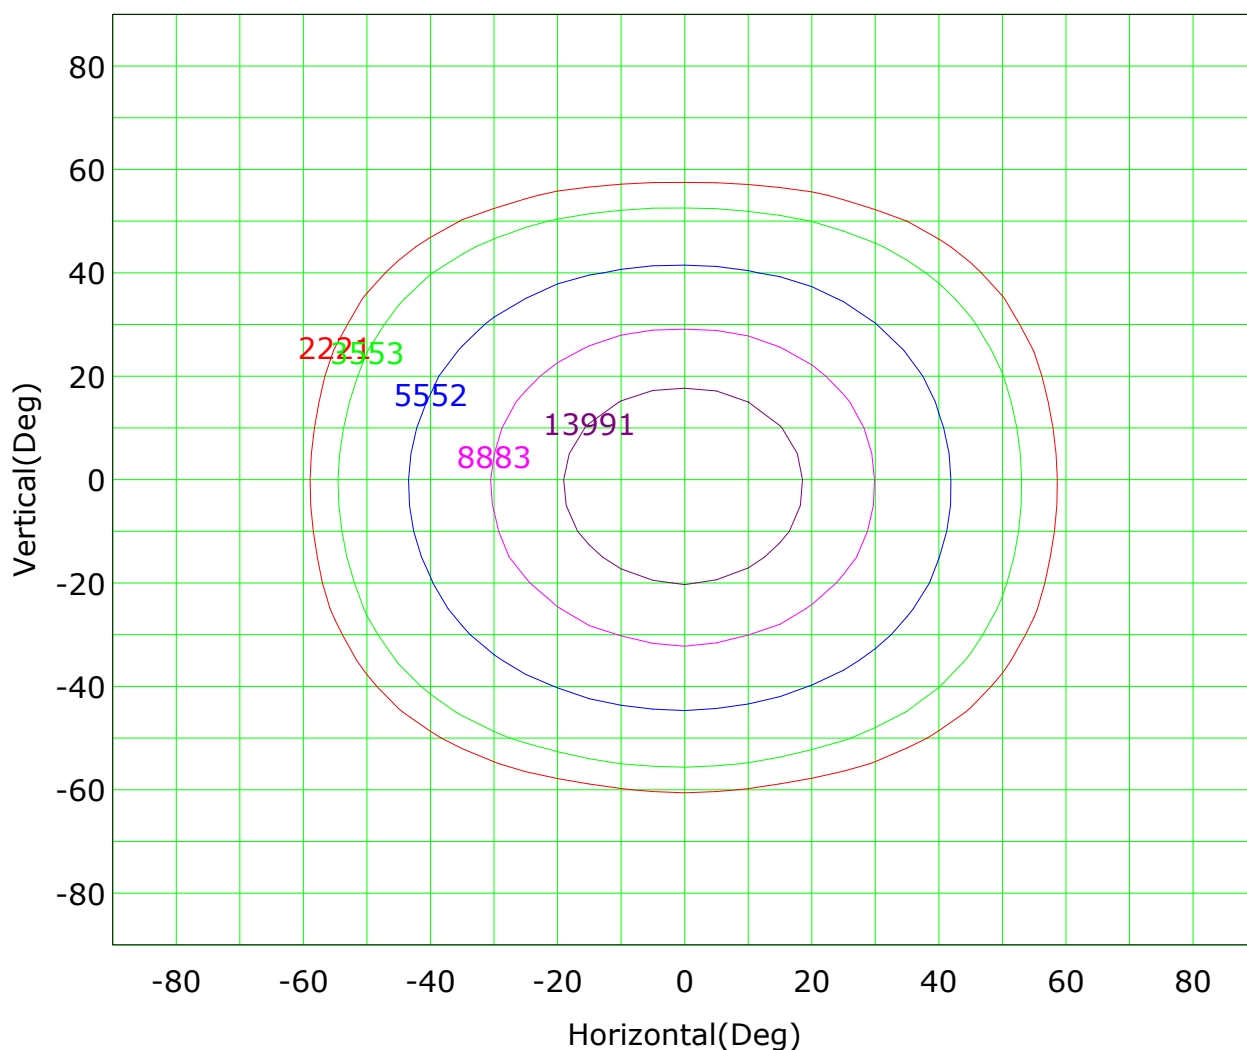

Imax (100%): 22208 cd

(10%): 2221 cd	(16%): 3553 cd
(25%): 5552 cd	(40%): 8883 cd
(63%): 13991 cd	(100%): 22208 cd

Isocandela (sphere)

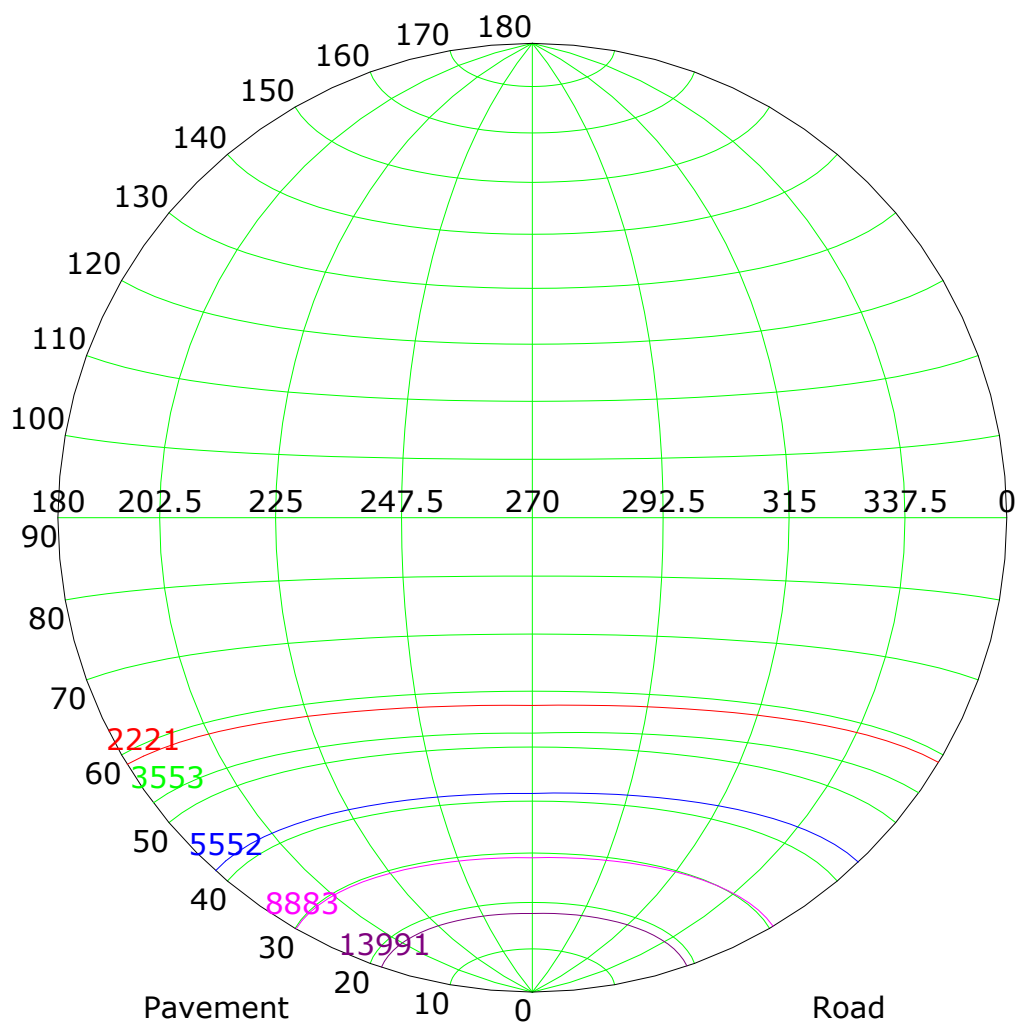


Imax (100%): 22208 cd

(10%): 2221 cd	(16%): 3553 cd
(25%): 5552 cd	(40%): 8883 cd
(63%): 13991 cd	(100%): 22208 cd

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

IsoLux Plot

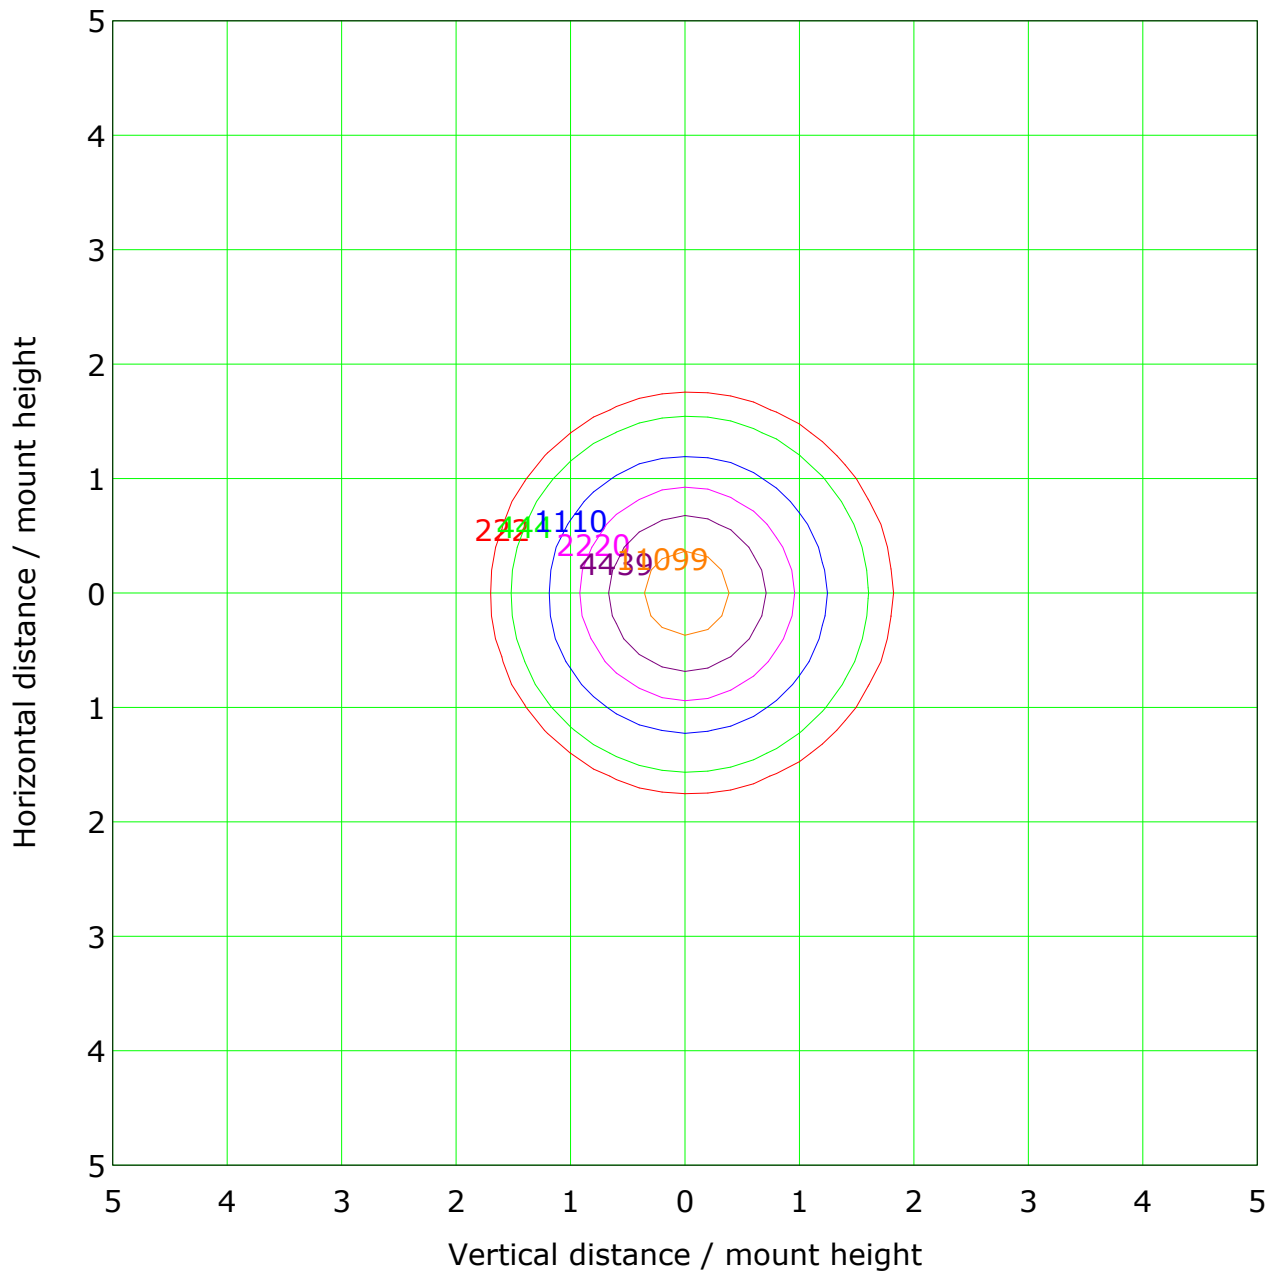

Mounting Height: 1.0m Max Lux(100%): 22197.4 lx


— (1%): 222.0 lx	— (2%): 443.9 lx
— (5%): 1109.9 lx	— (10%): 2219.7 lx
— (20%): 4439.5 lx	— (50%): 11098.7 lx
— (100%): 22197.4 lx	

C Plane (°): 0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Roadway CU Curve

Efficiency(%)

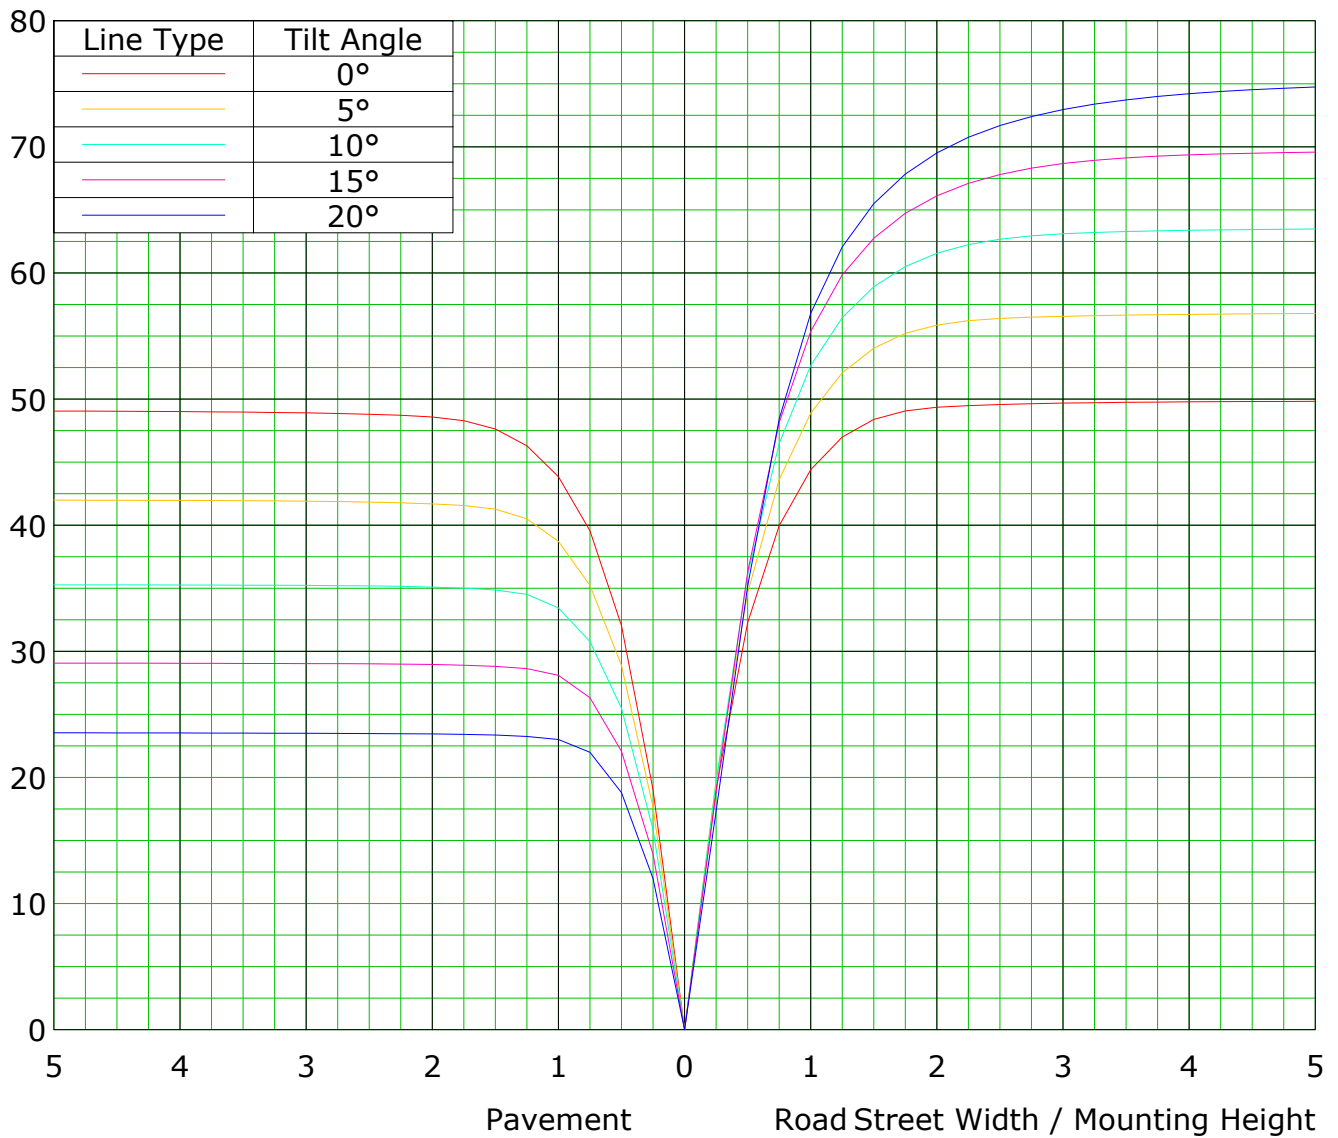



C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

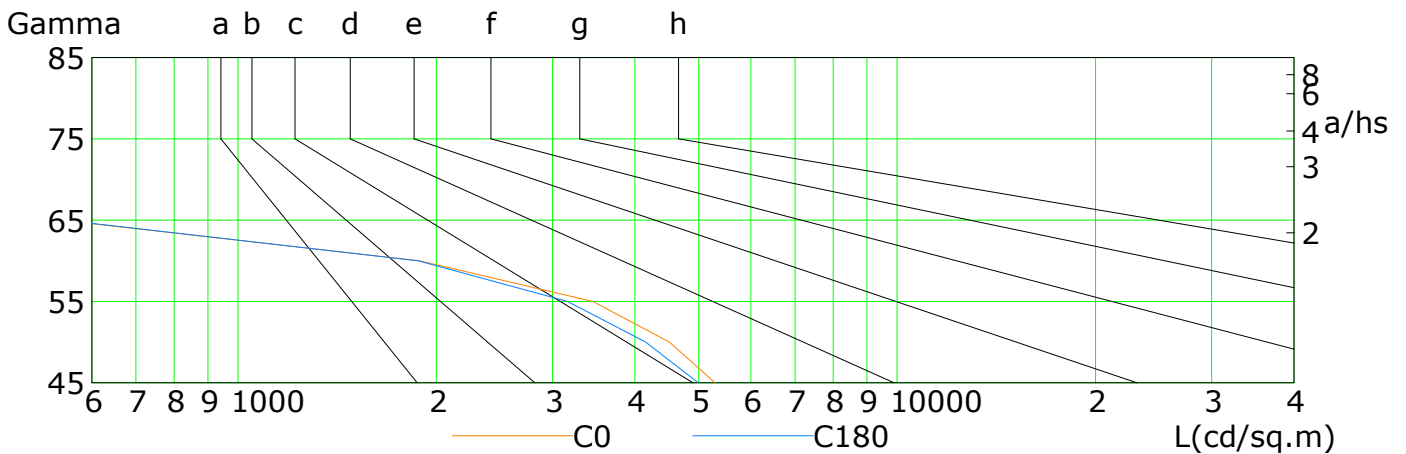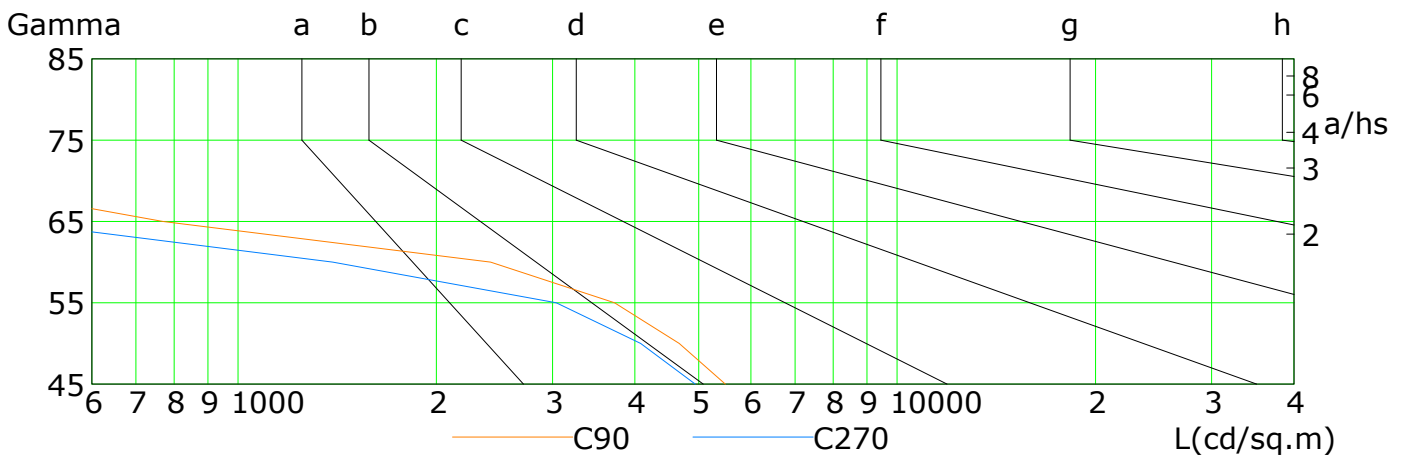


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	5293	4512	3455	1887	539	299	195	101	47
C90	5485	4670	3726	2417	769	351	231	129	55
C180	4992	4154	3162	1877	547	292	194	106	47
C270	4938	4081	3040	1392	452	273	178	89	42

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C


Illuminance at a Distance

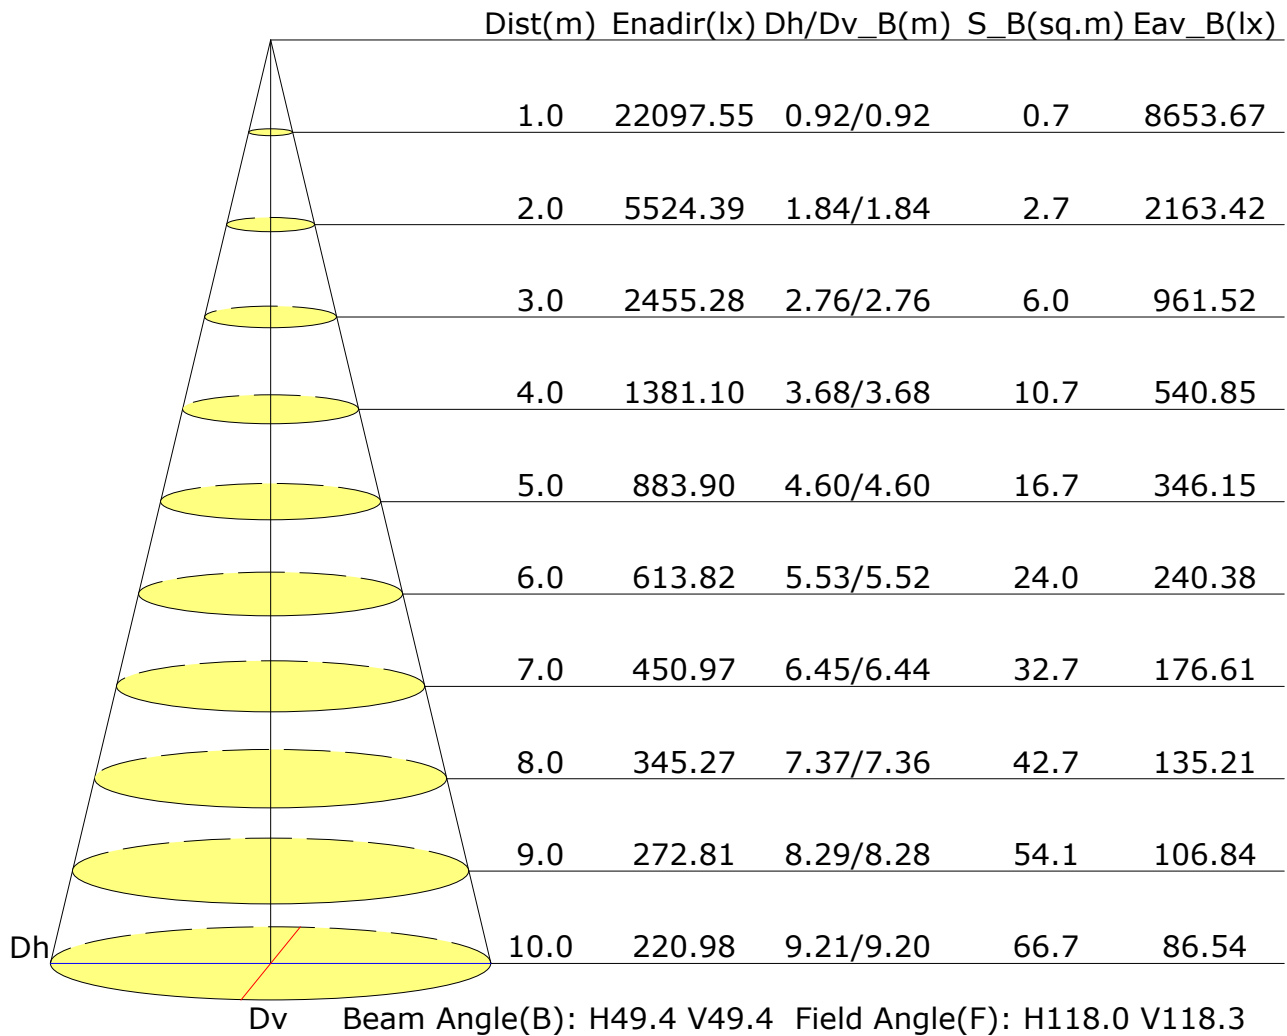

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Vertical IsoLux Plot

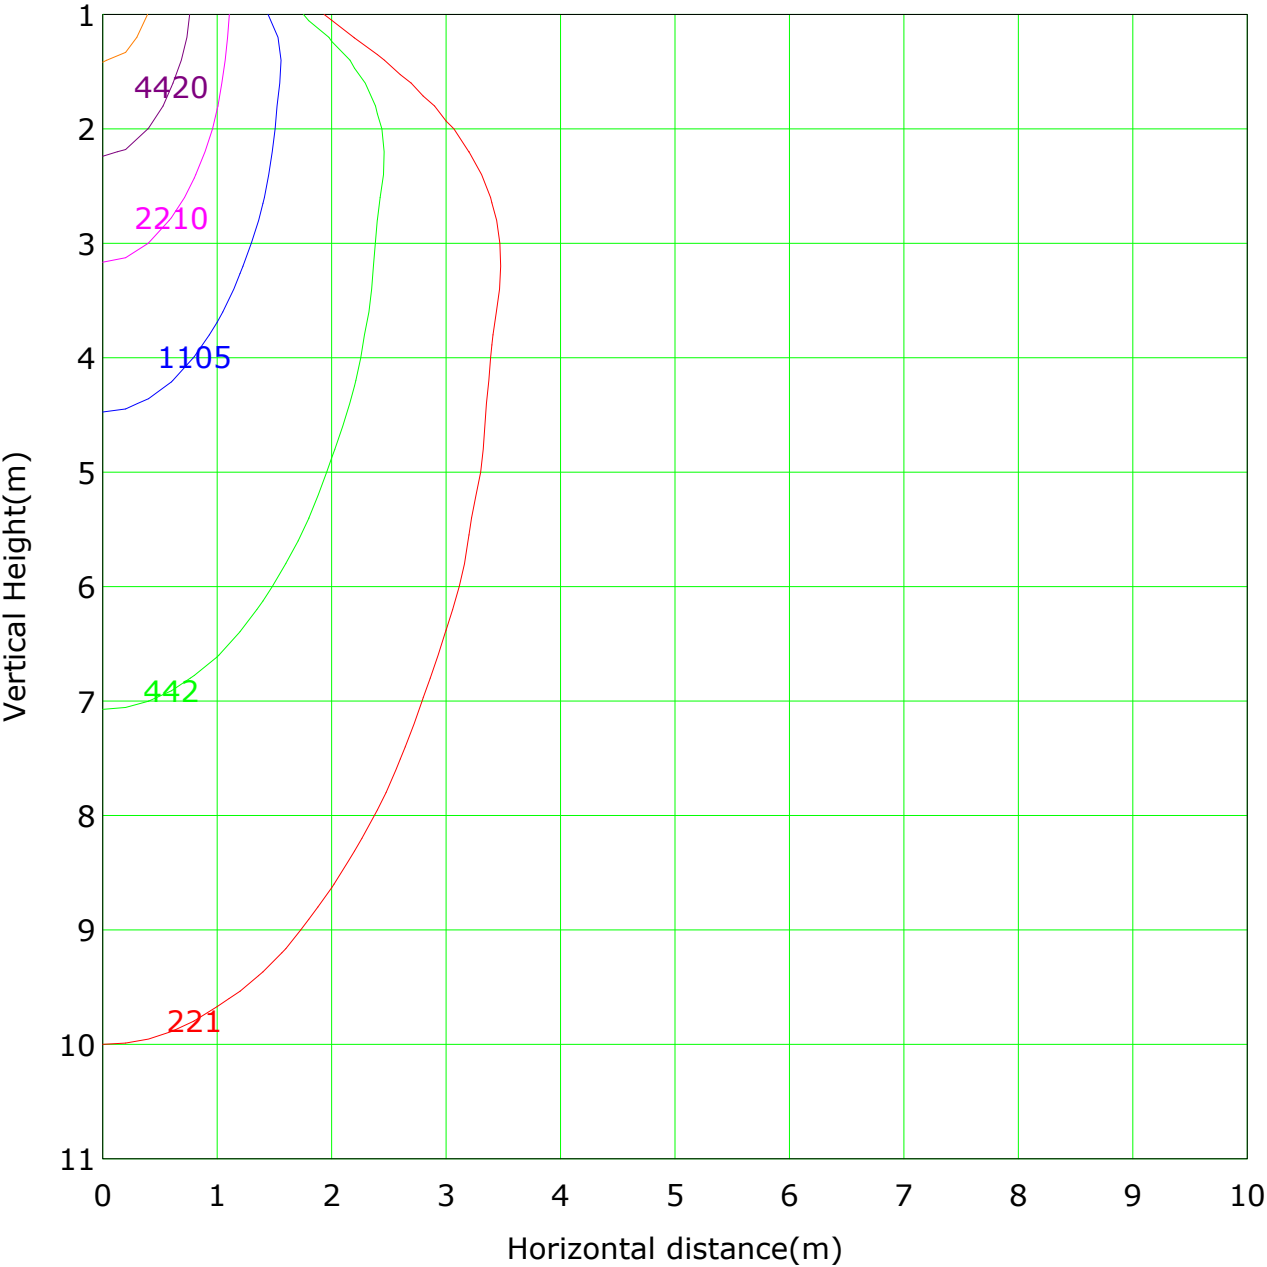

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 22097.6 lx

(1%): 221.0 lx	(2%): 442.0 lx
(5%):1104.9 lx	(10%):2209.8 lx
(20%):4419.5 lx	(50%):11048.8 lx
(100%):22097.6 lx	

C Plane (°):0.0-360.0: 90.0
Test Lab:BTL
Test Type: TYPE C
Temperature:
Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: C

Area Flux Table

Unit: lm

-90	0.1	0.3	0.5	0.7	0.9	1.1	1.3	1.5	1.5	1.5	1.5	1.3	1.1	0.9	0.7	0.5	0.3	0.1	16.1	0.0
-80	0.1	0.3	0.7	1.4	2.4	3.4	4.3	5.1	5.4	5.4	5.1	4.3	3.4	2.3	1.4	0.7	0.4	0.1	46.2	0.0
-70	0.1	0.5	1.4	3.0	5.0	7.5	10.8	14.4	16.8	16.7	14.3	10.7	7.6	5.1	3.0	1.4	0.4	0.1	118.9	0.0
-60	0.1	0.7	2.3	4.8	10.7	28.3	54.3	76.1	87.5	88.0	77.4	55.3	28.2	10.6	4.9	2.3	0.7	0.1	532.2	349.3
-50	0.1	1.0	3.1	9.1	36.7	78.0	111.6	135.6	148.4	149.1	137.7	115.1	81.6	37.3	8.9	3.2	0.9	0.1	1057.5	581.5
-40	0.1	1.2	4.1	22.0	68.2	111.7	151.3	188.6	212.6	213.2	190.4	154.2	116.2	72.3	22.0	4.2	1.2	0.1	1533.1	7483.4
-30	0.2	1.4	5.8	38.0	88.0	137.4	199.4	266.4	311.1	312.0	268.9	202.6	141.4	93.5	39.7	5.7	1.4	0.2	2112.2	2073.3
-20	0.2	1.5	8.2	48.9	100.5	161.8	253.1	363.7	455.2	456.7	367.5	257.3	166.0	106.1	52.3	7.9	1.5	0.2	2808.8	774.7
-10	0.2	1.6	10.0	54.2	107.0	178.3	292.4	450.6	559.7	601.5	545.6	229.8	218.3	211.2	58.6	9.6	1.6	0.2	3415.8	385.5
0	0.2	1.6	10.1	54.6	107.7	180.0	296.3	459.8	615.0	616.8	465.4	302.1	185.0	113.5	59.1	9.8	1.6	0.2	3479.0	448.9
10	0.2	1.5	8.6	50.4	102.5	166.4	262.6	383.9	492.7	494.2	387.8	266.9	170.6	108.1	53.9	8.3	1.6	0.2	2960.2	2927.0
20	0.2	1.4	6.2	40.7	91.2	143.0	211.1	286.6	342.9	343.8	289.0	214.2	147.0	96.7	42.4	6.1	1.4	0.2	2264.2	226.3
30	0.1	1.2	4.4	25.4	73.2	117.8	161.5	205.8	236.7	237.3	207.5	164.4	122.4	77.3	25.3	4.4	1.2	0.1	1666.1	1618.2
40	0.1	1.0	3.3	10.8	44.1	86.8	121.8	148.4	164.6	165.3	150.5	125.3	90.4	44.7	10.6	3.3	1.0	0.1	1172.2	103.4
50	0.1	0.7	2.4	5.3	13.7	38.6	70.2	94.6	108.4	108.9	95.9	71.2	38.5	13.6	5.4	2.4	0.7	0.1	670.7	532.2
60	0.1	0.5	1.6	3.3	5.6	9.0	15.0	23.3	29.6	29.6	23.2	14.9	9.0	5.7	3.3	1.5	0.5	0.1	175.7	1.4
70	0.1	0.3	0.8	1.7	2.8	4.1	5.3	6.3	6.9	6.9	6.3	5.3	4.0	2.7	1.6	0.8	0.4	0.1	56.3	0.0
80	0.1	0.3	0.5	0.7	1.0	1.3	1.6	1.8	2.0	2.0	1.8	1.6	1.3	1.0	0.8	0.5	0.3	0.1	19.0	0.0
90	2.4	17.2	73.8	375.1	1861.2	454.6	2223.7	1112.6	836.9	849.0	146.2	265.0	497.0	904.3	393.9	72.6	17.1	2.4	24105	
Flux(T)	0.0	0.0	0.0	251.9	774.1	1374.2	147.3	3037.9	763.5	776.3	7072.2	2190.1	1418.6	821.2	2277.4	0.0	0.0	0.0		22905
Flux(E)	0.0	0.0	0.0	251.9	774.1	1374.2	147.3	3037.9	763.5	776.3	7072.2	2190.1	1418.6	821.2	2277.4	0.0	0.0	0.0		22905


Horizontal plane

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: C

C Plane (°):0.0-360.0: 90.0
Test Lab:BTL
Test Type: TYPE C
Temperature:
Operator:Honor Chen

The Average Illuminance Effective Figure

Flux Out: 18246.57lm

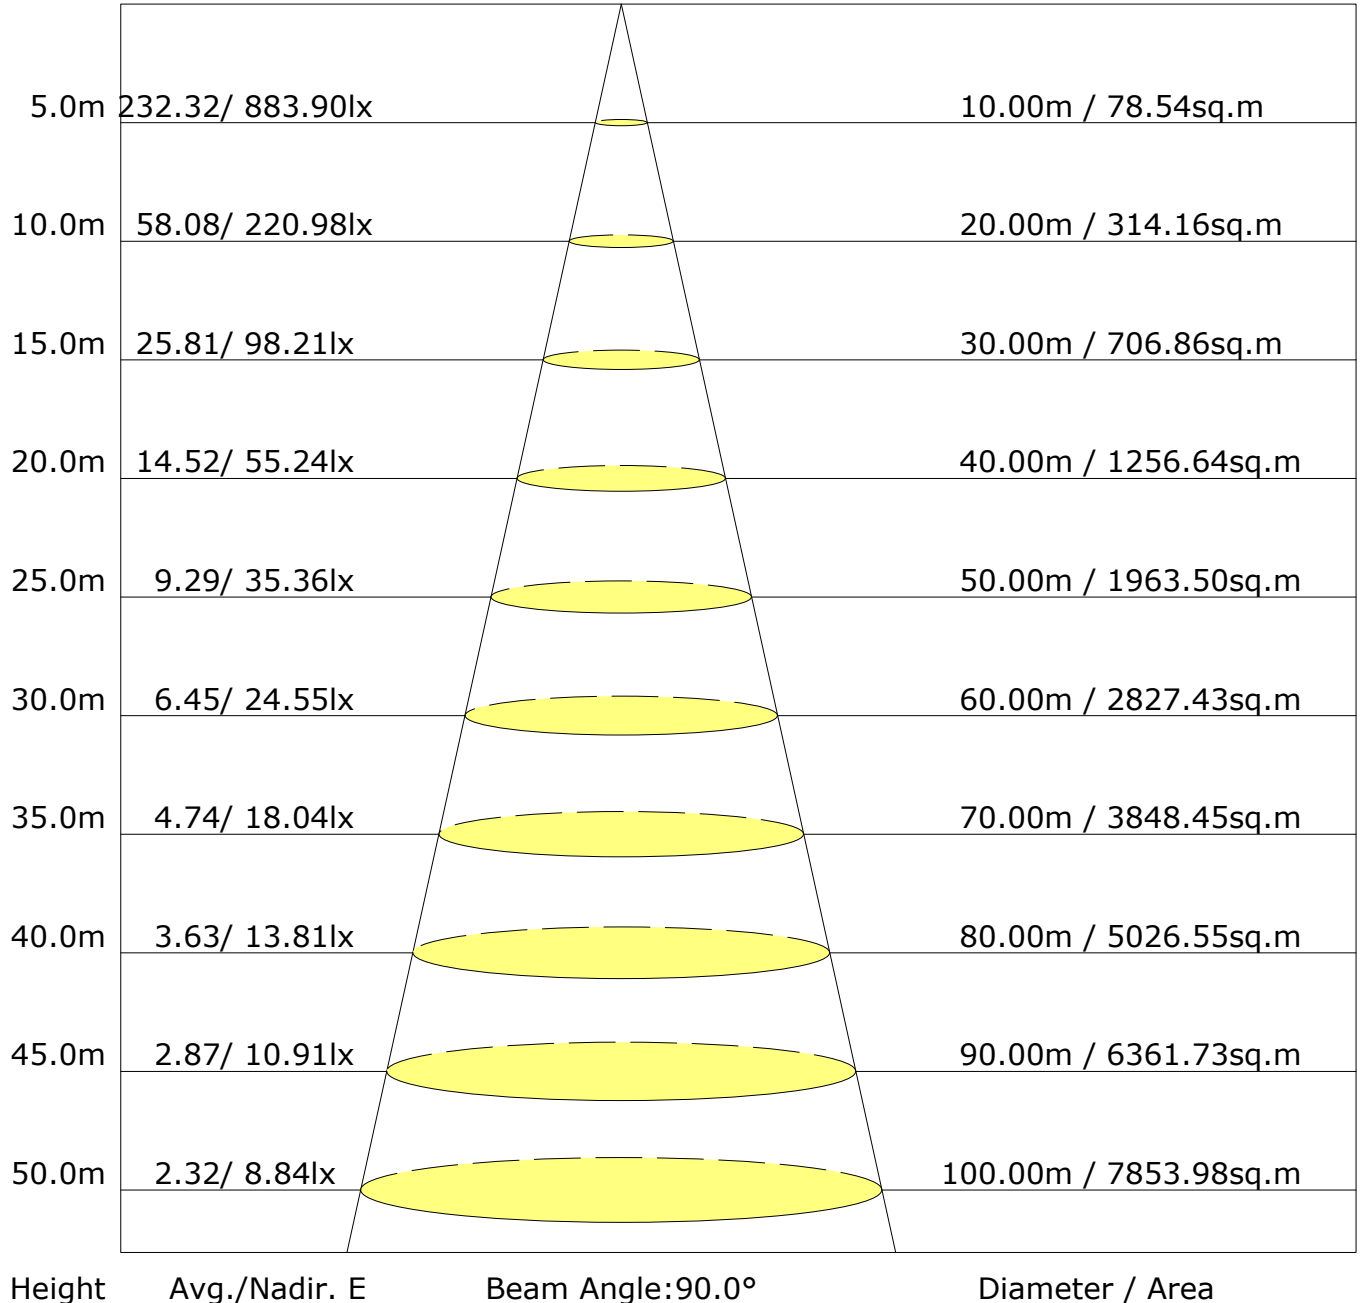

C Plane (°): 0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°): 0.0-180.0: 1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C


UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=4H Y=2H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
3H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=8H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
12H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
X=12H Y=4H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
6H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
8H	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$	-1.\$
Variations with the observer position at spacings:										
S=1.0H	-1.\$/-1.\$					-1.\$/-1.\$				
S=1.5H	-1.\$/-1.\$					-1.\$/-1.\$				
S=2.0H	-1.\$/-1.\$					-1.\$/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 24154lm ($8\log(F/F_0) = 11.1$).

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

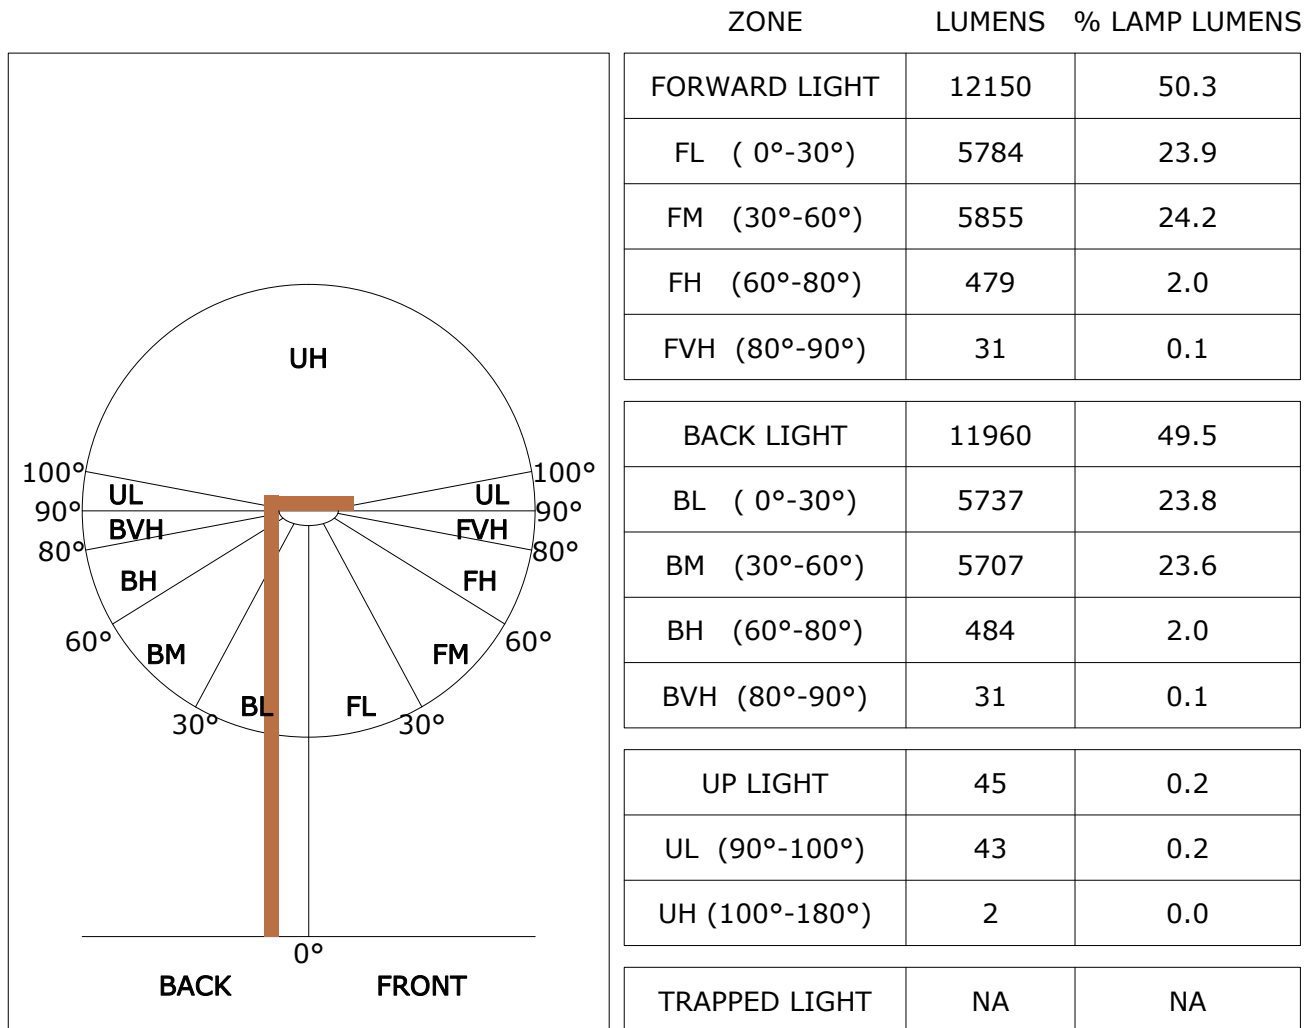
FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B5 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B5 U2 G1

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

LCS Graph

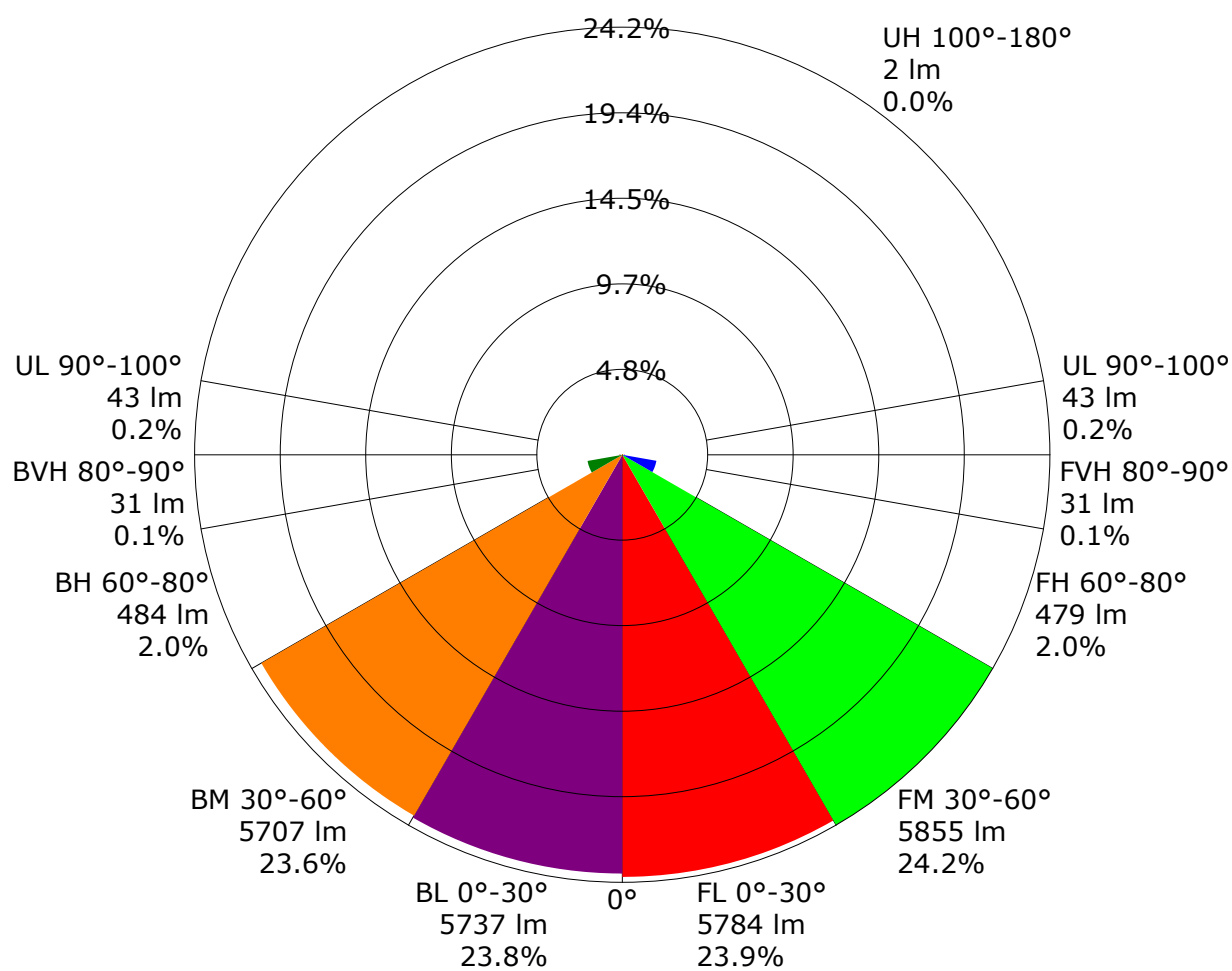

Back Light

Scale= MAX LCS%

Trapped Light:NA,NA

Forward Light

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.69	0.78	0.85	0.90	0.96	0.99	1.02	1.05	1.08	
	0.30		0.62	0.72	0.79	0.84	0.91	0.95	0.98	1.02	1.05	
	0.20		0.58	0.68	0.75	0.80	0.87	0.92	0.95	1.00	1.03	
0.50	0.50	0.20	0.67	0.77	0.83	0.87	0.93	0.96	0.99	1.02	1.04	
	0.30		0.62	0.71	0.78	0.82	0.89	0.93	0.95	0.99	1.01	
	0.20		0.57	0.67	0.74	0.79	0.85	0.90	0.93	0.97	1.00	
0.30	0.50	0.20	0.66	0.75	0.81	0.85	0.90	0.93	0.95	0.98	1.00	
	0.30		0.61	0.70	0.76	0.81	0.87	0.90	0.93	0.96	0.98	
	0.20		0.57	0.66	0.73	0.78	0.84	0.88	0.91	0.94	0.96	
0.00	0.00	0.00	0.55	0.64	0.70	0.75	0.80	0.84	0.87	0.90	0.92	
Rating:271W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.82	0.65	0.55	0.47	0.36	0.30	0.25	0.19	0.16	
	0.30		0.68	0.56	0.48	0.41	0.33	0.27	0.23	0.18	0.15	
	0.20		0.58	0.49	0.42	0.37	0.30	0.25	0.22	0.17	0.14	
0.50	0.50	0.20	0.78	0.62	0.52	0.44	0.34	0.32	0.24	0.18	0.15	
	0.30		0.66	0.54	0.46	0.40	0.31	0.26	0.22	0.17	0.14	
	0.20		0.58	0.48	0.41	0.36	0.29	0.24	0.21	0.16	0.13	
0.30	0.50	0.20	0.76	0.60	0.49	0.42	0.33	0.26	0.22	0.17	0.14	
	0.30		0.65	0.53	0.44	0.38	0.30	0.25	0.21	0.16	0.13	
	0.20		0.57	0.47	0.40	0.35	0.28	0.23	0.20	0.15	0.13	
0.00	0.00	0.00	0.45	0.36	0.30	0.25	0.20	0.16	0.14	0.10	0.08	
Rating:271W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.15	0.16	0.17	0.18	0.19	0.20	0.20	0.21	0.21
	0.30		0.09	0.11	0.13	0.14	0.15	0.17	0.17	0.19	0.20
	0.20		0.05	0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.18
0.50	0.50	0.20	0.14	0.16	0.17	0.17	0.18	0.19	0.19	0.20	0.20
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19
	0.20		0.05	0.07	0.09	0.10	0.12	0.13	0.15	0.16	0.17
0.30	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.18	0.19	0.19	0.20
	0.30		0.09	0.11	0.12	0.13	0.14	0.16	0.16	0.17	0.18
	0.20		0.05	0.07	0.09	0.10	0.12	0.13	0.14	0.16	0.17
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rating:271W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980											

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	22118.4	21.2	21.2	0.09	0.09
1.0-2.0	22050.9	63.3	84.5	0.26	0.35
2.0-3.0	21908.1	104.8	189.3	0.43	0.78
3.0-4.0	21692.9	145.2	334.5	0.60	1.38
4.0-5.0	21422.0	184.3	518.8	0.76	2.15
5.0-6.0	21083.7	221.6	740.4	0.92	3.07
6.0-7.0	20709.5	257.1	997.5	1.06	4.13
7.0-8.0	20306.6	290.7	1288.1	1.20	5.33
8.0-9.0	19857.2	321.9	1610.0	1.33	6.67
9.0-10.0	19370.2	350.6	1960.6	1.45	8.12
10.0-11.0	18813.2	376.0	2336.6	1.56	9.67
11.0-12.0	18229.7	398.6	2735.1	1.65	11.32
12.0-13.0	17671.5	419.4	3154.5	1.74	13.06
13.0-14.0	17090.4	437.5	3592.1	1.81	14.87
14.0-15.0	16508.3	453.3	4045.3	1.88	16.75
15.0-16.0	15926.3	466.7	4512.1	1.93	18.68
16.0-17.0	15345.2	477.9	4990.0	1.98	20.66
17.0-18.0	14787.0	487.6	5477.6	2.02	22.68
18.0-19.0	14202.2	494.2	5971.8	2.05	24.72
19.0-20.0	13625.2	498.8	6470.5	2.06	26.79
20.0-21.0	13090.7	502.7	6973.3	2.08	28.87
21.0-22.0	12567.9	505.1	7478.4	2.09	30.96
22.0-23.0	12076.4	506.8	7985.2	2.10	33.06
23.0-24.0	11612.0	507.8	8492.9	2.10	35.16
24.0-25.0	11173.5	508.1	9001.1	2.10	37.26
25.0-26.0	10773.9	508.6	9509.7	2.11	39.37
26.0-27.0	10371.4	507.5	10017.2	2.10	41.47
27.0-28.0	9974.1	505.0	10522.2	2.09	43.56
28.0-29.0	9596.6	502.2	11024.4	2.08	45.64
29.0-30.0	9209.6	497.3	11521.7	2.06	47.70
30.0-31.0	8832.0	491.6	12013.2	2.04	49.74
31.0-32.0	8485.9	486.2	12499.5	2.01	51.75
32.0-33.0	8171.2	481.5	12980.9	1.99	53.74
33.0-34.0	7886.0	477.3	13458.2	1.98	55.72
34.0-35.0	7583.6	471.0	13929.3	1.95	57.67
35.0-36.0	7276.3	463.4	14392.6	1.92	59.59

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	6994.5	456.2	14848.9	1.89	61.48
37.0-38.0	6717.3	448.4	15297.3	1.86	63.33
38.0-39.0	6457.1	440.8	15738.1	1.82	65.16
39.0-40.0	6212.5	433.3	16171.4	1.79	66.95
40.0-41.0	5985.6	426.3	16597.7	1.76	68.72
41.0-42.0	5787.8	420.6	17018.3	1.74	70.46
42.0-43.0	5598.9	414.8	17433.1	1.72	72.17
43.0-44.0	5422.7	409.3	17842.4	1.69	73.87
44.0-45.0	5258.3	404.2	18246.6	1.67	75.54
45.0-46.0	5095.1	398.5	18645.1	1.65	77.19
46.0-47.0	4936.2	392.7	19037.7	1.63	78.82
47.0-48.0	4774.4	386.0	19423.8	1.60	80.42
48.0-49.0	4606.8	378.4	19802.1	1.57	81.98
49.0-50.0	4439.3	370.2	20172.3	1.53	83.51
50.0-51.0	4257.8	360.3	20532.6	1.49	85.01
51.0-52.0	4072.4	349.5	20882.1	1.45	86.45
52.0-53.0	3877.1	337.3	21219.4	1.40	87.85
53.0-54.0	3669.0	323.4	21542.8	1.34	89.19
54.0-55.0	3456.7	308.6	21851.4	1.28	90.47
55.0-56.0	3223.4	291.3	22142.7	1.21	91.67
56.0-57.0	2976.3	272.2	22414.9	1.13	92.80
57.0-58.0	2707.6	250.4	22665.3	1.04	93.84
58.0-59.0	2394.8	223.9	22889.2	0.93	94.76
59.0-60.0	2059.7	194.6	23083.8	0.81	95.57
60.0-61.0	1707.3	163.0	23246.8	0.67	96.24
61.0-62.0	1365.0	131.5	23378.3	0.54	96.79
62.0-63.0	1075.0	104.6	23482.9	0.43	97.22
63.0-64.0	832.7	81.7	23564.6	0.34	97.56
64.0-65.0	650.4	64.4	23629.0	0.27	97.83
65.0-66.0	530.6	53.0	23682.0	0.22	98.04
66.0-67.0	451.1	45.4	23727.3	0.19	98.23
67.0-68.0	393.7	39.9	23767.2	0.17	98.40
68.0-69.0	351.0	35.8	23803.0	0.15	98.55
69.0-70.0	317.9	32.7	23835.7	0.14	98.68
70.0-71.0	291.3	30.1	23865.8	0.12	98.81
71.0-72.0	268.2	27.9	23893.7	0.12	98.92

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	248.1	26.0	23919.6	0.11	99.03
73.0-74.0	229.4	24.1	23943.7	0.10	99.13
74.0-75.0	209.9	22.2	23965.9	0.09	99.22
75.0-76.0	190.1	20.2	23986.1	0.08	99.30
76.0-77.0	170.4	18.2	24004.3	0.08	99.38
77.0-78.0	151.2	16.2	24020.5	0.07	99.45
78.0-79.0	133.3	14.3	24034.8	0.06	99.51
79.0-80.0	115.5	12.5	24047.2	0.05	99.56
80.0-81.0	98.6	10.7	24057.9	0.04	99.60
81.0-82.0	83.6	9.1	24067.0	0.04	99.64
82.0-83.0	70.1	7.6	24074.6	0.03	99.67
83.0-84.0	59.0	6.4	24081.0	0.03	99.70
84.0-85.0	51.0	5.6	24086.6	0.02	99.72
85.0-86.0	45.9	5.0	24091.6	0.02	99.74
86.0-87.0	43.0	4.7	24096.3	0.02	99.76
87.0-88.0	41.2	4.5	24100.8	0.02	99.78
88.0-89.0	39.5	4.3	24105.1	0.02	99.80
89.0-90.0	38.5	4.2	24109.4	0.02	99.81
90.0-91.0	38.5	4.2	24113.6	0.02	99.83
91.0-92.0	38.7	4.2	24117.8	0.02	99.85
92.0-93.0	38.8	4.2	24122.1	0.02	99.87
93.0-94.0	38.4	4.2	24126.3	0.02	99.88
94.0-95.0	38.5	4.2	24130.5	0.02	99.90
95.0-96.0	38.8	4.2	24134.7	0.02	99.92
96.0-97.0	39.4	4.3	24139.0	0.02	99.94
97.0-98.0	39.8	4.3	24143.4	0.02	99.95
98.0-99.0	40.0	4.3	24147.7	0.02	99.97
99.0-100.0	40.3	4.4	24152.0	0.02	99.99
100.0-101.0	20.2	2.2	24154.2	0.01	100.00
101.0-102.0	0.0	0.0	24154.2	0.00	100.00
102.0-103.0	0.0	0.0	24154.2	0.00	100.00
103.0-104.0	0.0	0.0	24154.2	0.00	100.00
104.0-105.0	0.0	0.0	24154.2	0.00	100.00
105.0-106.0	0.0	0.0	24154.2	0.00	100.00
106.0-107.0	0.0	0.0	24154.2	0.00	100.00
107.0-108.0	0.0	0.0	24154.2	0.00	100.00

C Plane (°):0.0-360.0: 90.0
 Test Lab:BTL
 Test Type: TYPE C
 Temperature:
 Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	24154.2	0.00	100.00
109.0-110.0	0.0	0.0	24154.2	0.00	100.00
110.0-111.0	0.0	0.0	24154.2	0.00	100.00
111.0-112.0	0.0	0.0	24154.2	0.00	100.00
112.0-113.0	0.0	0.0	24154.2	0.00	100.00
113.0-114.0	0.0	0.0	24154.2	0.00	100.00
114.0-115.0	0.0	0.0	24154.2	0.00	100.00
115.0-116.0	0.0	0.0	24154.2	0.00	100.00
116.0-117.0	0.0	0.0	24154.2	0.00	100.00
117.0-118.0	0.0	0.0	24154.2	0.00	100.00
118.0-119.0	0.0	0.0	24154.2	0.00	100.00
119.0-120.0	0.0	0.0	24154.2	0.00	100.00
120.0-121.0	0.0	0.0	24154.2	0.00	100.00
121.0-122.0	0.0	0.0	24154.2	0.00	100.00
122.0-123.0	0.0	0.0	24154.2	0.00	100.00
123.0-124.0	0.0	0.0	24154.2	0.00	100.00
124.0-125.0	0.0	0.0	24154.2	0.00	100.00
125.0-126.0	0.0	0.0	24154.2	0.00	100.00
126.0-127.0	0.0	0.0	24154.2	0.00	100.00
127.0-128.0	0.0	0.0	24154.2	0.00	100.00
128.0-129.0	0.0	0.0	24154.2	0.00	100.00
129.0-130.0	0.0	0.0	24154.2	0.00	100.00
130.0-131.0	0.0	0.0	24154.2	0.00	100.00
131.0-132.0	0.0	0.0	24154.2	0.00	100.00
132.0-133.0	0.0	0.0	24154.2	0.00	100.00
133.0-134.0	0.0	0.0	24154.2	0.00	100.00
134.0-135.0	0.0	0.0	24154.2	0.00	100.00
135.0-136.0	0.0	0.0	24154.2	0.00	100.00
136.0-137.0	0.0	0.0	24154.2	0.00	100.00
137.0-138.0	0.0	0.0	24154.2	0.00	100.00
138.0-139.0	0.0	0.0	24154.2	0.00	100.00
139.0-140.0	0.0	0.0	24154.2	0.00	100.00
140.0-141.0	0.0	0.0	24154.2	0.00	100.00
141.0-142.0	0.0	0.0	24154.2	0.00	100.00
142.0-143.0	0.0	0.0	24154.2	0.00	100.00
143.0-144.0	0.0	0.0	24154.2	0.00	100.00

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	24154.2	0.00	100.00
145.0-146.0	0.0	0.0	24154.2	0.00	100.00
146.0-147.0	0.0	0.0	24154.2	0.00	100.00
147.0-148.0	0.0	0.0	24154.2	0.00	100.00
148.0-149.0	0.0	0.0	24154.2	0.00	100.00
149.0-150.0	0.0	0.0	24154.2	0.00	100.00
150.0-151.0	0.0	0.0	24154.2	0.00	100.00
151.0-152.0	0.0	0.0	24154.2	0.00	100.00
152.0-153.0	0.0	0.0	24154.2	0.00	100.00
153.0-154.0	0.0	0.0	24154.2	0.00	100.00
154.0-155.0	0.0	0.0	24154.2	0.00	100.00
155.0-156.0	0.0	0.0	24154.2	0.00	100.00
156.0-157.0	0.0	0.0	24154.2	0.00	100.00
157.0-158.0	0.0	0.0	24154.2	0.00	100.00
158.0-159.0	0.0	0.0	24154.2	0.00	100.00
159.0-160.0	0.0	0.0	24154.2	0.00	100.00
160.0-161.0	0.0	0.0	24154.2	0.00	100.00
161.0-162.0	0.0	0.0	24154.2	0.00	100.00
162.0-163.0	0.0	0.0	24154.2	0.00	100.00
163.0-164.0	0.0	0.0	24154.2	0.00	100.00
164.0-165.0	0.0	0.0	24154.2	0.00	100.00
165.0-166.0	0.0	0.0	24154.2	0.00	100.00
166.0-167.0	0.0	0.0	24154.2	0.00	100.00
167.0-168.0	0.0	0.0	24154.2	0.00	100.00
168.0-169.0	0.0	0.0	24154.2	0.00	100.00
169.0-170.0	0.0	0.0	24154.2	0.00	100.00
170.0-171.0	0.0	0.0	24154.2	0.00	100.00
171.0-172.0	0.0	0.0	24154.2	0.00	100.00
172.0-173.0	0.0	0.0	24154.2	0.00	100.00
173.0-174.0	0.0	0.0	24154.2	0.00	100.00
174.0-175.0	0.0	0.0	24154.2	0.00	100.00
175.0-176.0	0.0	0.0	24154.2	0.00	100.00
176.0-177.0	0.0	0.0	24154.2	0.00	100.00
177.0-178.0	0.0	0.0	24154.2	0.00	100.00
178.0-179.0	0.0	0.0	24154.2	0.00	100.00
179.0-180.0	0.0	0.0	24154.2	0.00	100.00

C Plane (°):0.0-360.0: 90.0
 Test Lab: BTL
 Test Type: TYPE C
 Temperature:
 Operator: Honor Chen

Gamma Plane (°):0.0-180.0:1.0
 Test Device: GPM-1600L
 Distance: 8.443 m
 Humidity:
 Inspector: C

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	22097.6	22174.6	22097.6	22174.6	22097.6					
G1.0	22070.8	22207.6	22048.8	22075.5	22070.8					
G2.0	21979.6	22181.4	21938.3	21905.2	21979.6					
G3.0	21803.1	22078.2	21733.9	21645.3	21803.1					
G4.0	21549.9	21906.3	21487.6	21339.3	21549.9					
G5.0	21243.4	21674.1	21161.1	21014.4	21243.4					
G6.0	20842.5	21366.5	20768.1	20599.4	20842.5					
G7.0	20482.5	21066.8	20375.1	20175.4	20482.5					
G8.0	20043.4	20711.0	19924.9	19673.4	20043.4					
G9.0	19599.5	20330.0	19443.4	19131.6	19599.5					
G10.0	19071.3	19917.1	18930.3	18538.4	19071.3					
G11.0	18488.6	19383.1	18309.9	17866.6	18488.6					
G12.0	17921.1	18845.5	17733.0	17290.2	17921.1					
G13.0	17381.3	18306.8	17183.3	16711.1	17381.3					
G14.0	16767.2	17701.5	16556.5	16115.8	16767.2					
G15.0	16239.0	17126.7	16012.1	15547.8	16239.0					
G16.0	15651.0	16491.6	15404.7	14937.8	15651.0					
G17.0	15140.6	15934.0	14857.1	14344.6	15140.6					
G18.0	14589.3	15345.0	14332.6	13752.5	14589.3					
G19.0	13999.3	14717.7	13723.7	13157.2	13999.3					
G20.0	13451.7	14154.9	13174.0	12623.2	13451.7					
G21.0	12929.8	13587.4	12676.7	12128.0	12929.8					
G22.0	12407.8	13026.7	12141.6	11644.8	12407.8					
G23.0	11953.5	12520.5	11700.4	11215.7	11953.5					
G24.0	11480.3	12023.2	11223.5	10779.2	11480.3					
G25.0	11058.5	11594.0	10811.1	10418.1	11058.5					
G26.0	10660.2	11171.7	10433.3	10044.0	10660.2					
G27.0	10258.8	10740.9	10016.2	9646.2	10258.8					
G28.0	9874.7	10364.1	9638.9	9253.2	9874.7					
G29.0	9476.4	10012.0	9274.2	8879.6	9476.4					
G30.0	9050.4	9612.2	8837.7	8534.3	9050.4					
G31.0	8665.3	9246.9	8462.5	8247.1	8665.3					
G32.0	8332.5	8886.9	8095.1	7951.0	8332.5					
G33.0	8054.2	8594.5	7799.0	7656.0	8054.2					
G34.0	7783.9	8296.3	7524.5	7379.8	7783.9					
G35.0	7433.3	7976.7	7203.8	7070.6	7433.3					
G36.0	7101.0	7686.4	6932.3	6806.0	7101.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	6830.1	7394.0	6656.1	6549.8	6830.1					
G38.0	6574.4	7086.4	6379.5	6267.9	6574.4					
G39.0	6355.9	6823.8	6141.6	6027.8	6355.9					
G40.0	6121.6	6530.4	5894.7	5804.1	6121.6					
G41.0	5932.0	6295.1	5698.8	5608.1	5932.0					
G42.0	5739.1	6082.9	5510.1	5436.2	5739.1					
G43.0	5576.7	5857.5	5327.2	5261.2	5576.7					
G44.0	5420.0	5666.8	5162.2	5109.8	5420.0					
G45.0	5292.6	5485.5	4991.9	4937.9	5292.6					
G46.0	5130.2	5313.6	4824.2	4784.9	5130.2					
G47.0	4988.7	5153.8	4670.6	4624.0	4988.7					
G48.0	4828.4	4988.2	4498.7	4443.2	4828.4					
G49.0	4674.3	4828.4	4326.9	4266.6	4674.3					
G50.0	4512.4	4670.1	4154.5	4081.1	4512.4					
G51.0	4309.6	4487.2	3956.9	3890.4	4309.6					
G52.0	4145.5	4309.0	3774.5	3705.9	4145.5					
G53.0	3924.4	4102.6	3572.8	3482.1	3924.4					
G54.0	3710.6	3921.3	3365.8	3272.0	3710.6					
G55.0	3455.4	3726.3	3162.0	3040.4	3455.4					
G56.0	3203.4	3502.1	2933.5	2764.2	3203.4					
G57.0	2946.1	3277.2	2698.7	2484.9	2946.1					
G58.0	2631.1	3014.2	2458.7	2149.5	2631.1					
G59.0	2257.0	2715.5	2173.1	1759.2	2257.0					
G60.0	1887.0	2417.3	1876.5	1392.3	1887.0					
G61.0	1481.4	2043.7	1543.3	1017.1	1481.4					
G62.0	1146.0	1702.6	1220.4	765.6	1146.0					
G63.0	869.4	1352.0	937.0	606.8	869.4					
G64.0	669.7	1016.6	695.9	514.6	669.7					
G65.0	538.7	769.3	547.1	451.7	538.7					
G66.0	460.1	614.2	466.9	397.2	460.1					
G67.0	402.5	507.8	402.5	357.9	402.5					
G68.0	361.0	434.4	359.0	324.9	361.0					
G69.0	326.5	386.2	322.3	293.5	326.5					
G70.0	298.7	350.6	292.4	273.0	298.7					
G71.0	277.2	314.4	268.8	255.2	277.2					
G72.0	256.8	287.2	249.4	236.3	256.8					
G73.0	237.4	267.3	232.1	218.5	237.4					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	217.5	248.4	216.4	197.6	217.5					
G75.0	195.5	231.1	194.4	178.2	195.5					
G76.0	176.6	209.6	175.6	159.8	176.6					
G77.0	155.6	188.6	157.7	139.4	155.6					
G78.0	136.3	169.8	139.9	122.1	136.3					
G79.0	118.9	149.4	123.7	106.4	118.9					
G80.0	101.1	128.9	106.4	89.1	101.1					
G81.0	85.4	111.6	92.8	73.4	85.4					
G82.0	69.7	96.4	79.1	60.8	69.7					
G83.0	58.7	79.7	65.0	51.3	58.7					
G84.0	51.3	65.5	54.0	46.1	51.3					
G85.0	47.2	55.0	46.6	42.5	47.2					
G86.0	45.1	48.7	41.4	40.9	45.1					
G87.0	43.5	44.0	39.3	40.9	43.5					
G88.0	41.9	41.4	38.8	39.8	41.9					
G89.0	39.3	39.3	36.7	38.8	39.3					
G90.0	39.8	38.3	37.2	38.8	39.8					
G91.0	39.3	38.3	37.2	38.8	39.3					
G92.0	40.3	38.3	38.3	39.3	40.3					
G93.0	38.8	38.3	37.7	39.3	38.8					
G94.0	38.8	38.3	37.7	38.8	38.8					
G95.0	38.8	38.3	38.3	39.3	38.8					
G96.0	39.3	38.8	38.3	39.8	39.3					
G97.0	39.8	39.8	38.8	40.3	39.8					
G98.0	40.3	39.8	38.3	40.9	40.3					
G99.0	40.3	40.3	38.3	41.4	40.3					
G100.0	40.9	39.8	39.3	41.9	40.9					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:BTL

Test Type: TYPE C

Temperature:

Operator:Honor Chen

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: C