REV.	DESCRIPTION	DATE
A0	New Drawing	2009/11/18

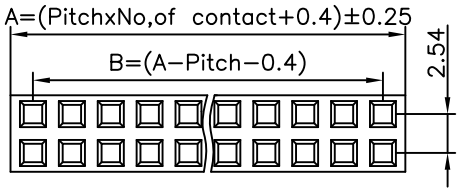

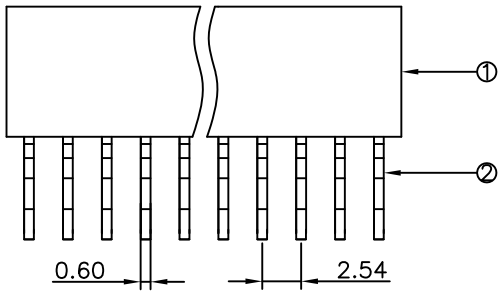

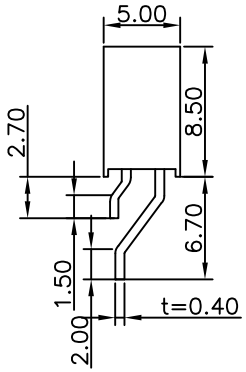

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 3.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Normal Force : 125 Grams Average . Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 1000V AC/Min .				

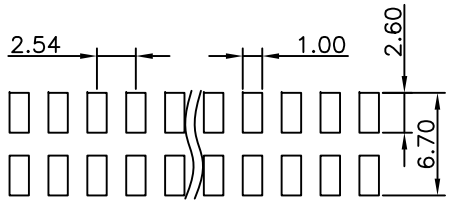

P.C.B LAYOUT

F H M D - H S X X X G 1 N B O N - G

- PCB Contact Type: H — Horziontal SMT
- Plastic Base: S — Single Base
- Number of Contact: 06 to 50 contacts
- Contact Plating: G1 Gold Flash
- Plastic Base: (H x W): N — 8.5 x 5.0mm
- Base Color: B — Black
- Without locating Peg: O — Without locating Peg
- Plastic: N — NY-6T
- Packing: G — Box

RoHS compliant

竣豪電子股份有限公司 **Superior Tech Co., Ltd.**			General Tolerance	TITLE	Pitch 2.54mm Female Header ,Dual Row Horizontal SMT Type
			X. ± 0.5	DRAWN ZhaoXiaoLin	DATE 11-18-09' / NO. 002
			.X ± 0.3	CHECK	DATE / PART NO. FHMD-HSXXXG1NBON-G
			.XX ± 0.2		
REV. A0	UNIT mm	SCALE 2:1	.XXX ± 0.1	APPROVED	DATE / CUSTOMER NO.
			角度 ± 5°		