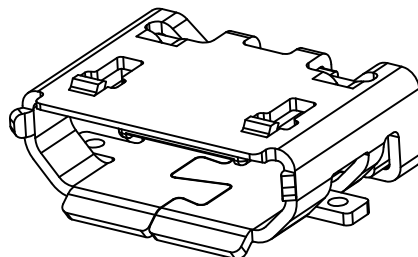
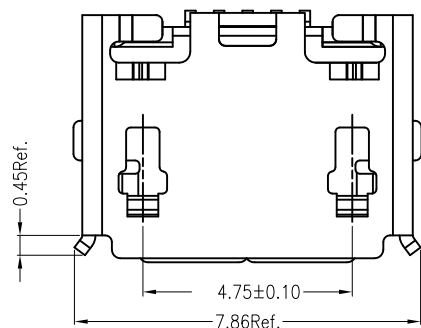







PART NUMBER

10118192-0001LF





NOTES:

1. MATERIAL:
HOUSING: HIGH THERMOPLASTIC RESIN, UL94V-0, COLOR: BLACK
TERMINAL: COPPER ALLOY
SHELL: STAINLESS
2. FINISH:
CONTACT AREA: GOLD PLATED
CONTACT SOLDER AREA: GOLD FLASH
SHELL: MATTE TIN PLATED
UNDER NICKEL PLATED ALL OVER.
3. PRODUCT SPECIFICATION: GS-12-641.
4. PACKAGING SPECIFICATION: GS-14-2180.
5. THE "LF" MEANS FOR LEAD FREE AND CAN WITHSTAND EXPOSE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN IR REFLOW PROCESS.

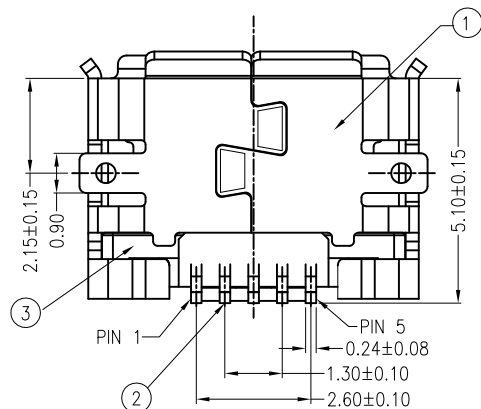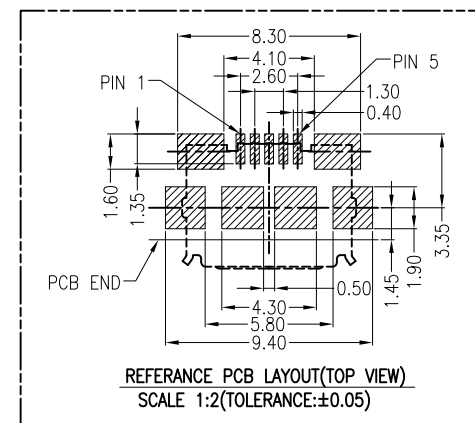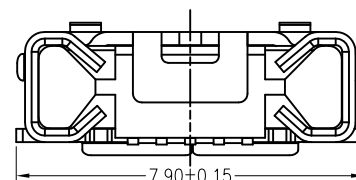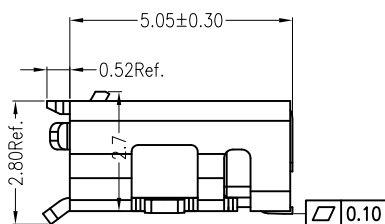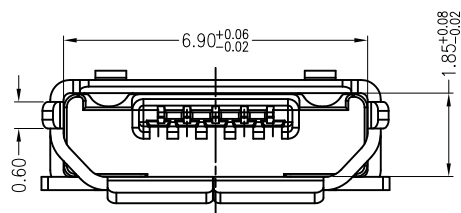

| Item | Title | Q'TY |
|------|---------------|------|
| 1 | Shell | 1 |
| 2 | Terminal | 5 |
| 3 | InsertMolding | 1 |

| | | | | | | | | | | | | | |
|-------------|--|----------------|--|-------------------------|--|-------------------------|--|-----------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|------------------|--|
| mat'l. code | | | | surface ASME Y14.5 ✓ | | tolerance ASME Y14.5 | | projection  | | product family USB | | | |
| ltr | | ecn no | | dr | | date | | tolerances unless otherwise specified | | file | | | |
| A | | | | LS | | 10/21/11 | | angles | | linear | | | |
| | | | | | | | | .X±0.38 | | MM | | | |
| | | | | | | | | .XX±0.25 | | | | | |
| | | | | | | | | X°±2° | | .XXX±0.10 | | | |
| | | | | | | | | scale | | | | | |
| | | | | | | | | dr | | JASON HSU | | 05/21/11 | |
| | | | | | | | | enrg | | JASON HSU | | 05/21/11 | |
| | | | | | | | | chr | | JASON HSU | | 05/21/11 | |
| | | | | | | | | appd | | GARY HSIEH | | 05/21/11 | |
| | | | | | | | | | |  | | | |
| | | | | | | | | | | dwg no | | sheet 1 of 1 | |
| | | | | | | | | | | | | 10118192 | |
| | | | | | | | | | | | | A | |
| | | | | | | | | | | | | type | |
| | | | | | | | | | | | | CUSTOMER Drawing | |
| sheet index | | revision sheet | | A 1 | | | | | | | | | |