


Hardware setup and connectors

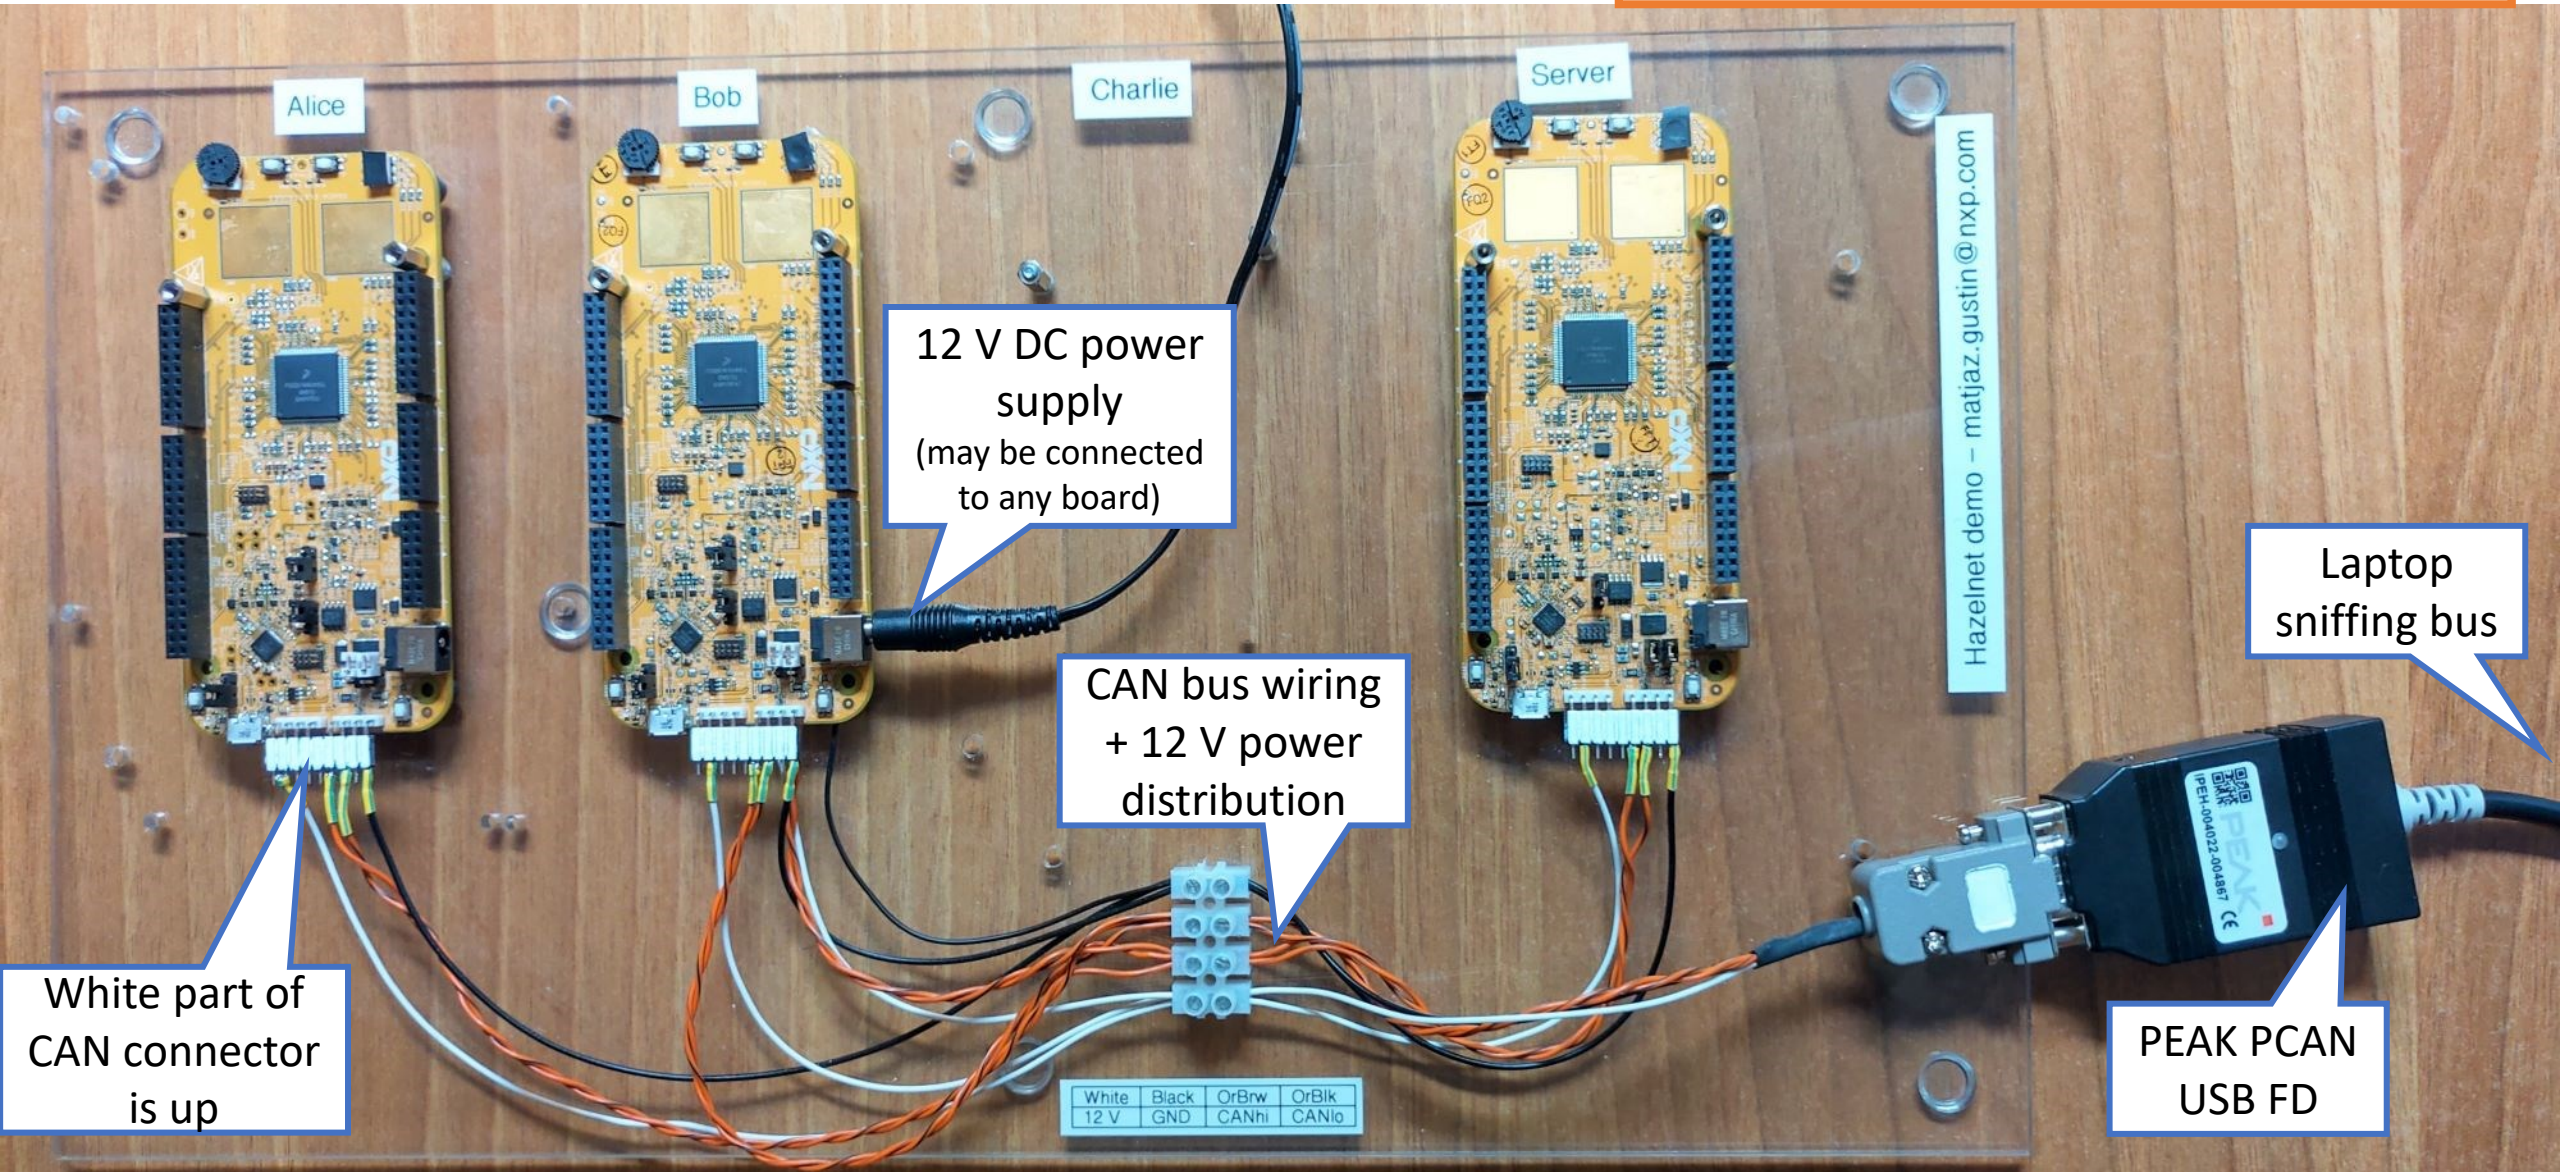


Detail of the board jumpers

J10: Not relevant.

J107: Shorted
towards **core** package

J104: Shorted
towards **microUSB**

J108+J109: 2x 60 Ohm resistors for
the CAN bus. Must be both **open**
(as on the picture) on all boards
except for one, which must short
both of them (usually the Server).

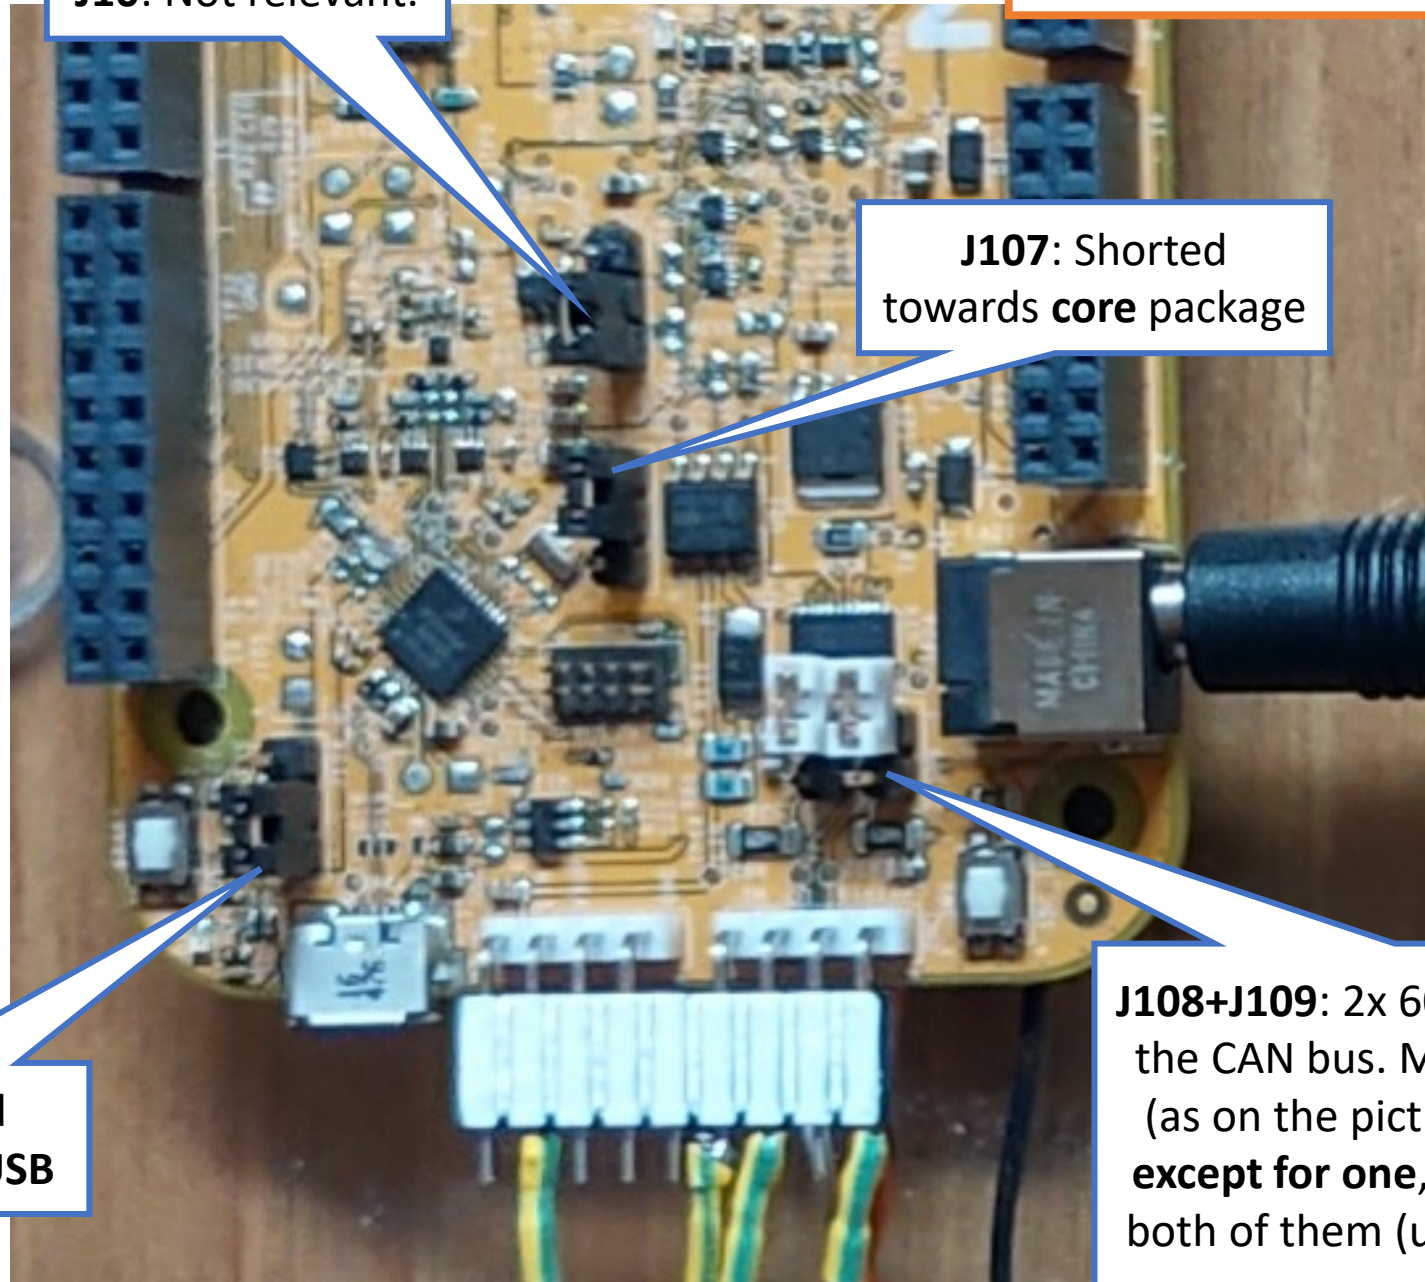

Interaction with the boards

