ARDUINO

ARDUINO UNO REV3

STORE.ARDUINO.CC/UNO-REV3

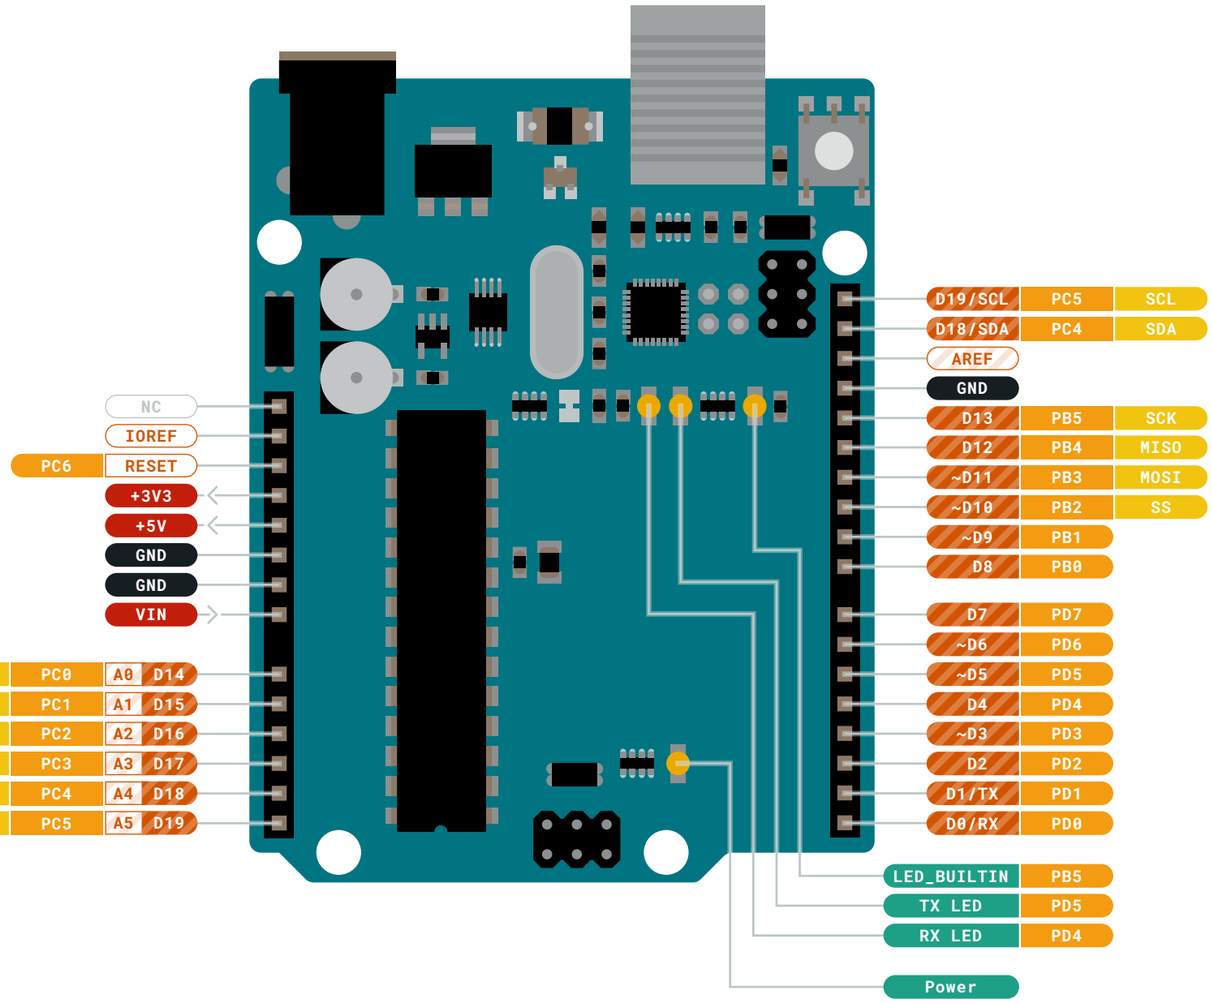

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default

⚠ **MAXIMUM** current per I/O pin is 20mA

⚠ **MAXIMUM** current for +3.3V pin is 50mA

VIN 6-20 V input to the board.

ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

ARDUINO

ARDUINO UNO REV3

STORE.ARDUINO.CC/UNO-REV3

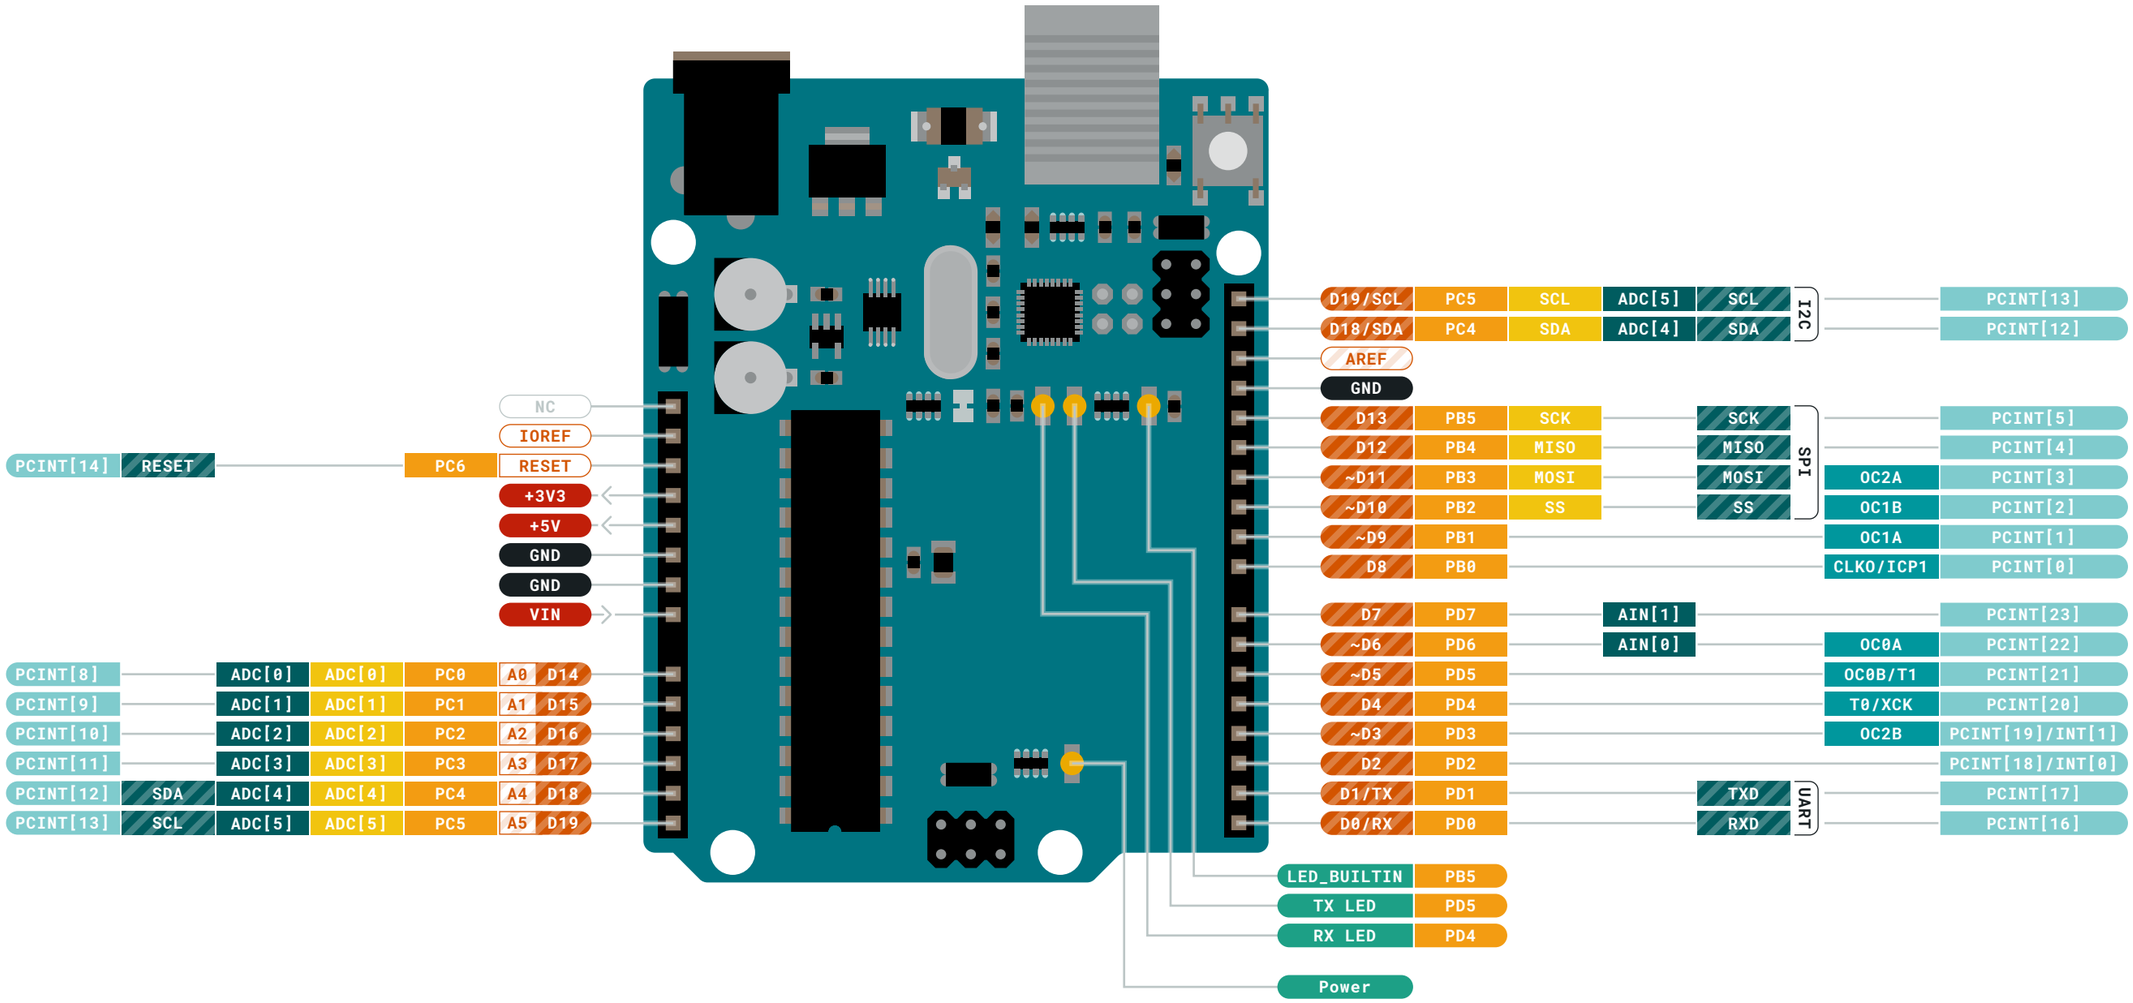

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom

⚠ **MAXIMUM** current per I/O pin is 20mA

⚠ **MAXIMUM** current for +3.3V pin is 50mA

VIN 6-20 V input to the board.

ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

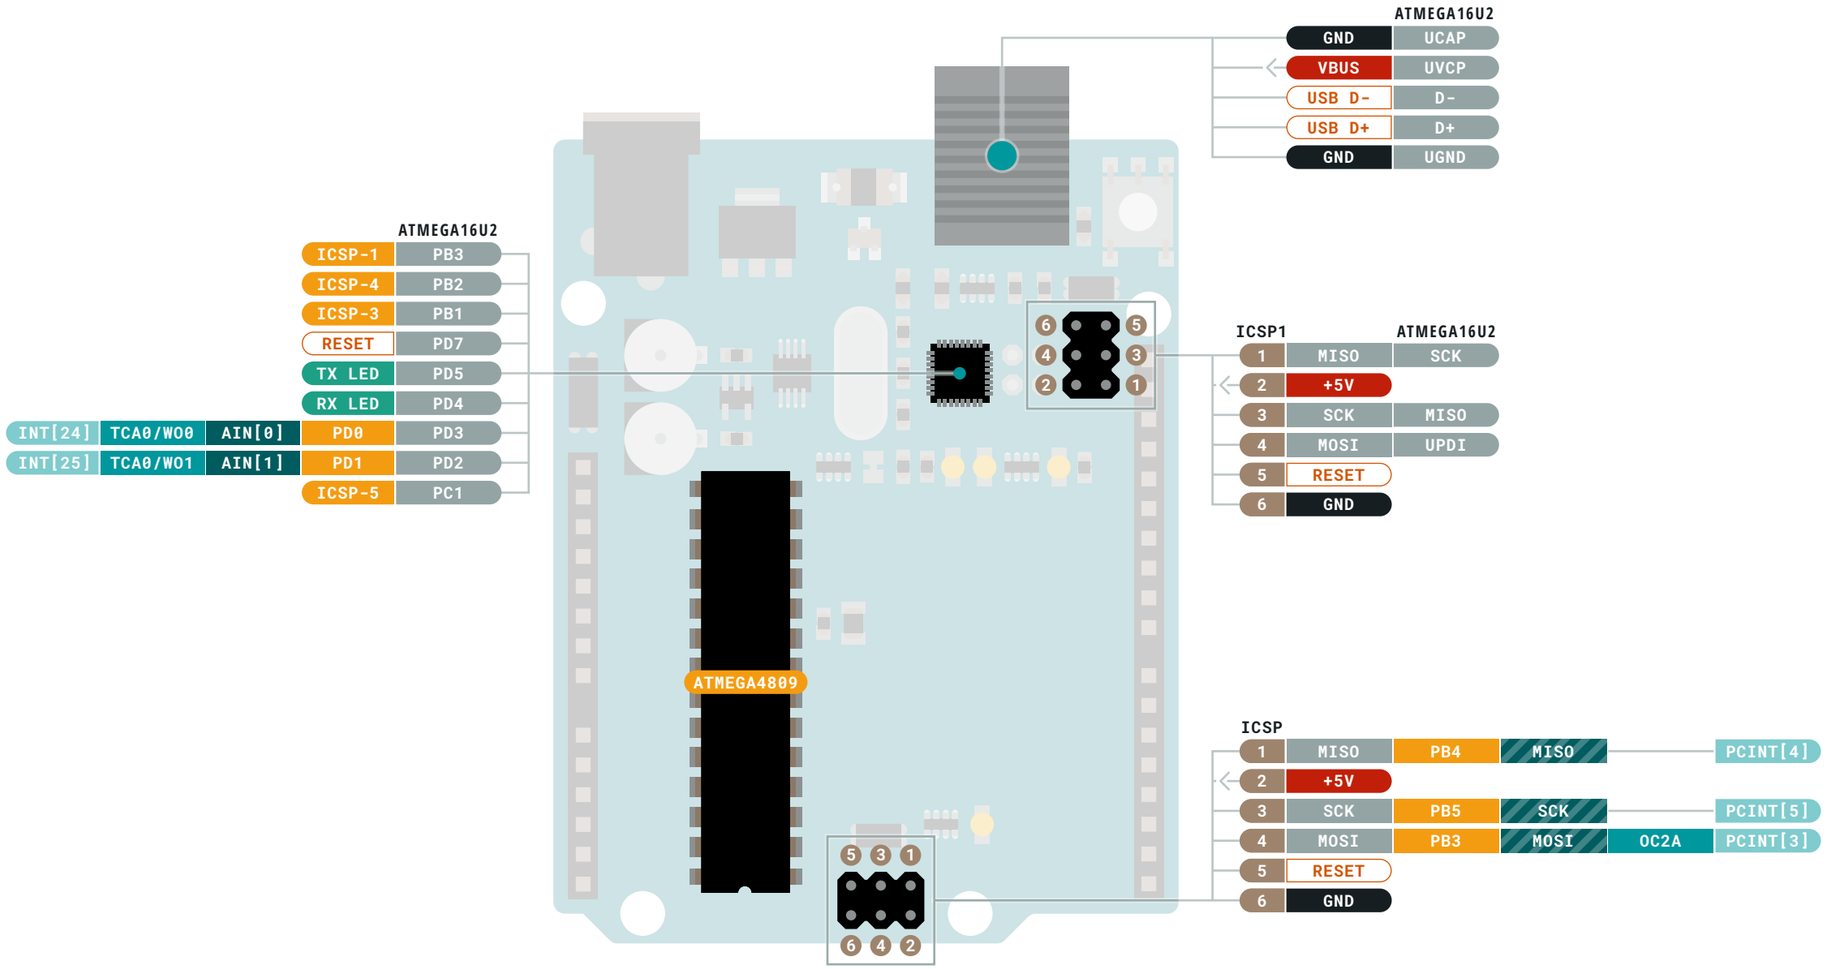

Ground
Power
LED
Internal Pin
SWD Pin

Digital Pin
Analog Pin
Other Pin
Microcontroller's Port
Default

Analog
Communication
Timer
Interrupt
Sercom

MAXIMUM current per I/O pin is 20mA

MAXIMUM current for +3.3V pin is 50mA

VIN 6-20 V input to the board.

ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

ARDUINO
UNO REV3

STORE.ARDUINO.CC/UNO-REV3

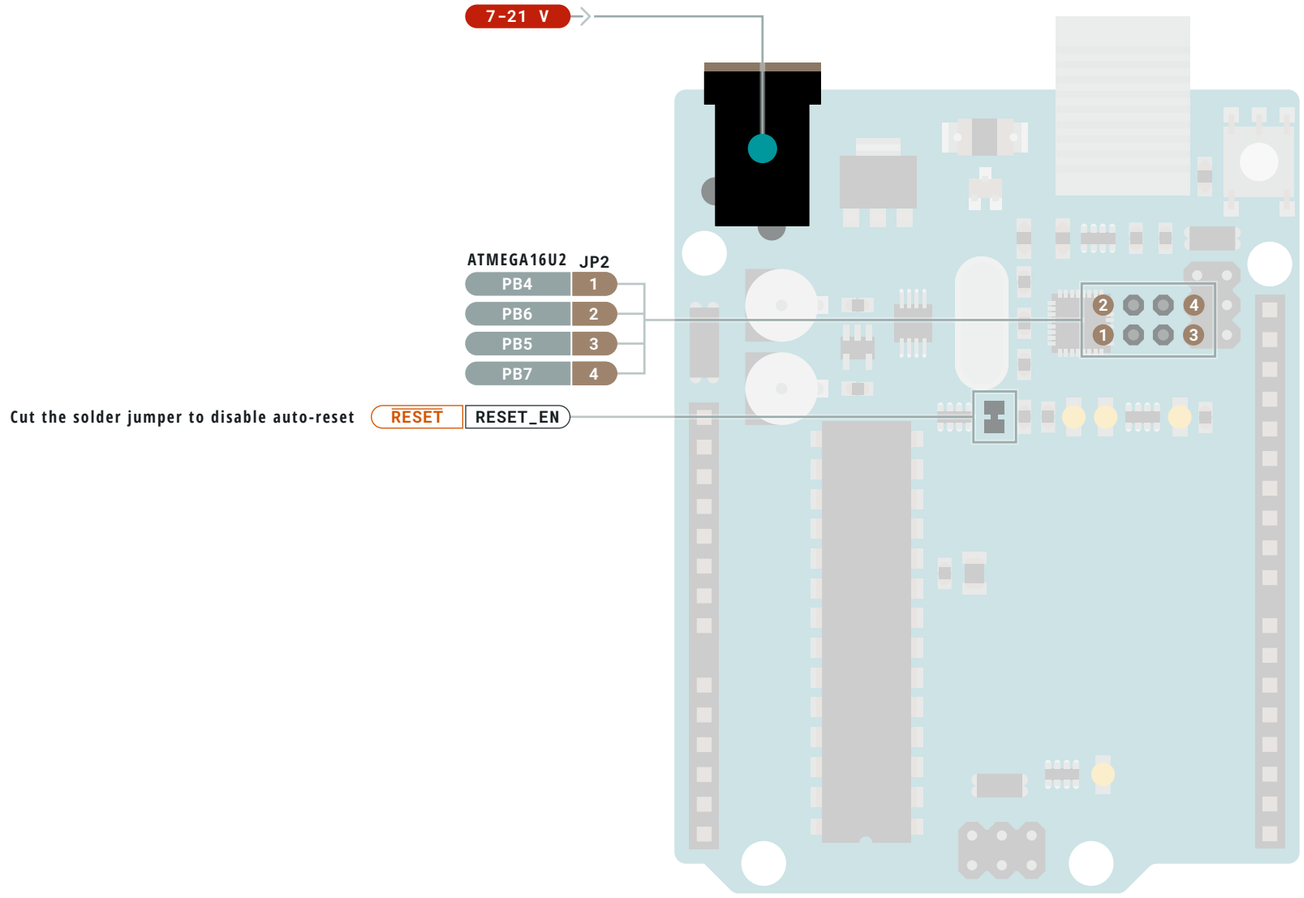

- **Ground**
- **Power**
- **LED**
- **Internal Pin**
- **SWD Pin**
- **Digital Pin**
- **Analog Pin**
- **Other Pin**
- **Microcontroller's Port**
- **Default**

SJ Pin
Making a short circuit using the solder jumper allows only the function in the SJ Pin cells.

MAXIMUM current per I/O pin is 20mA

MAXIMUM current for +3.3V pin is 50mA

VIN 6-20 V input to the board.

ARDUINO.CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/4.0/ or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.