


- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default

MAXIMUM current per I/O pin is 40mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-20 V input to the board.

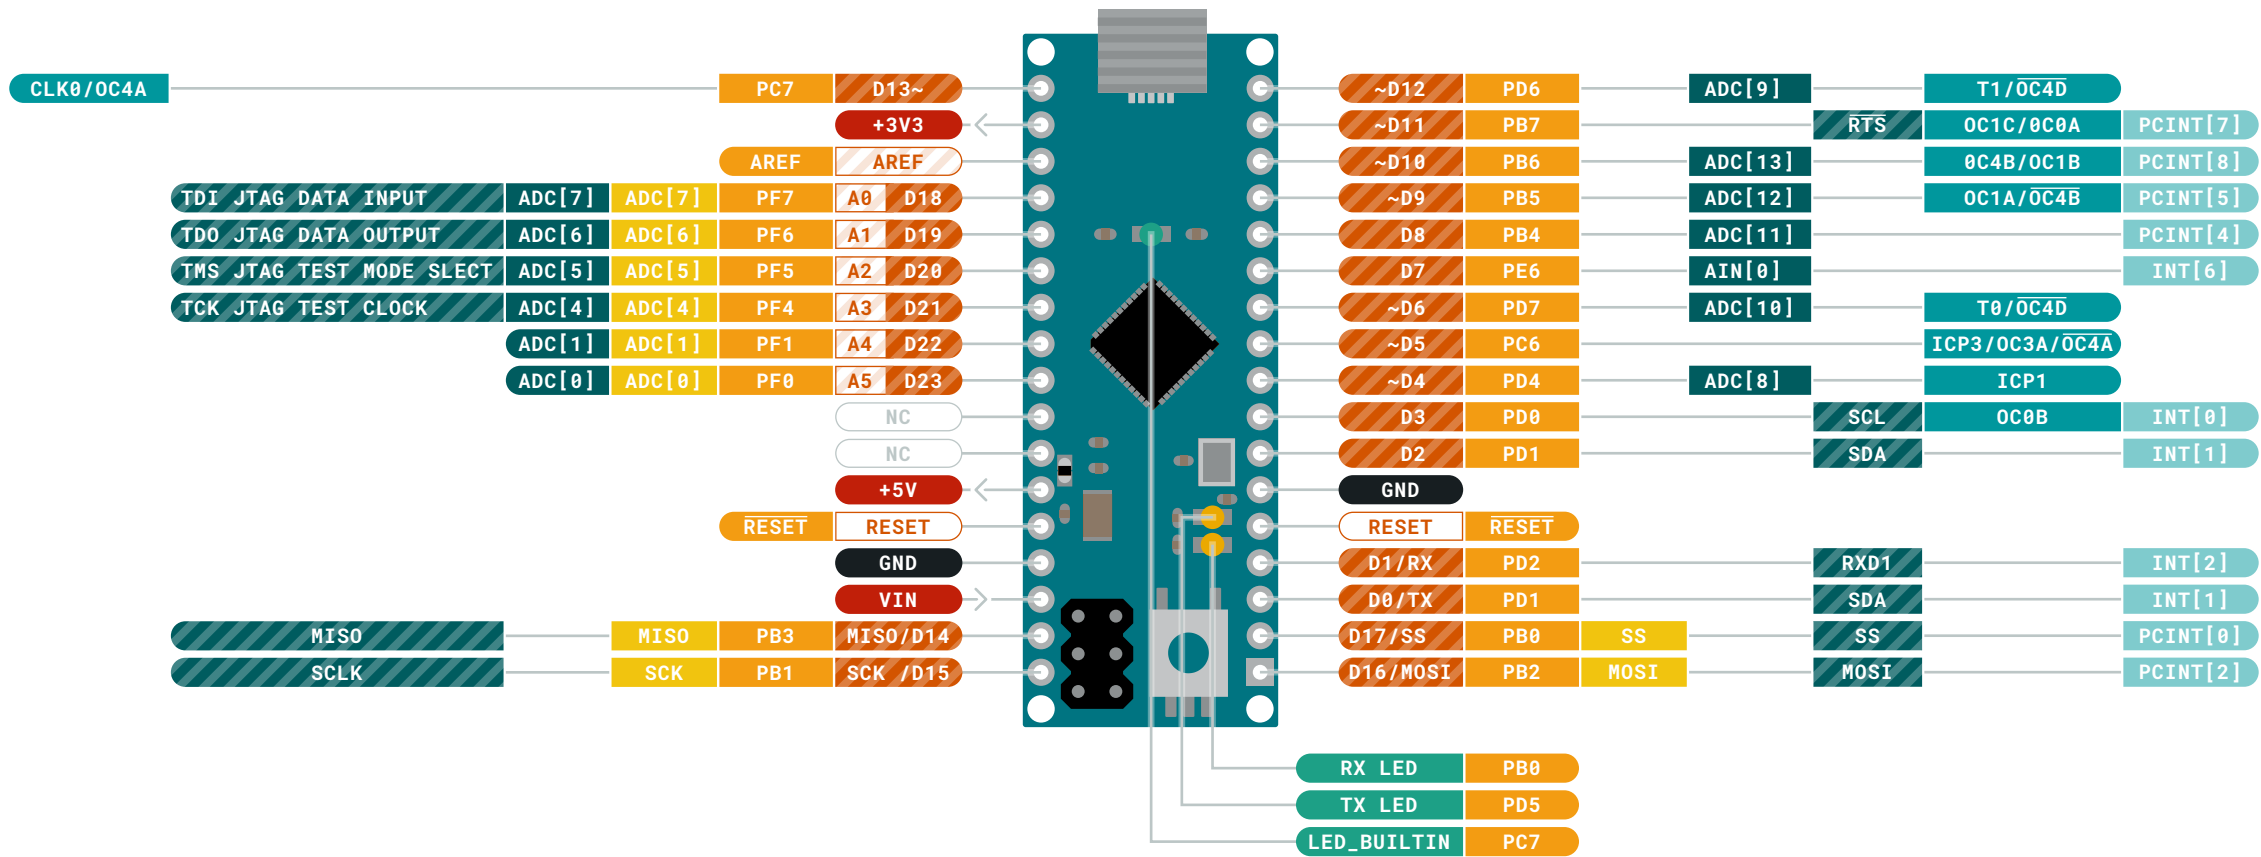


- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom

MAXIMUM current per I/O pin is 40mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-20 V input to the board.



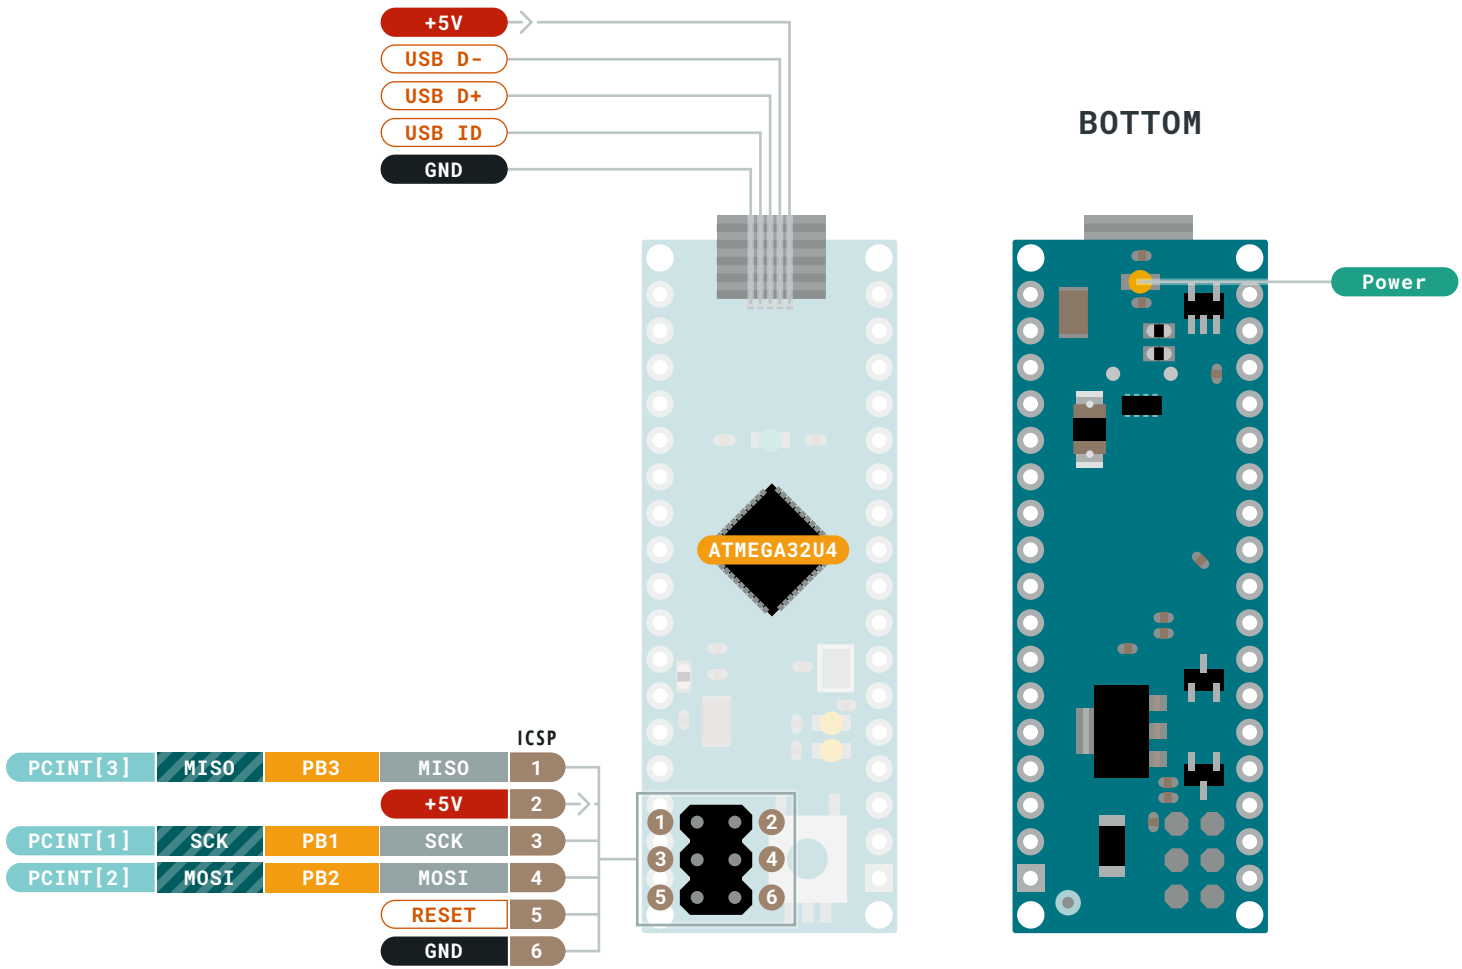

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom

MAXIMUM current per I/O pin is 40mA

MAXIMUM current per +3.3V pin is 50mA

VIN 6-20 V input to the board.