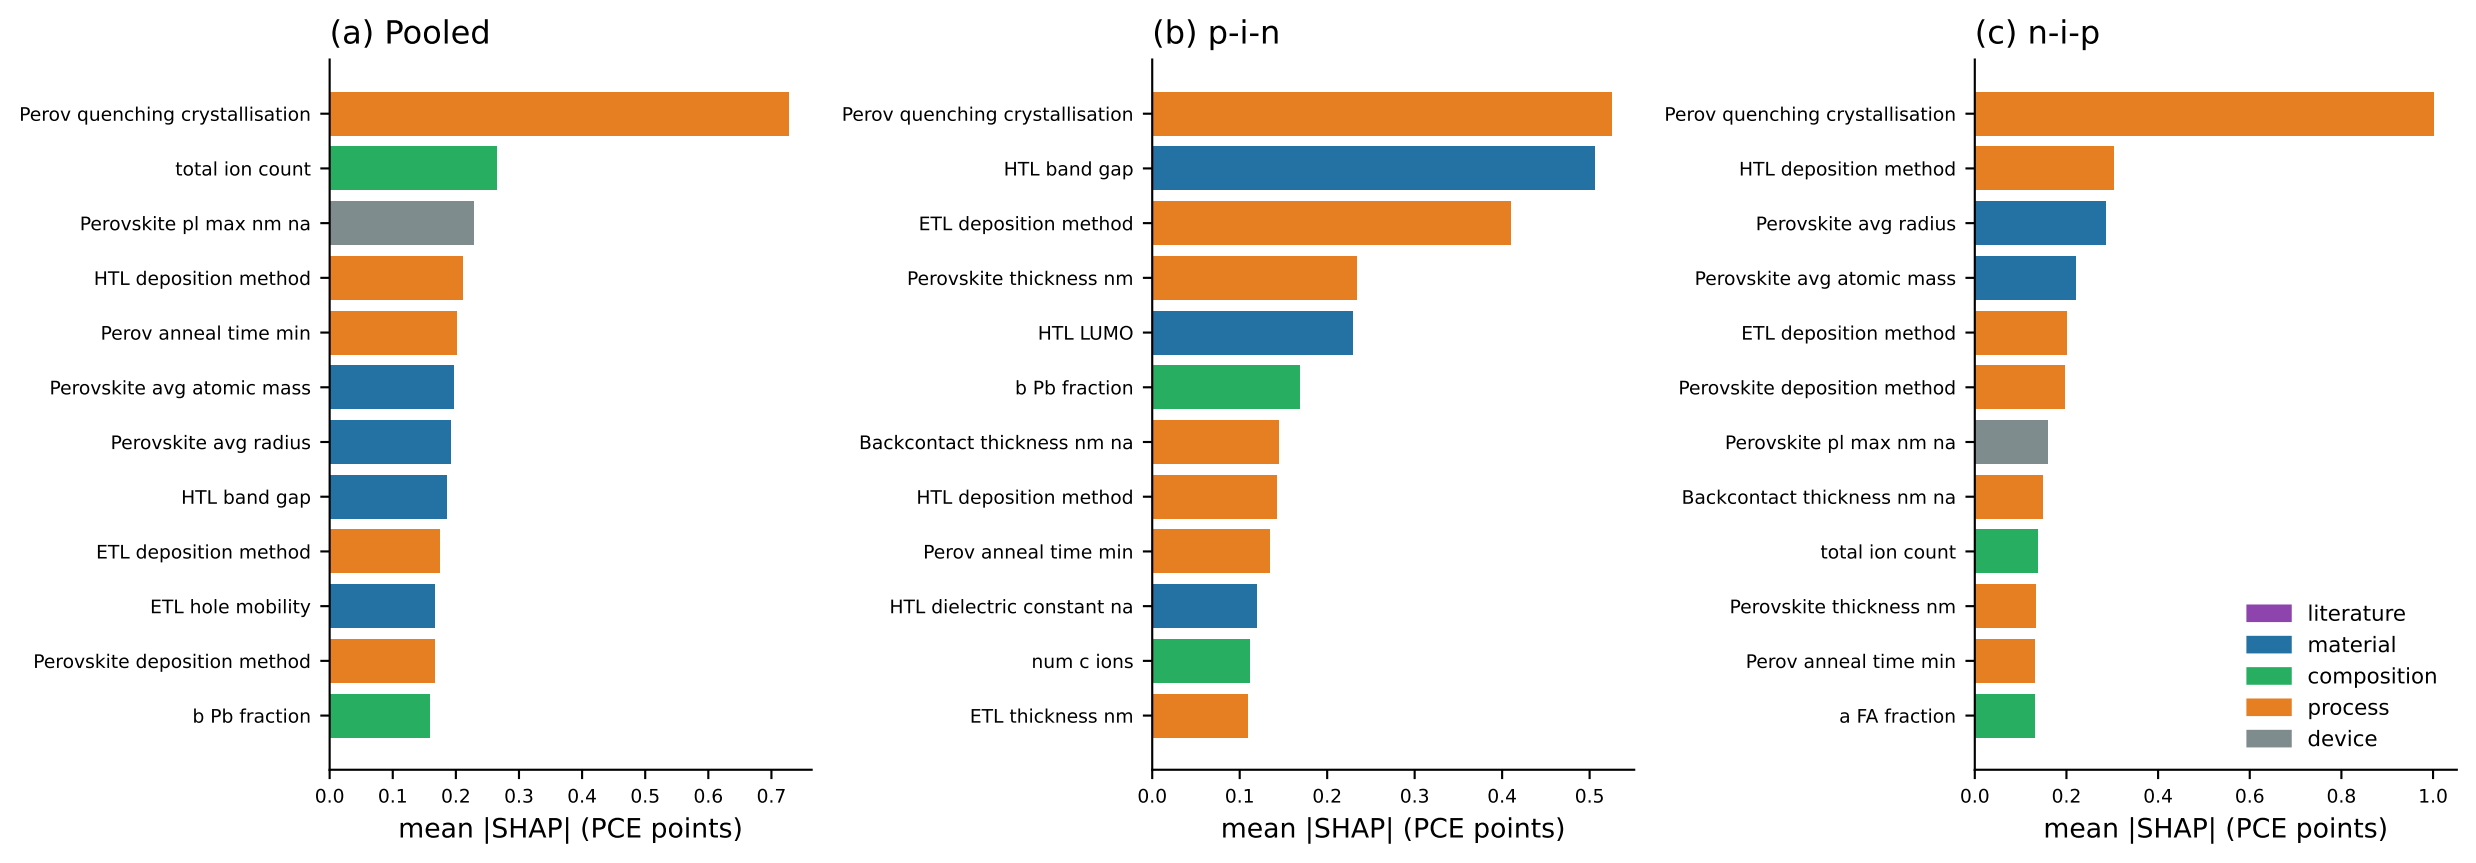
(a) Pooled
Perov quenching crystallisation
total ion count
Perovskite pl max nm na
HTL deposition method
Perov anneal time min
Perovskite avg atomic mass
Perovskite avg radius
HTL band gap
ETL deposition method
ETL hole mobility
Perovskite deposition method
b Pb fraction
0.0 0.1 0.2 0.3 0.4 0.5 0.6 0.7
mean |SHAP| (PCE points)
(b) p-i-n
Perov quenching crystallisation
HTL band gap
ETL deposition method
Perovskite thickness nm
HTL LUMO
b Pb fraction
Backcontact thickness nm na
HTL deposition method
Perov anneal time min
HTL dielectric constant na
num c ions
ETL thickness nm
0.0 0.1 0.2 0.3 0.4 0.5
mean |SHAP| (PCE points)
(c) n-i-p
Perov quenching crystallisation
HTL deposition method
Perovskite avg radius
Perovskite avg atomic mass
ETL deposition method
Perovskite deposition method
Perovskite pl max nm na
Backcontact thickness nm na
total ion count
Perovskite thickness nm
Perov anneal time min
a FA fraction
literature
material
composition
process
device
0.0 0.2 0.4 0.6 0.8 1.0
mean |SHAP| (PCE points)