30/7/26

Practical-3

Cisco Packet Tracer

AIM:

To study the packet tracer tool installation and user interface overview.

PROCEDURE:

Analyse the behaviour of network devices using CISCO PACKET TRACER simulator.


1. From network component box, click and drag-drop below components.
   a) 4 Generic PCs and one HUB
   b) 4 Generic PCs and one switch.
2. Click on connections.
   a) Click on copper straight-through cable.
   b) Select one of the PC and connect it to HUB using cable. The link LED should glow in green, indicating link is up. Connect other PCs to HUB.
   c) Similarly connect 4 PCs to switch using copper straight through cable.
3. Click on PCs connected to HUB, go to desktop. Click IP configuration, set IP, subnet mask. Default gateway and DNS server information is not needed as only 2 end devices in network.


Click on the PDU (message icon) from common tool bar - drag and drop it on PC (source machine) and drop it on another PC (destination machine) connected to the hub.


4. Observe the flow of PDU from source PC to destination PC by selecting Realtime mode & simulation.

5. Repeat step 3 to step 5 for PCs connected to the switch.

6. Observe how hub and switch are forwarding the PDU and write conclusion about the behaviour of switch and hub.

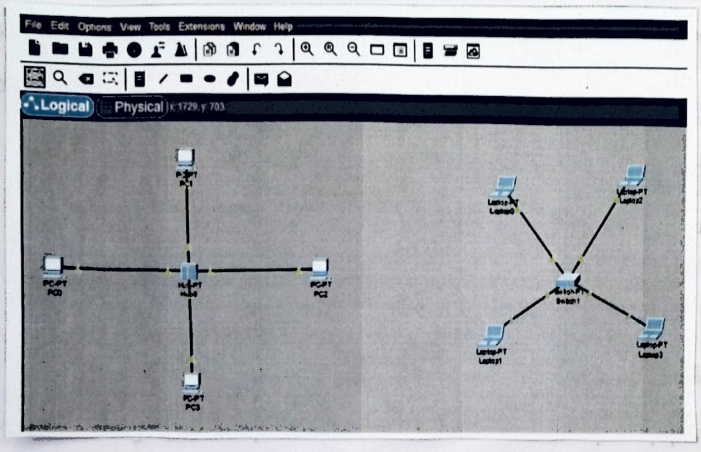

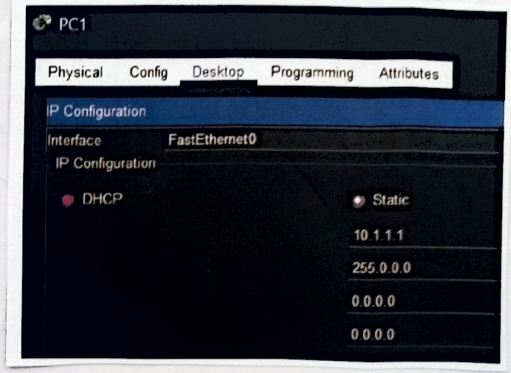

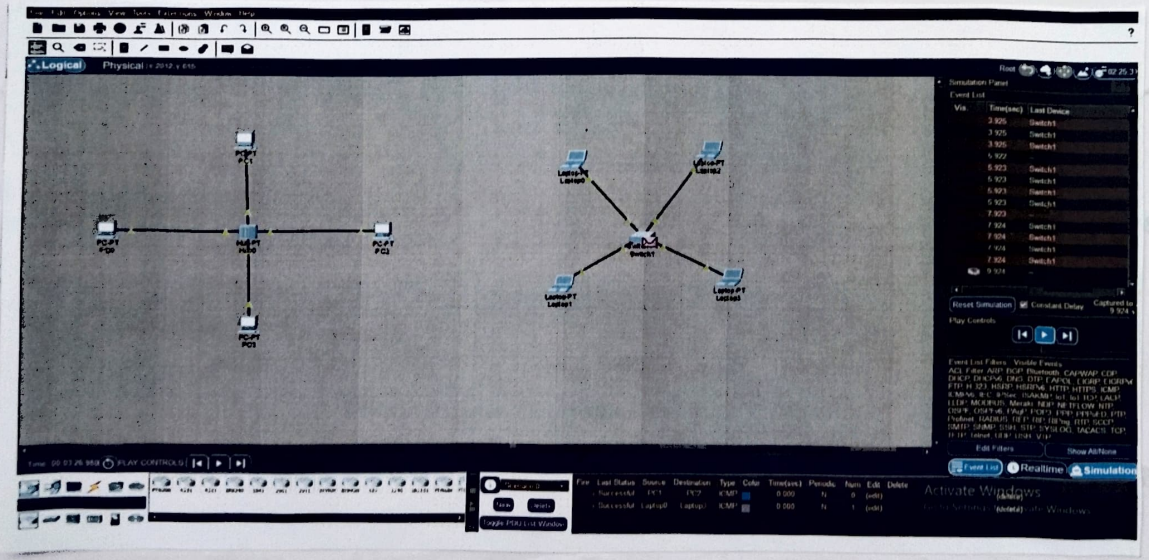

RESULT:

Thus, we have analysed behaviors of network devices using cisco packet tracer simulator.