

G5Fly



AIM+ Interference Mitigation



Reliable




Easy-to-integrate



Accurate



Septentrio
Open-Source

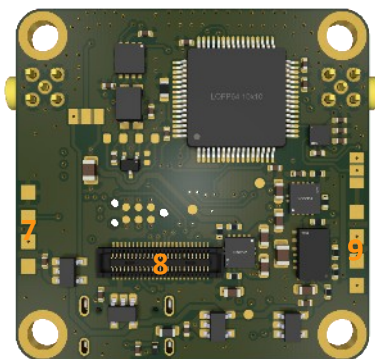


G5Fly is an open-source board design based on the “FPV flight controller” form factor (30.5 × 30.5 mm), with an extended version (30.5 × 40 mm). It is suitable for a wide range of applications including robotics, UAVs, and industrial embedded systems.


N°	Type	Device	Connectors
1	Antenna	G5 P3(H)	MMCX male plug
2	I ² C ¹	STM32(G473) [I ² C 1]	JST 4 pin
3	PPS/EVENT	G5 P3(H)	JST 3 pin / <i>DF40</i>
4	UART (RTS/CTS) G5	G5 P3(H) [UART 2 – shared with interface 8]	JST 6 pin / <i>DF40</i>
5	USB-2.0	G5 P3(H)	USB-C
6	CAN 1 ¹	STM32(G473) + Transceiver (TJA1462ATK)	x2 JST 4 pin
7	SPI ¹	Magnetometer STM (LIS2MDLTR)	x4 Solder pads
8	UART (RTS/CTS) G5 + PPS/EVENT ¹	G5 P3(H) [UART 2 – shared with interface 3 and 4]	<i>DF40 / JST 6 pin + JST 3 pin</i>
9	UART STM32 ¹	STM32(G473) [UART 2]	x4 Solder pads
*	UART G5	G5 P3(H) [UART 1] <-> STM32(G473) [USART 1]	Internal connection

¹ Optional at assembly

The board integrates the high-precision and resilient Mosaic-G5 P3(H), P6 or P8 module, delivering accurate positioning even in challenging environments. An optional dual-antenna configuration enables precise heading output.

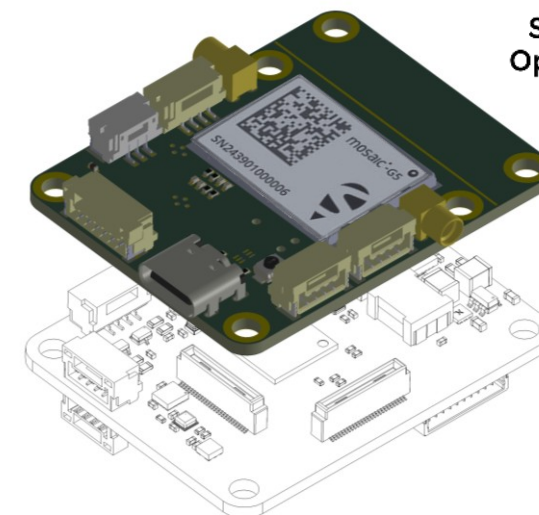

MR-MCXN-T1 Hub

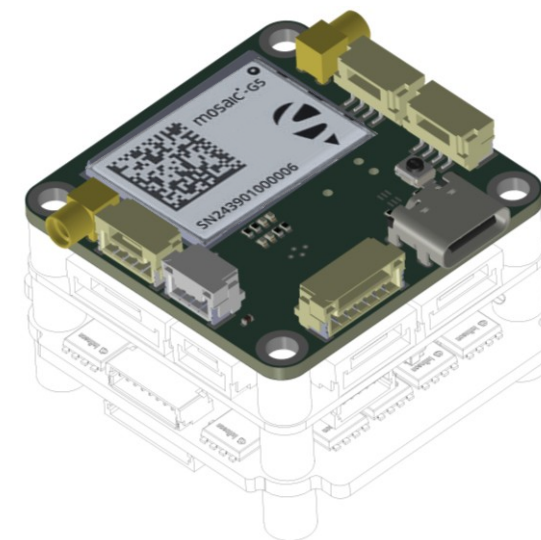

Any flight controller (30.5 x 30.5 mm)