




Nerf N-Strike Mega Cycloneshock Plunger Spring Replacement

The Nerf N-Strike Mega Cycloneshock is among...

Written By: Thomas Wong

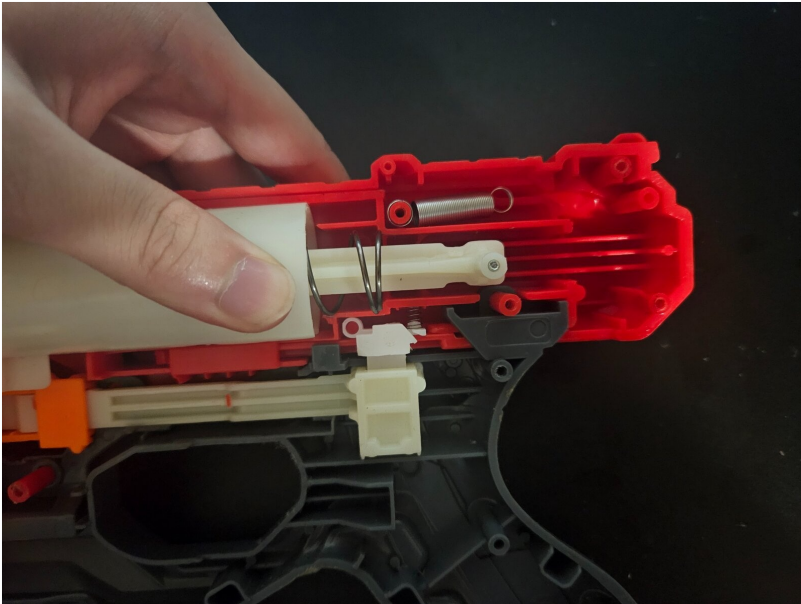

INTRODUCTION

The Nerf N-Strike Mega Cycloneshock is among the most famous Nerfs on the market. Over time, the plunger spring may weaken, reducing the blaster's performance. Replacing the plunger spring can restore or even enhance the firing power. This guide will walk you through the step-by-step process of replacing the plunger spring.

🔧 TOOLS:

Phillips #1 Screwdriver (1)
Phillips #0 Screwdriver (1)

⚙️ PARTS:

Replacement plunger spring (1)

Step 1 — Plunger Spring





- Remove all 12 screws with Phillips #1 screwdriver. Keep them in a small container to prevent loss.
- ① It is recommended to use a Phillips #0 screwdriver to remove this screw. A Phillips #1 screwdriver can be used, but it may damage the screw, and a new screw will be required.
- Carefully pry the primer off.
- ① The nerf Cycloneshock uses 8 10mm, 3 12mm, and 1 8mm screw

Step 2




- Gently pry open the shell. If it does not come off easily, double check that all screws are fully removed.

Step 3

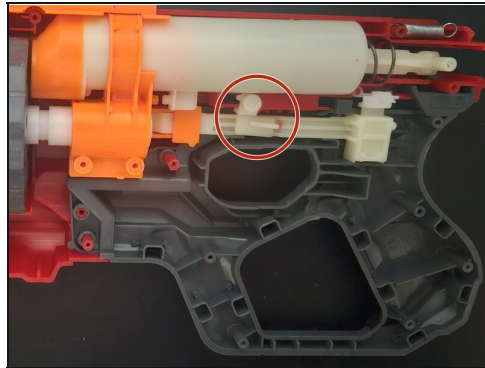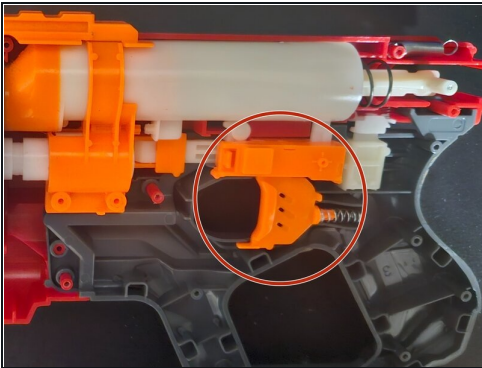



- Locate the trigger and hook, then carefully remove them.
- ① For this step you don't need screwdriver.

Step 4

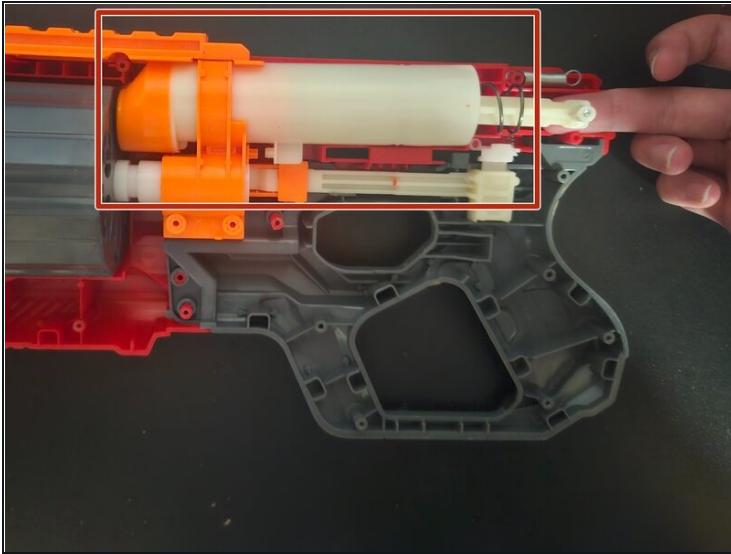


- Gently lift the plunger mechanism towards yourself, then carefully remove the plunger.

Step 5

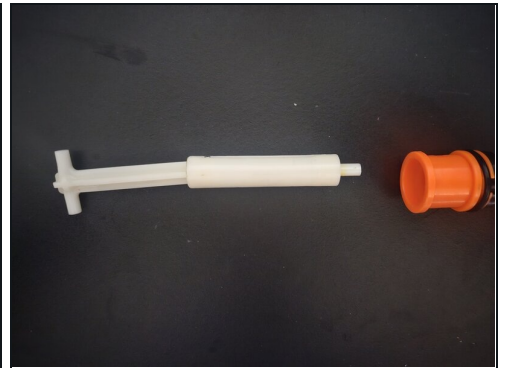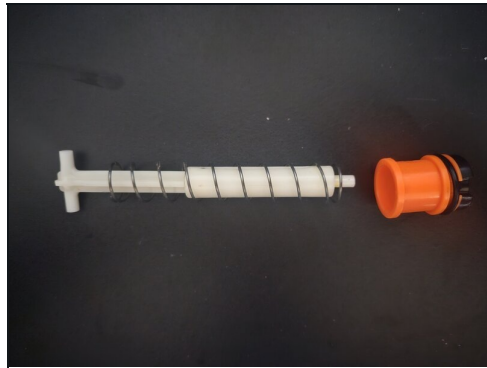


- Find the screw on the plunger.
- Use a Phillips #1 Screwdriver to unscrew it.
- Slide the old plunger spring off the plunger rod. If the spring is stuck, gently wiggle it free, and make sure you do not damage surrounding components.

Step 6

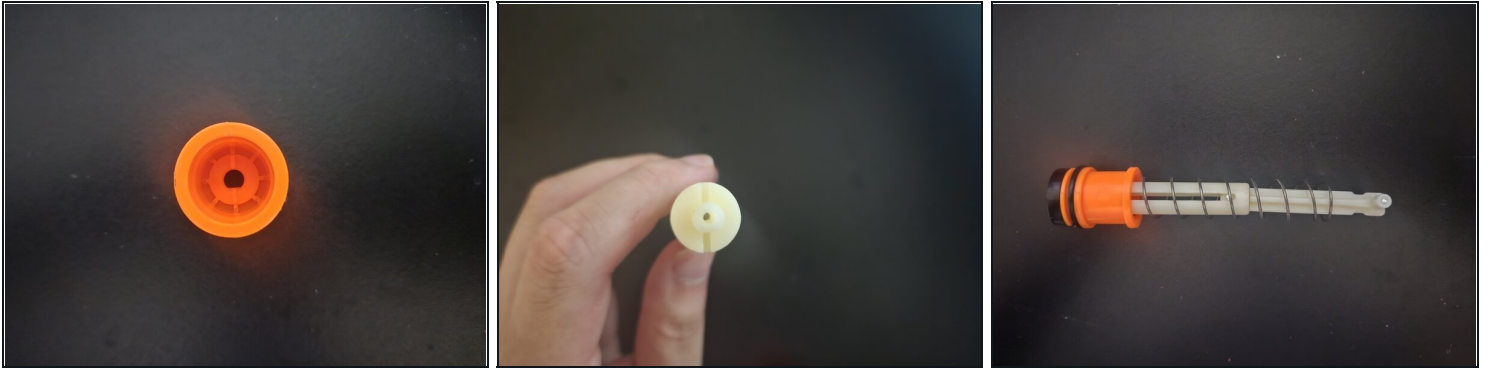

- Slide the new spring onto the plunger rod.
- Put top back on aligning grooves with plunger.
- ① Compress the spring makes it easier.

Step 7

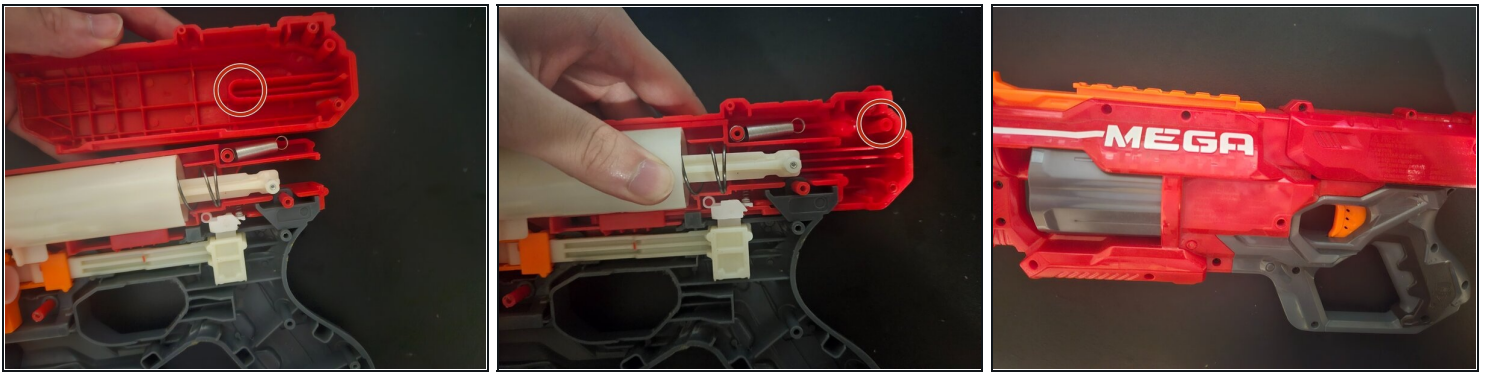

- Place the plunger assembly back in its correct position.
- Place back of plunger in groove.
- Align all internal components properly before closing the shell.
- Use a Phillips screwdriver to reinstall all screws.
- ① Load a Nerf and test fire to check functionality.

By following this guide, you have successfully replaced the plunger spring in your Nerf N-Strike Mega Cycloneshock. This simple upgrade can restore and ensure stronger and more consistent shots, and if you experience any issues, double check the alignment of internal components.