



LI-FI RECEIVER


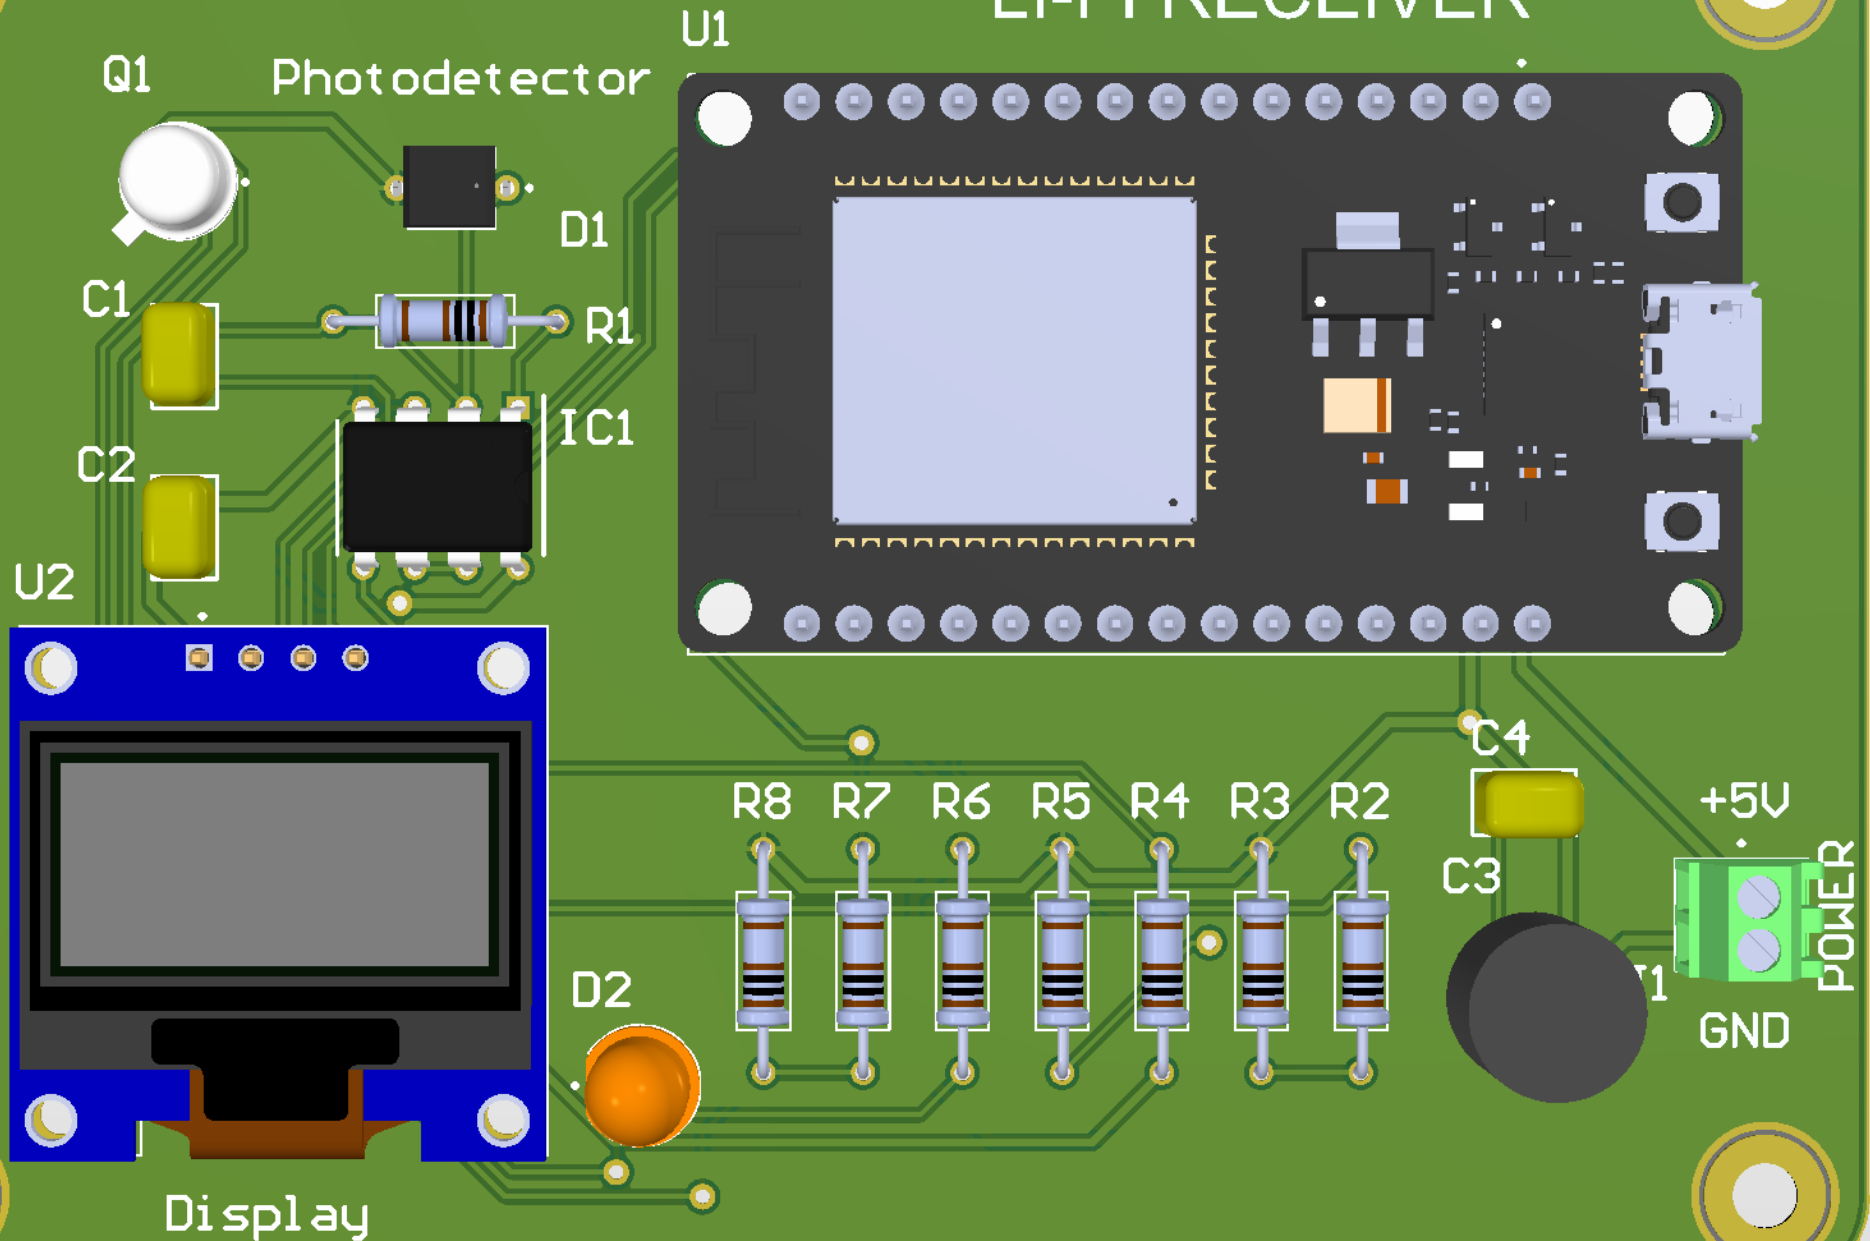


LI-FI RECEIVER

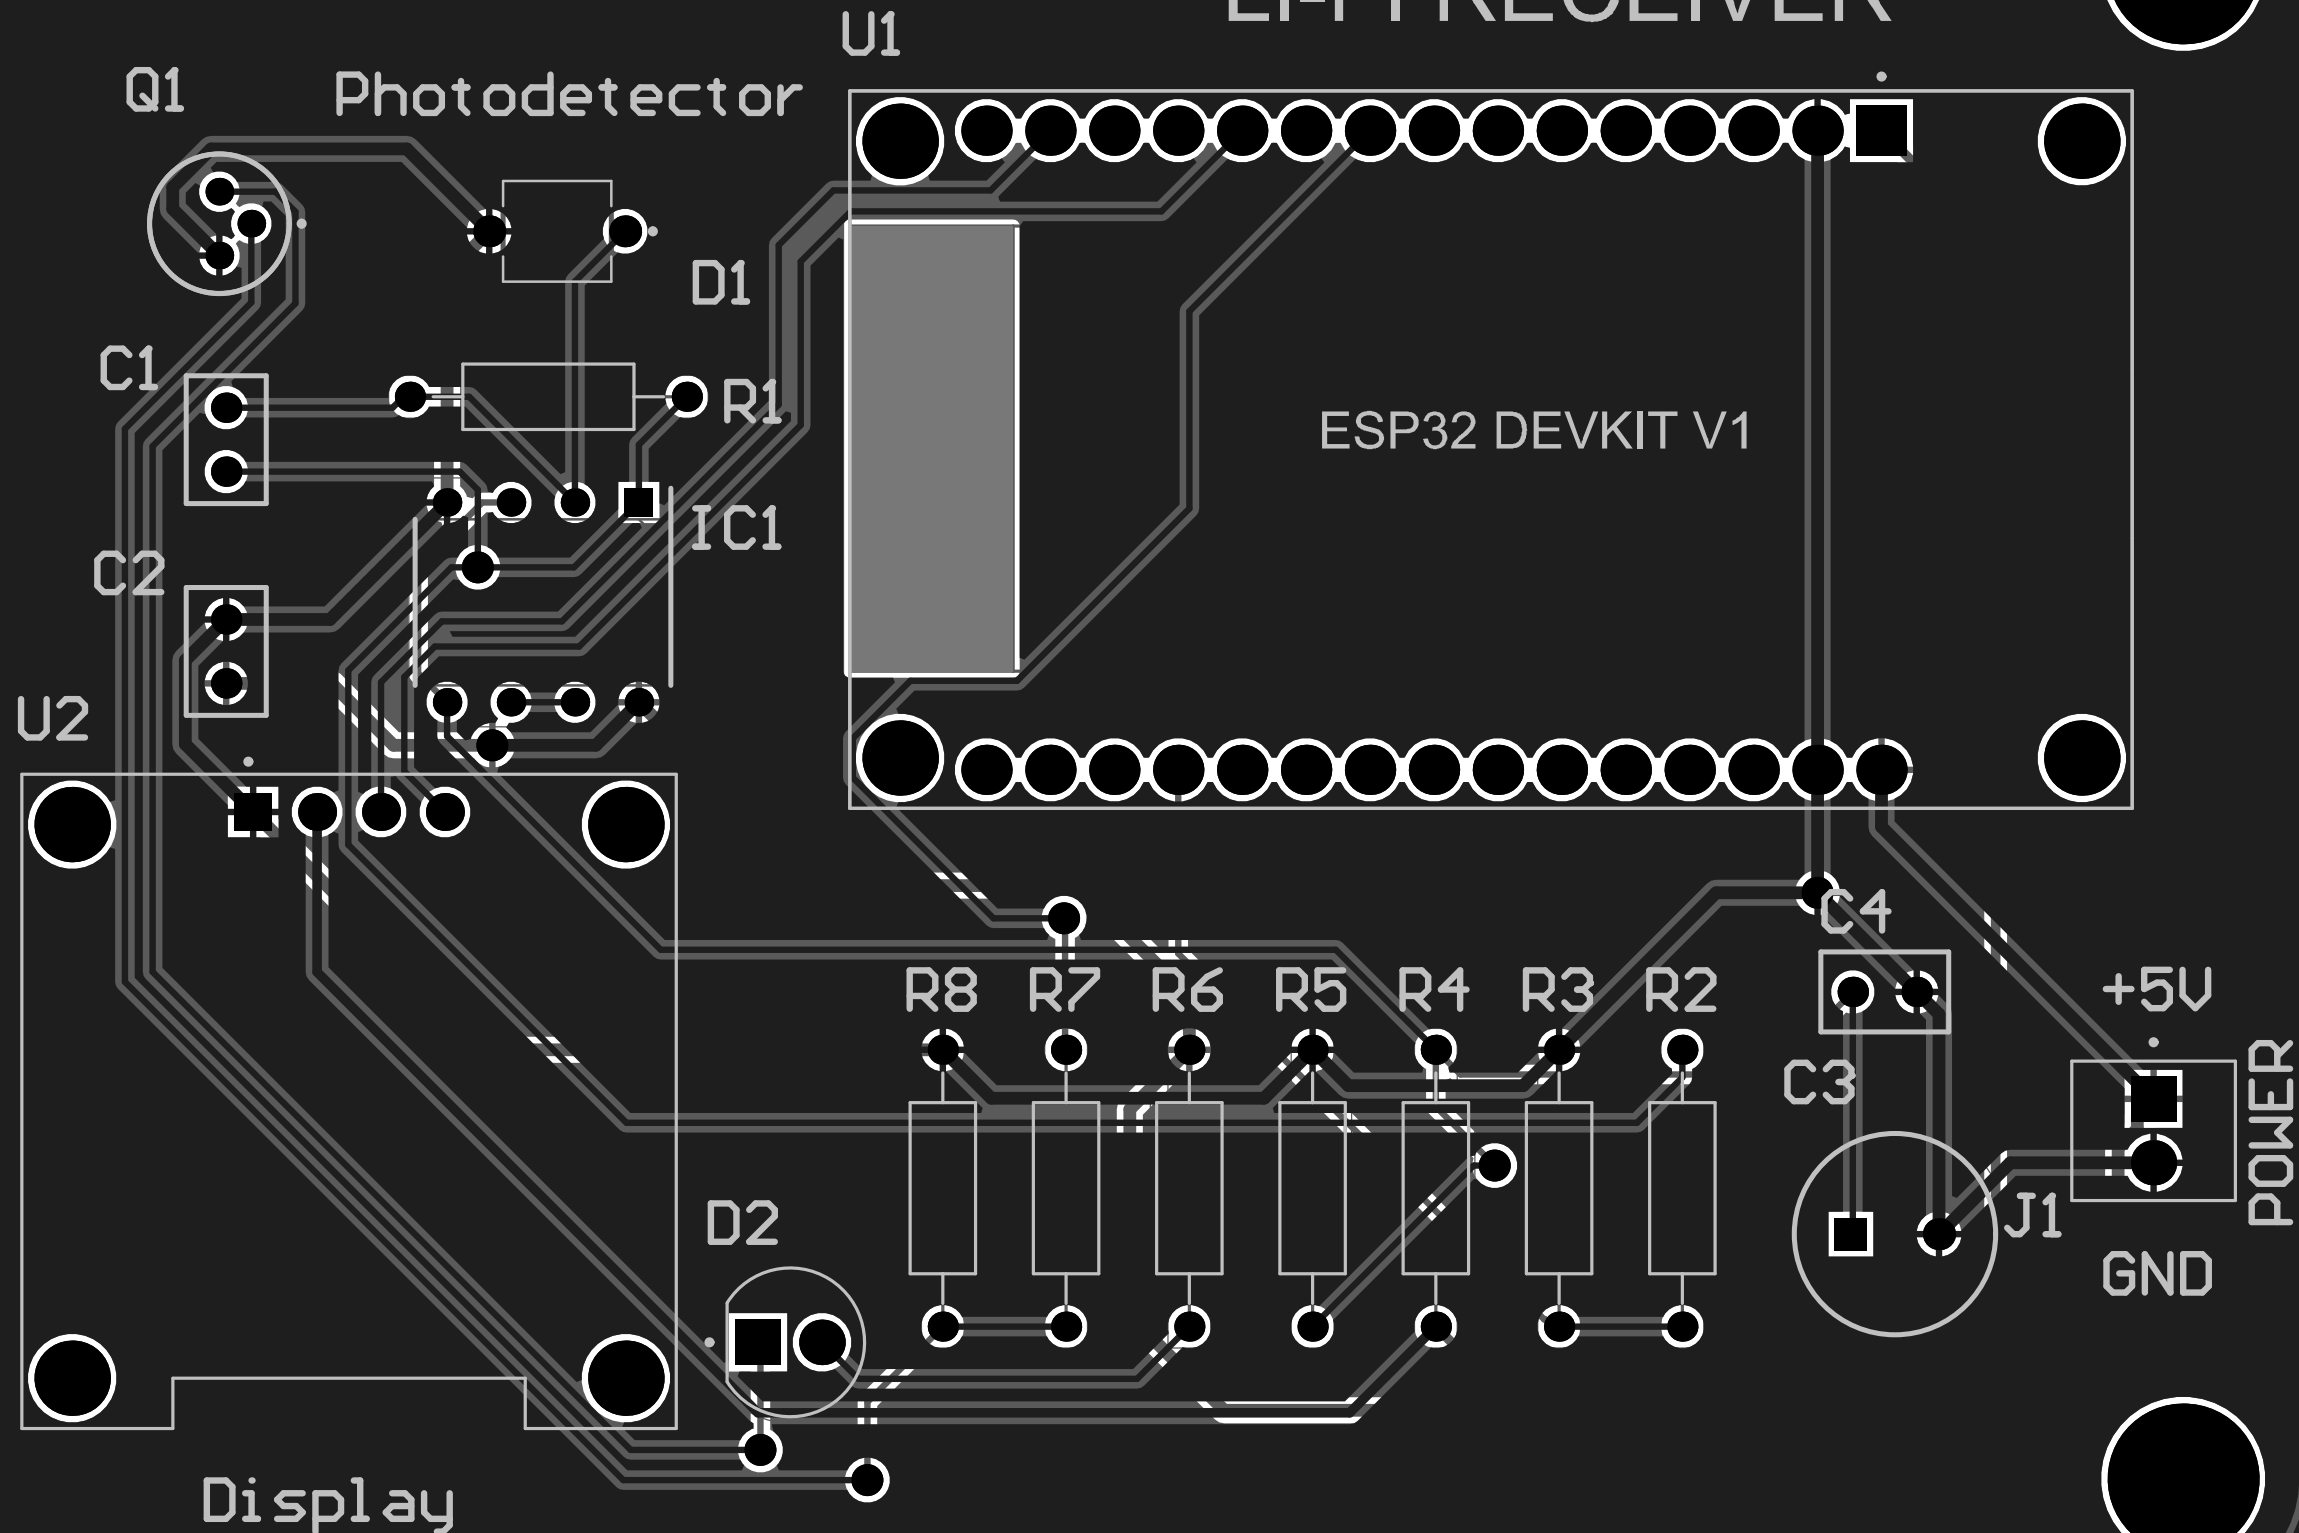


Receiver Circuit


Photodetector & LM358 Transimpedance Amplifier

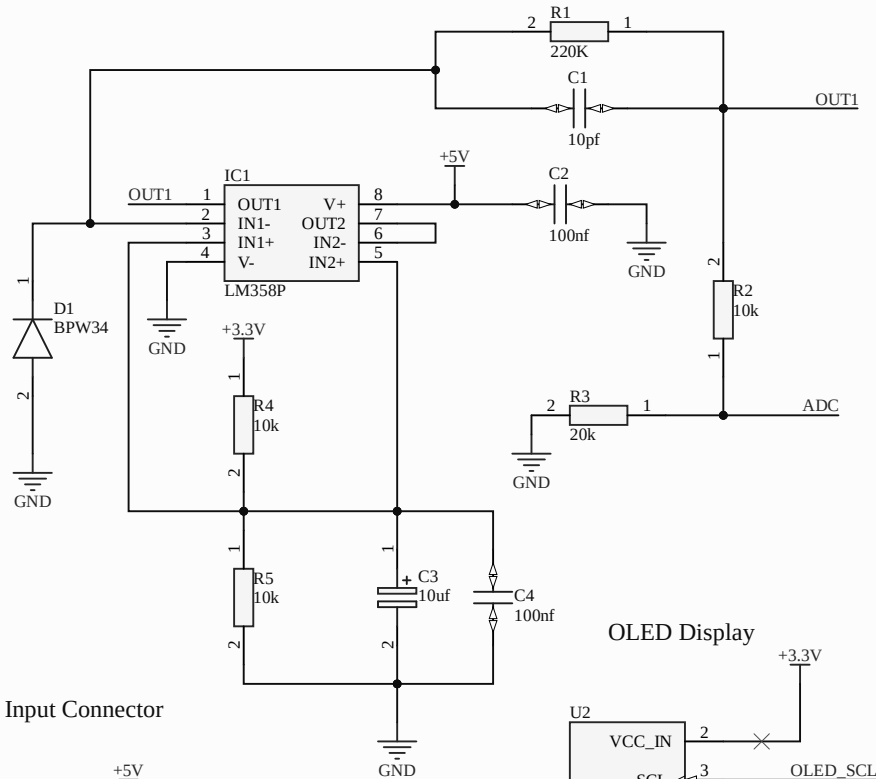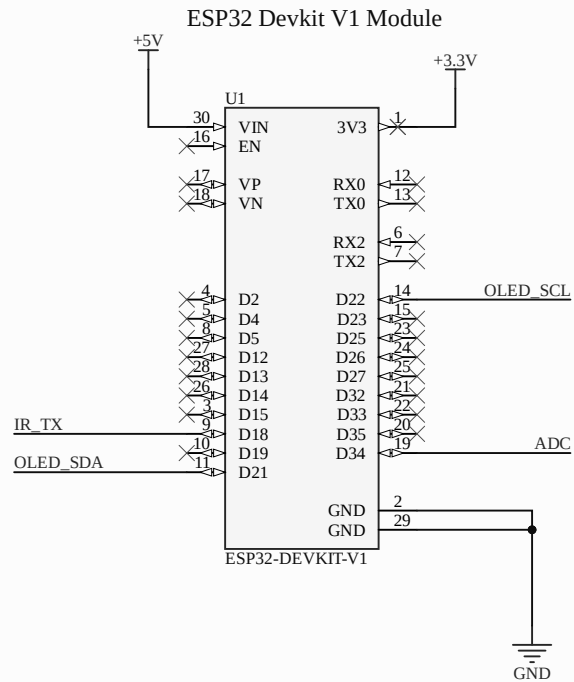


Power Input Connector



IR LED ACK Transmitter

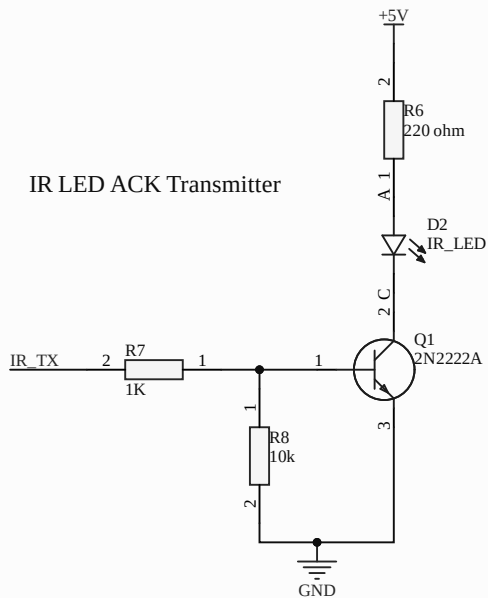



OLED Display
















Title		
Size	Number	Revision
A		
Date:	7/15/2026	Sheet of
File:	C:\Users\...\receiver.SchDoc	Drawn By:

LI-FI RECEIVER

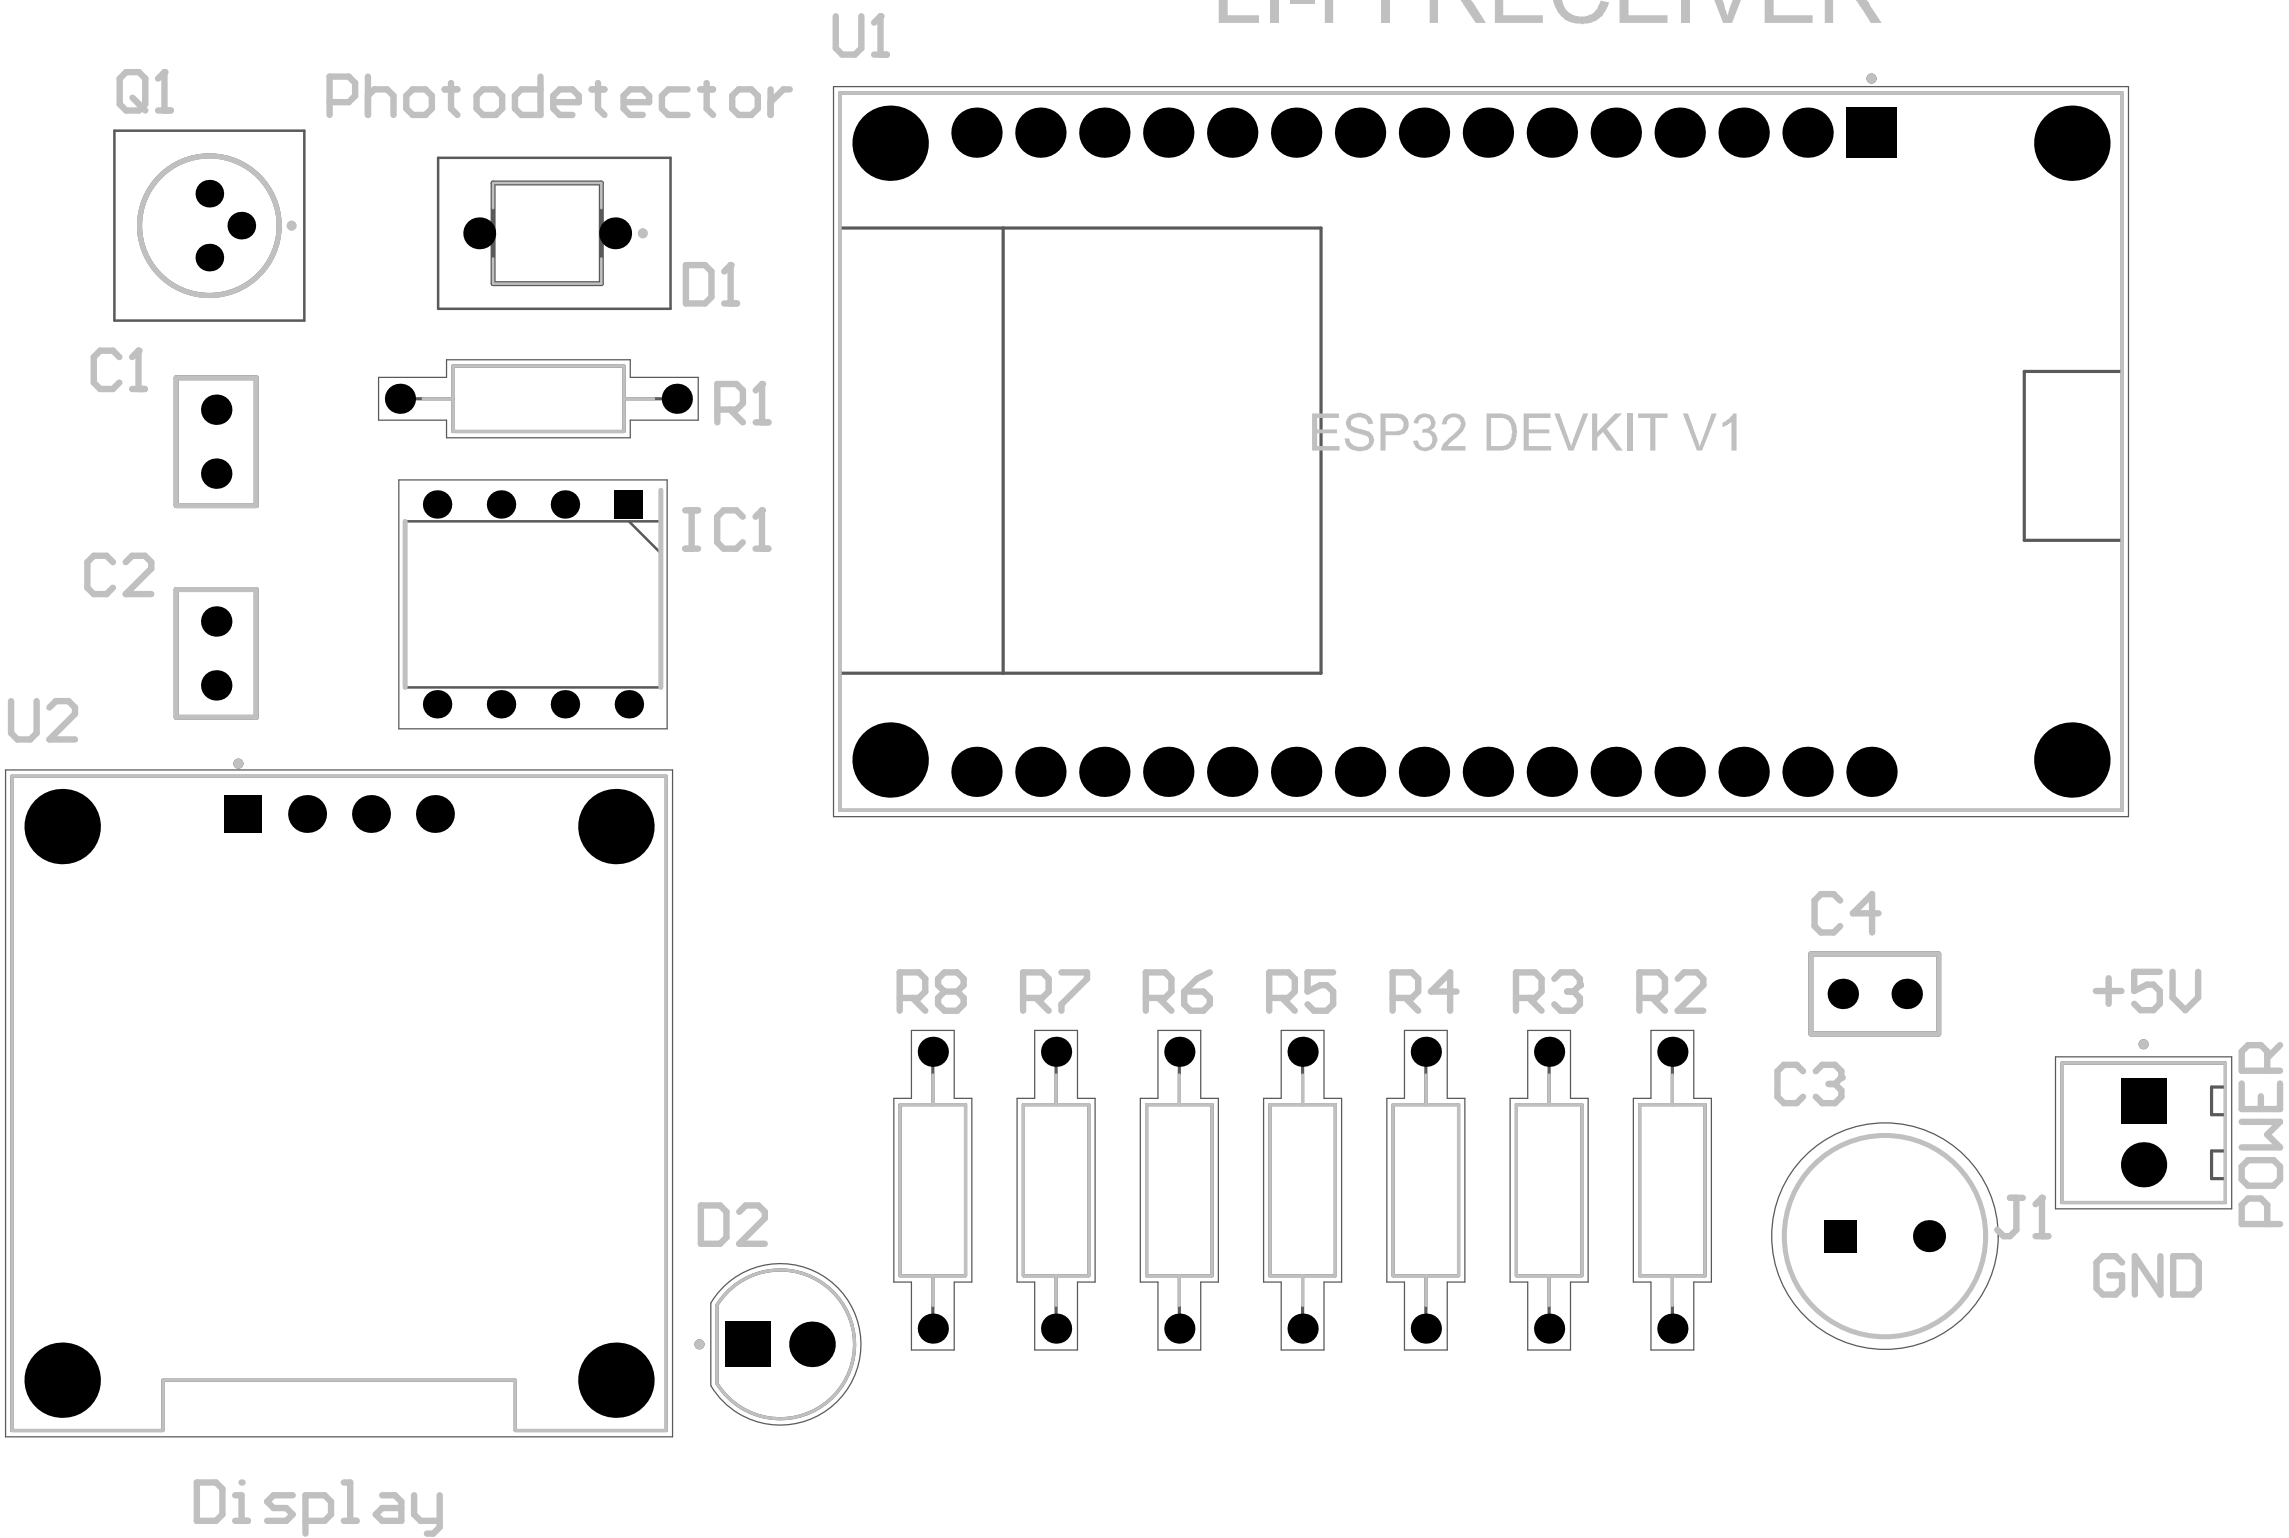

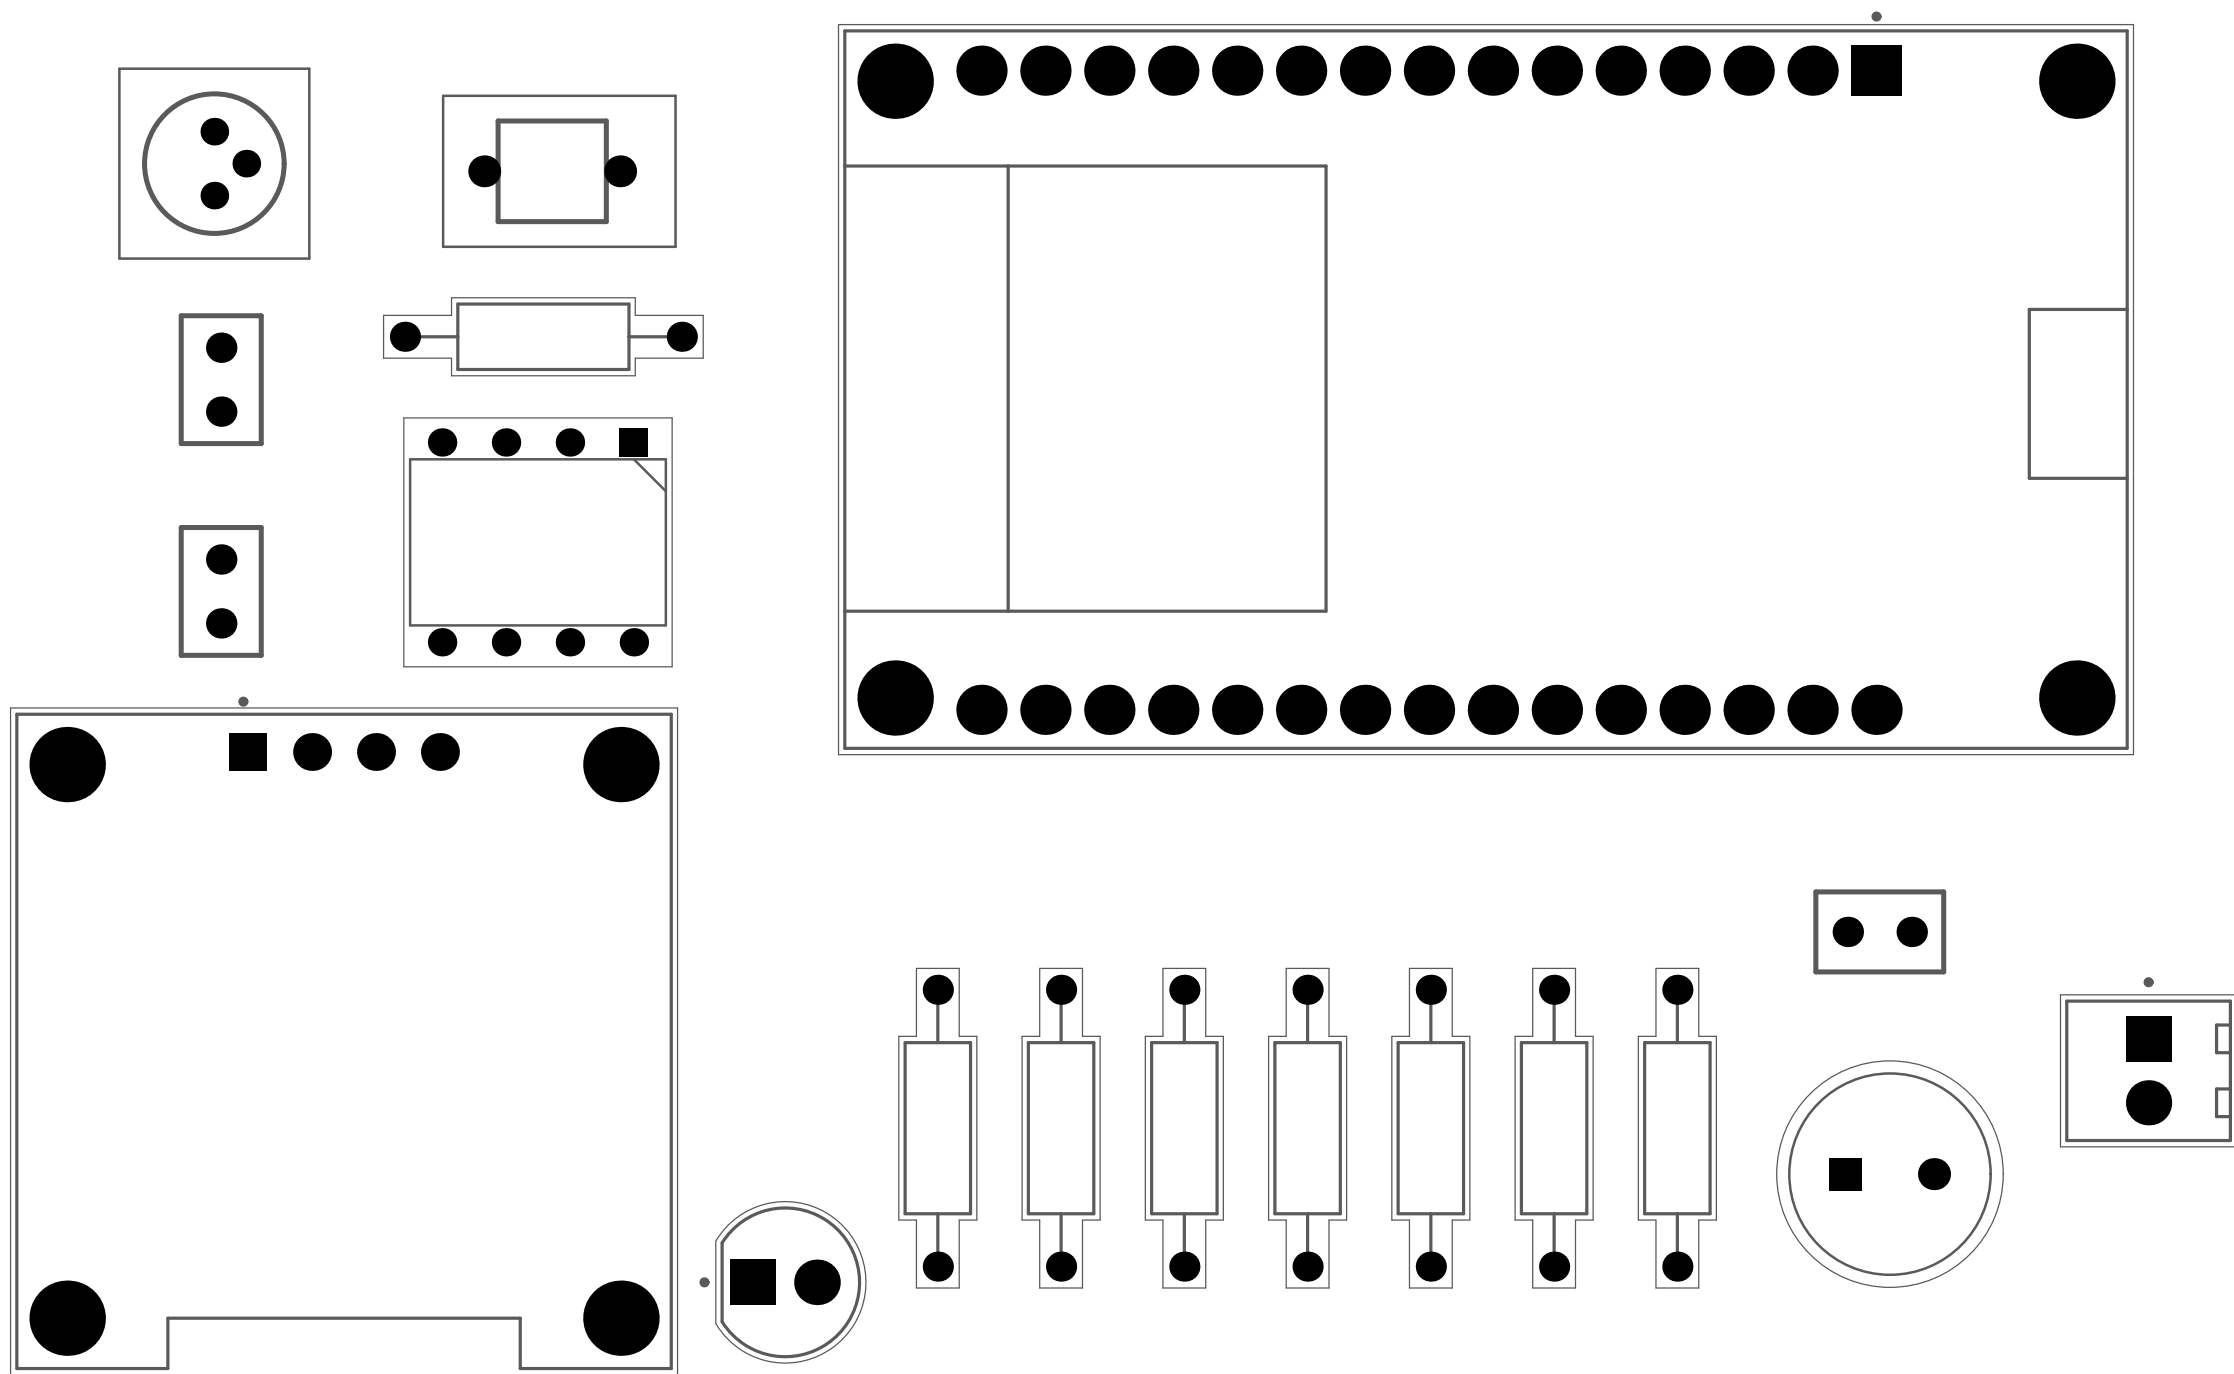

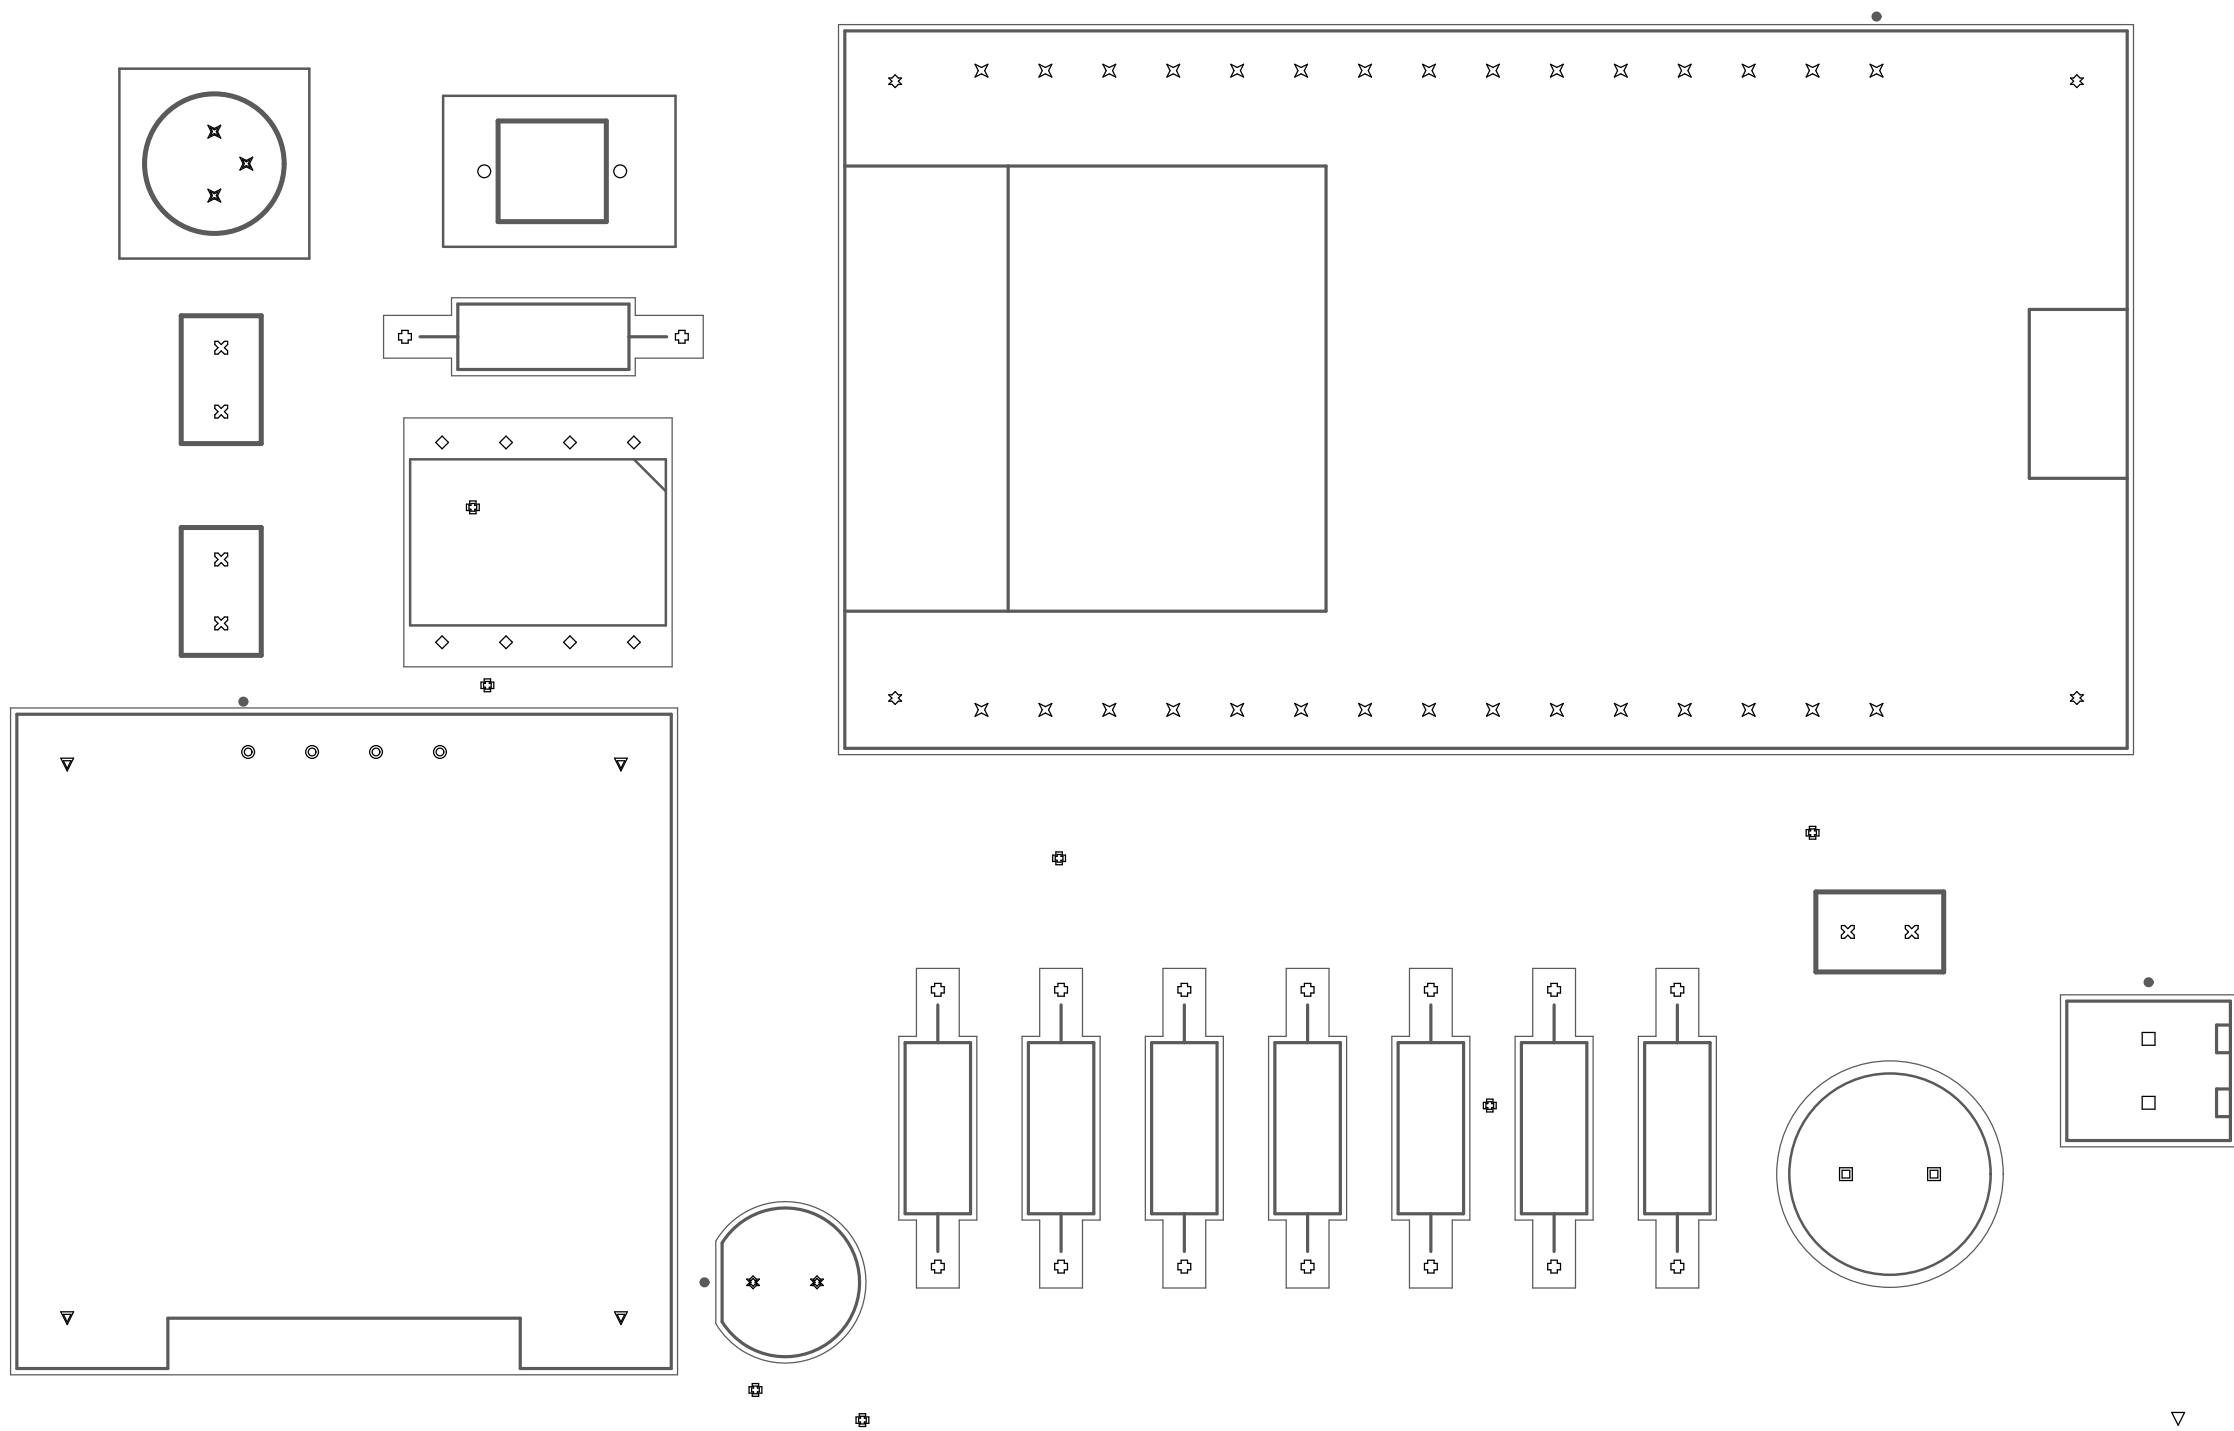

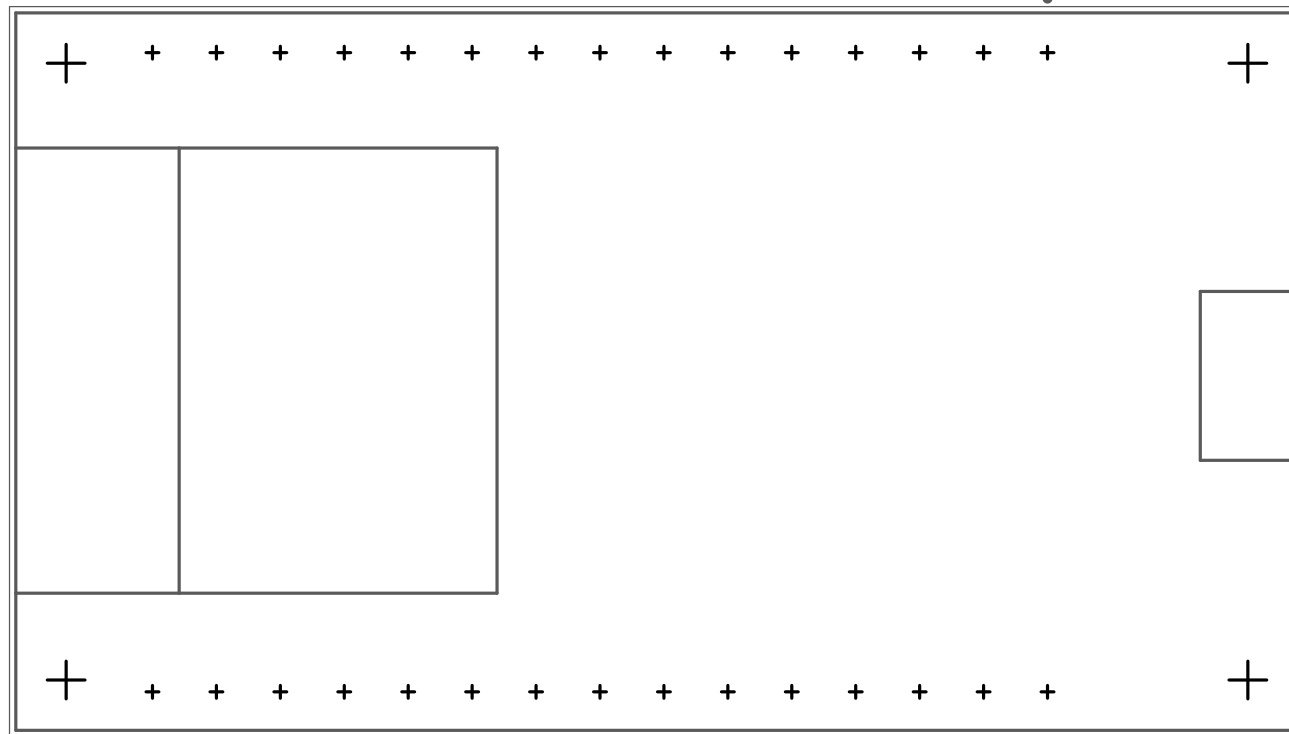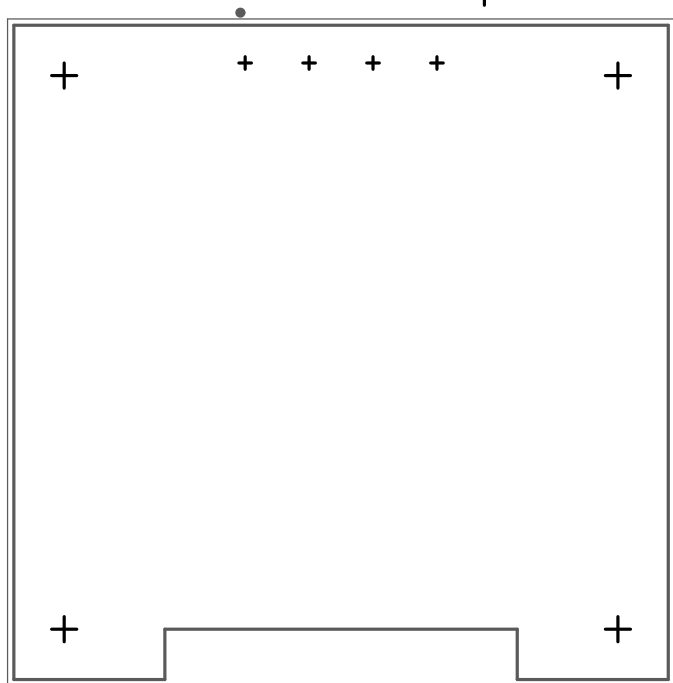

Name	Description	Designator	Footprint	LibRef	Quantity
10pf		C1	C320C	C320C104M5U5TA	1
100nf		C2, C4	C320C	C320C104M5U5TA	2
10uf	Capacitor Polarised	C3	CAPPRD350W65D800 H1300	470uf	1
BPW34	Diode	D1	BPW34	BPW34	1
IR_LED	LED, 5MM, ORANGE; LED / Lamp Size: 5mm / T-1 3/4; LED Colour: Orange; Typ Luminous Intensity: 4.3mcd; Viewing Angle: ...	D2	LEDRD254W57D500H 1070	L08R5000Q1	1
LM358P	Integrated Circuit	IC1	DIP794W53P254L959 H508Q8N	LM358P	1
282834-2	Terminal Block Connector PCB 2.54 mm 30-16 AWG Green 10 A 150 V M1.6 TE Connectivity 282834-2	J1	TE_282834-2	282834-2	1
2N2222A	Transistor BJT NPN	Q1	2N2907A	2N2222A	1
220K	Resistor	R1	resistor	220ohm resistor throuh hole_1	1
10k	Resistor	R2, R4, R5, R8	resistor	220ohm resistor throuh hole_1	4
20k	Resistor	R3	resistor	220ohm resistor throuh hole_1	1
220 ohm	Resistor	R6	resistor	220ohm resistor throuh hole_1	1
1K	Resistor	R7	resistor	220ohm resistor throuh hole_1	1
ESP32-DEVKIT-V1	Dual core, Wi-Fi: 2.4 GHz up to 150 Mbps/s,BLE (Bluetooth Low Energy) and legacy Bluetooth, 32 bits, Up to 240 MHz	U1	MODULE_ESP32_DEV KIT_V1	ESP32-DEVKIT-V1	1
DM-OLED096-636	0.96" 128 X 64 MONOCHROME GRAPHIC OLED DISPLAY MODULE - I2C	U2	MODULE_DM- OLED096-636	DM-OLED096-636	1

