

LI-FI TRANSMITTER

WARNING

D2

R1

R2

R4

R3

Q1

C2

C3

C1

D1

LI-FI LED

U1

J2

IR RX

J3



+5V

GND

POWER


J1

4x4 KEYPAD

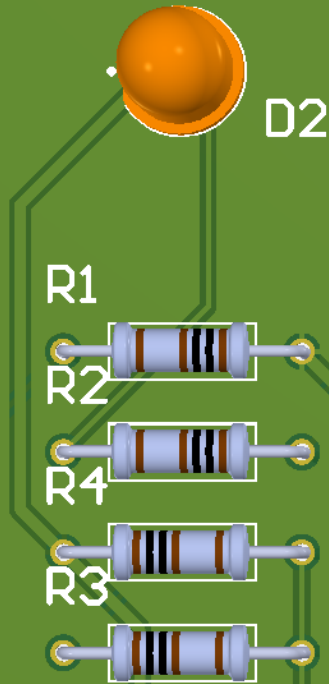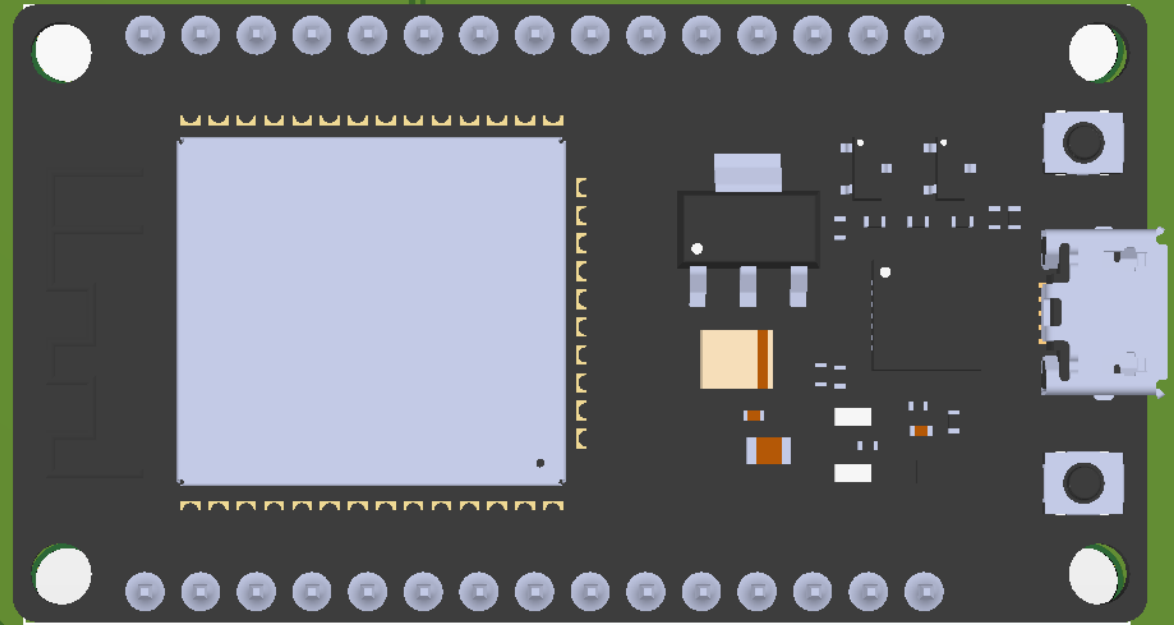


LI-FI TRANSMITTER

WARNING

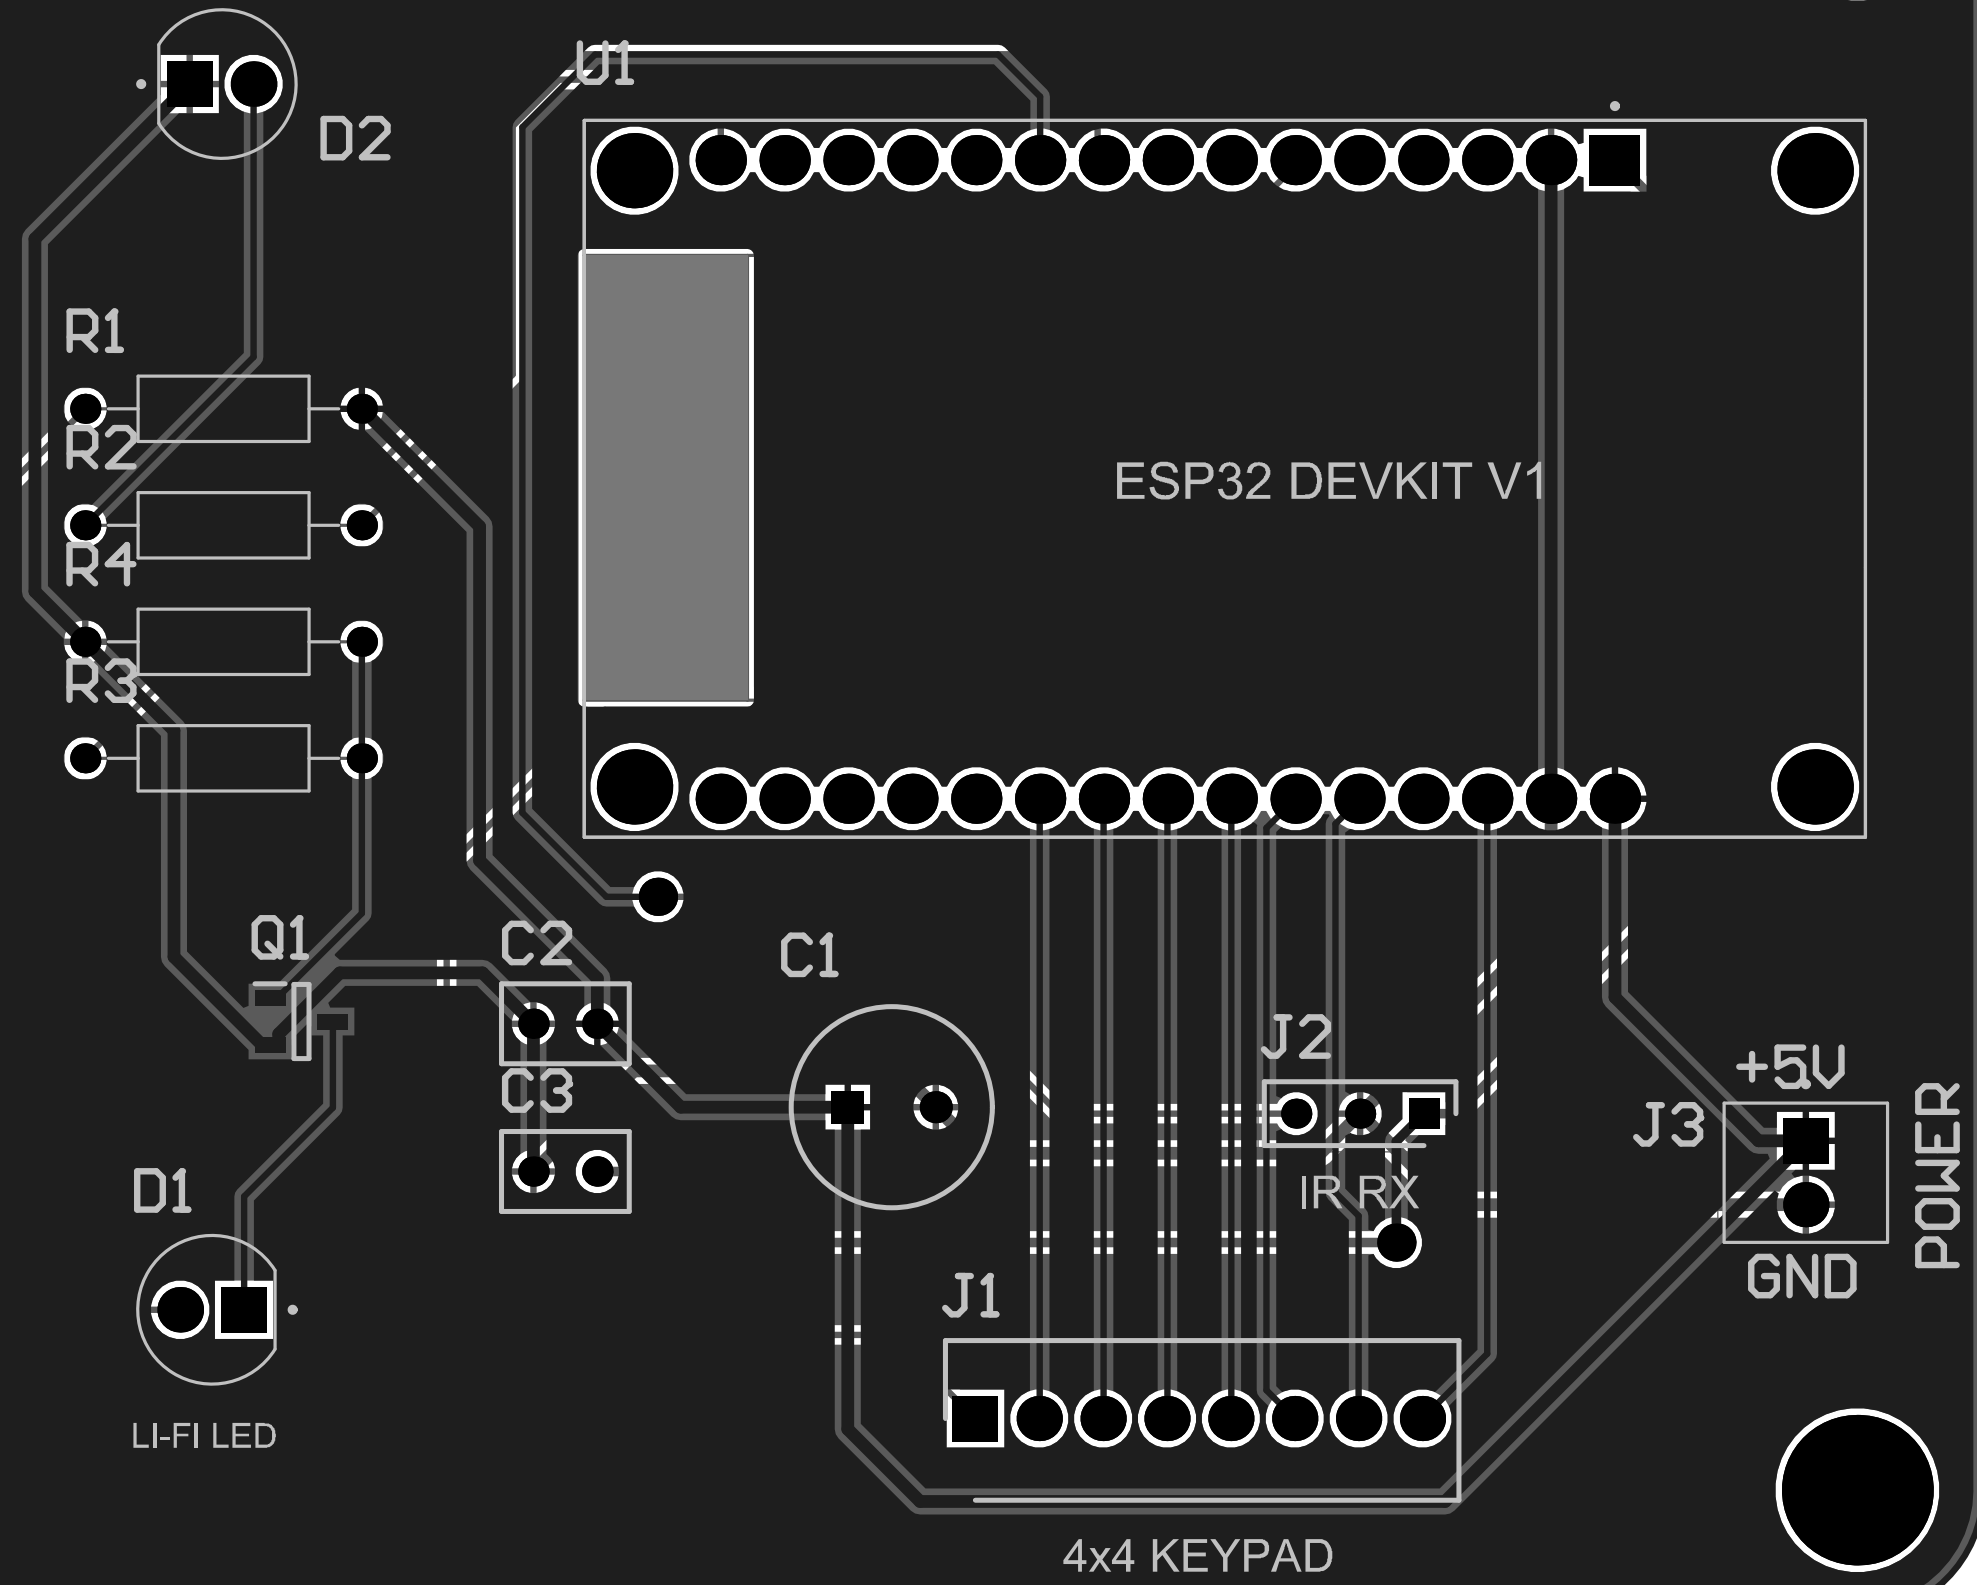

LI-FI TRANSMITTER

WARNING



D2

R1



R2




R4



R3



U1

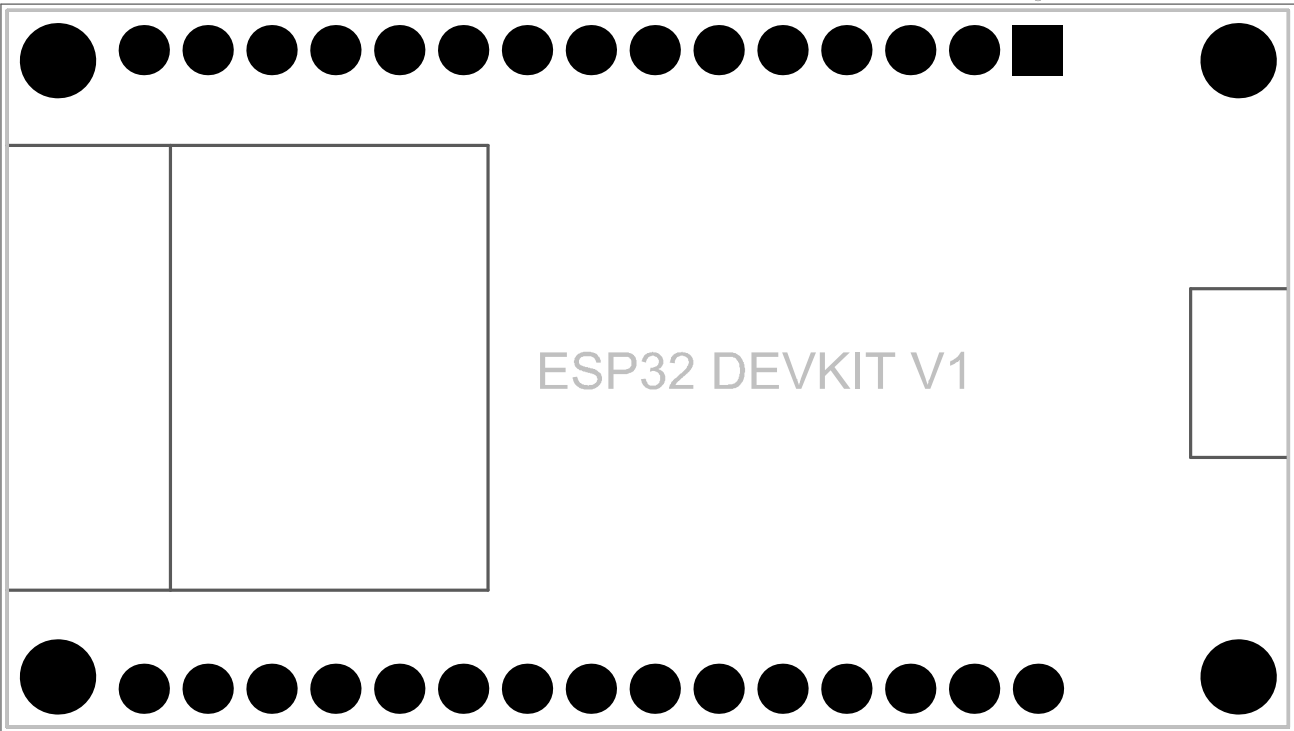

Q1




C2




C3



C1




J2



IR RX

J3




+5V

GND


POWER

D1


















LI-FI LED










J1

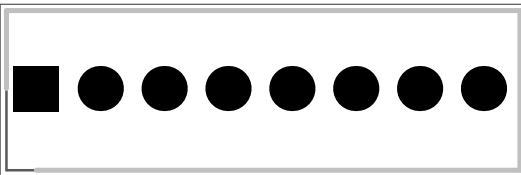

4x4 KEYPAD

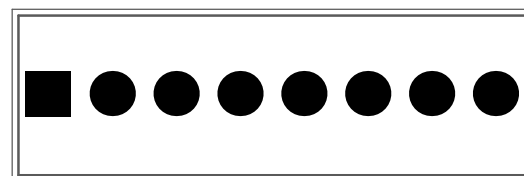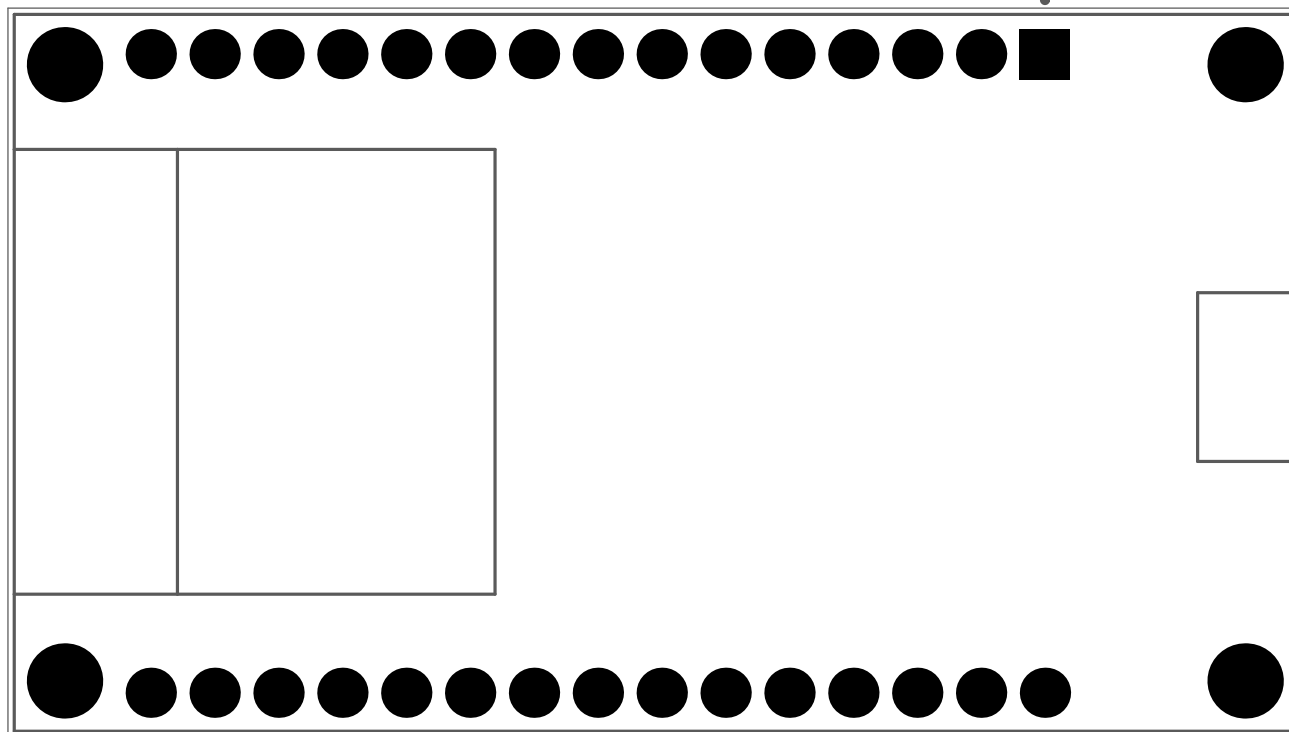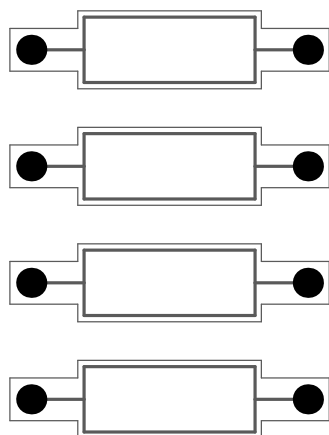

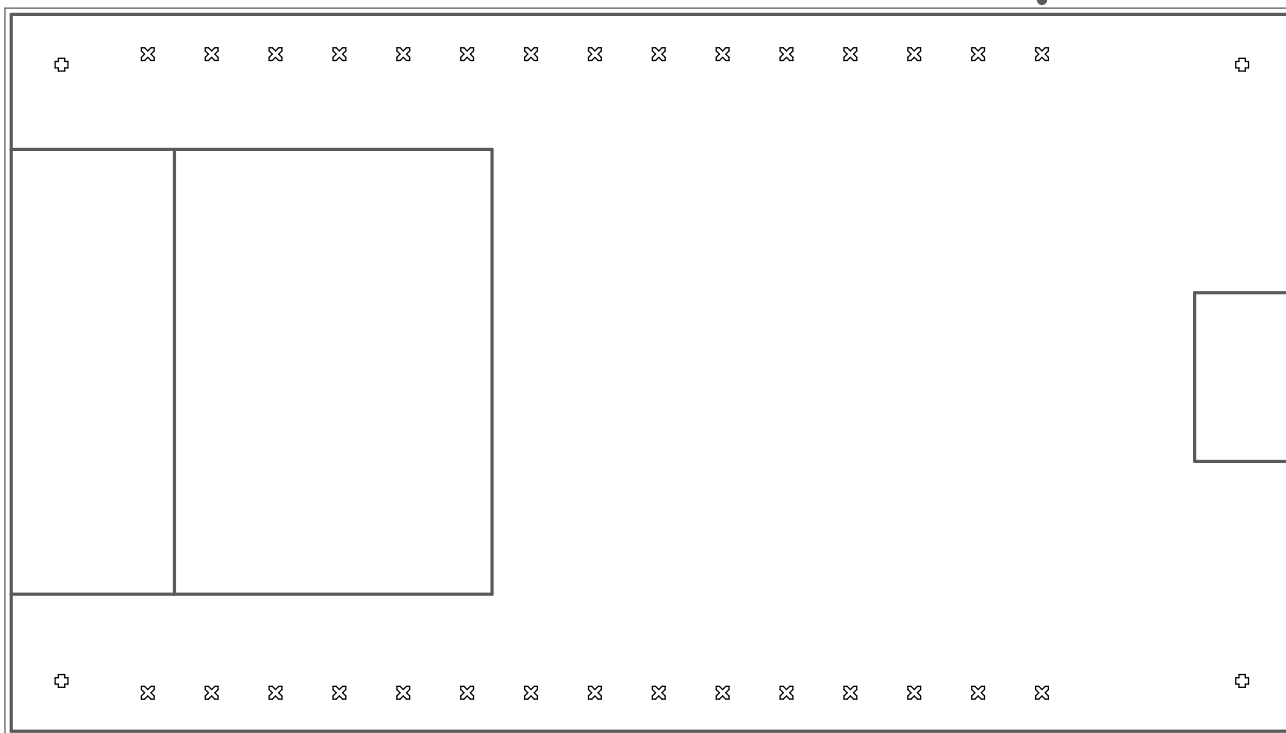

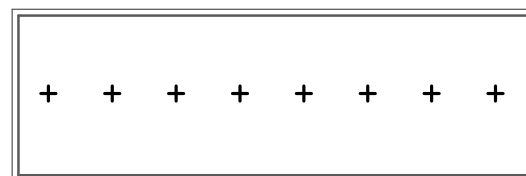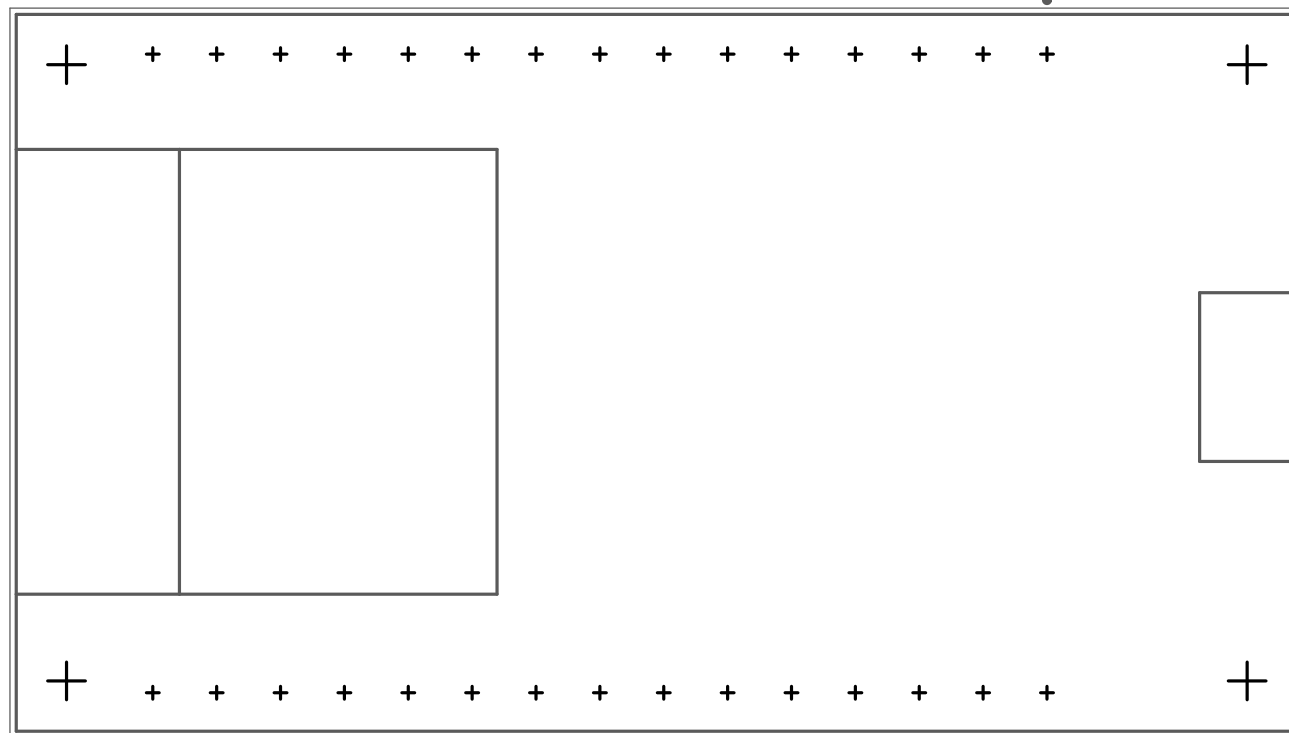

Name	Description	Designator	Footprint	LibRef	Quantity
470uf	Capacitor Polarised	C1	CAPPRD350W65D800 H1300	470uf	1
100nf		C2, C3	C320C	C320C104M5U5TA	2
White_LED	LED, 5MM, ORANGE; LED / Lamp Size: 5mm / T-1 3/4; LED Colour: Orange; Typ Luminous Intensity: 4.3mcd; Viewing Angle: ...	D1	LEDRD254W57D500H 1070	L08R5000Q1	1
RED_LED	LED, 5MM, ORANGE; LED / Lamp Size: 5mm / T-1 3/4; LED Colour: Orange; Typ Luminous Intensity: 4.3mcd; Viewing Angle: ...	D2	LEDRD254W57D500H 1070	L08R5000Q1	1
8 pin female header	Connector	J1	SHDR8W99P0X254_1X 8_2017X635X1124P	8 pin female header	1
801-93-003-10- 001000	Connector	J2	RHDR3W60P0X254_1 X3_762X254X701P	801-93-003-10- 001000	1
282834-2	Terminal Block Connector PCB 2.54 mm 30-16 AWG Green 10 A 150 V M1.6 TE Connectivity 282834-2	J3	TE_282834-2	282834-2	1
AO3400A	MOSFET (N-Channel)	Q1	SOT95P280X125-3N	AO3400A	1
3.3ohm	Resistor	R1	resistor	3.3ohm resistor throuh hole_1_1	1
330 ohm	Resistor	R2	resistor	3.3ohm resistor throuh hole_1_1	1
100ohm	Resistor	R3	resistor	100ohm resistor throuh hole_1_1	1
10k	Resistor	R4	resistor	10k resistor throuh hole_1	1
ESP32-DEVKIT-V1	Dual core, Wi-Fi: 2.4 GHz up to 150 Mbps/s,BLE (Bluetooth Low Energy) and legacy Bluetooth, 32 bits, Up to 240 MHz	U1	MODULE_ESP32_DEV KIT_V1	ESP32-DEVKIT-V1	1