User Manual


This user manual includes the details on how to install the system, PIR Configurations, Power configurations, User Application, and contact details.

User Manual Enclosure


- Main Enclosure Weight (with components) = 202g + 20g = 222g
- Camera Enclosure Weight (with components) = 122g
- 2 axis servos pan tilt (with servo motors) = 70g

Product Dimensions

Main Enclosure

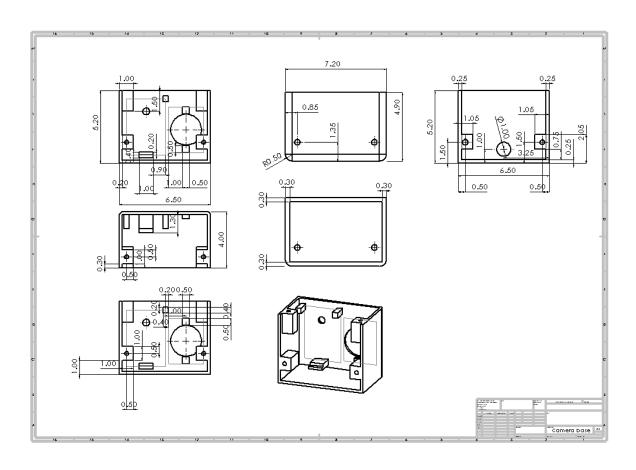


• Camera Enclosure

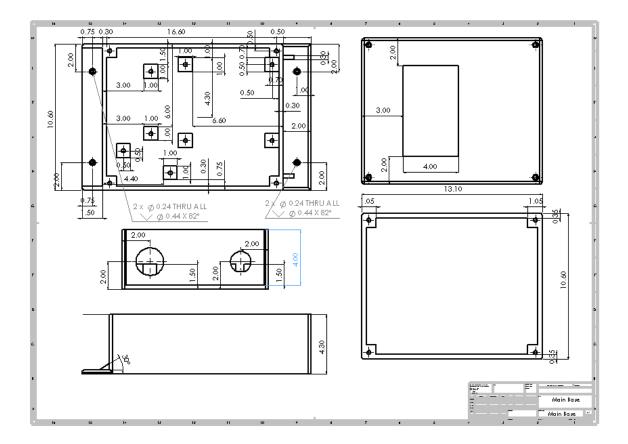

Installation


Main Base

Use the given 4 screws to install the main base to a flat surface.




Top Cover

Use the following holes and screws to connect the top cover to the main base.

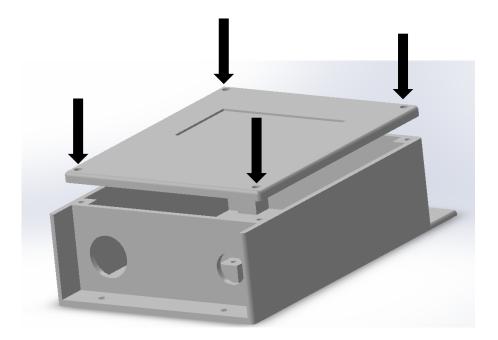


Camera Top Cover

Use the given 2 screws to connect the camera top cover to the camera base.



• Camera Back Cover

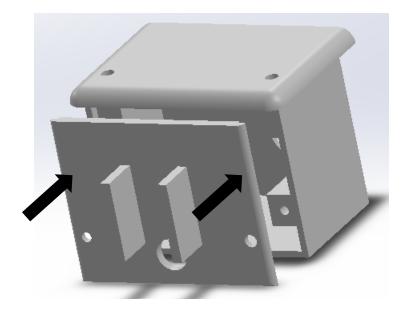

Use the given 2 screws to connect the camera back cover to the camera base.

Finally, you have to connect the camera to the top cover brackets.

PIR Configurations

Adjusting the sensitivity of the system

If the motion detection system is too sensitive or not enough sensitive, we can use the "S" adjusting point to adjust that. Put a screw into that point and turn it clockwise to make the sensitivity higher.

Adjusting the time delay of the system

An adjustable knob "T" is included to set the duration for which the output remains HIGH after detecting IR. This time frame can be set between 5 seconds and 5 minutes.





- You can click the reset button when you want to switch off the buzzer.
- Also, you can switch off it as per your choice.


Power Configurations

- Use the given Power extension to power the system.
- Directly connect to the Main supply. (240V/ 50Hz 13A)
- Warning Be mindful of the power connection!

User Application

- You can download the Application by scanning the following QR code.
- You can handle play, stop, and change direction with this application.



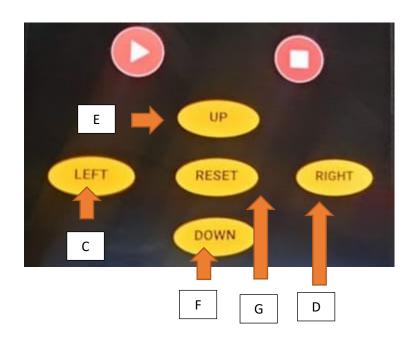

- A Play the LIVE VIDEO STREAMING
- B stop the streaming
- C Turn the Camera to the Left
- D Turn the Camera to the Right
- E Turn the Camera to the up
- F Turn the Camera the down
- G Rest the position



Connection Configuration

- After you buy the product, our technical team will contact you to inform you about the network connection.
- Our technical person will come to your premises and help you establish the connection configurations.
- Please make sure you have a stable internet connection.