


ESP32 UART Bridge

Physical Wiring Reference Guide

⚠ CRITICAL WARNING: The ESP32 operates at 3.3V logic. Connecting a 5V TX signal directly to the ESP32 RX pin (GPIO16) will permanently damage the microcontroller.

1. Standard 3.3V Logic Connection (Direct)

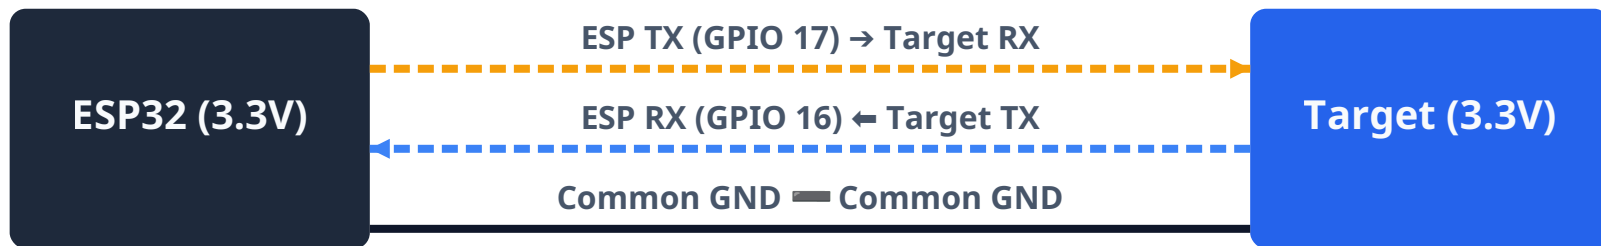

2. 5V Logic Connection (Requires Bi-Directional Level Shifter)

