Exp no: 11 (a) Simulate Static routing configuration using Cisco Packet Tracer.

27.09.24.

AIM:

To simulate a static routing configuration using Cisco Packet tracer.

PROCEDURE:

- Open Cisco, Packet Tracer and create the given network topology.
- Connect 3 routers and PC's using suitable cable.
- Configure IP address for routers and PC's.
- Enable all router interface using no shutdown.
- Set main and backup router using different administrative distance values
- Test connectivity.
- Disconnect the main link and verify that the backup router works.
- Thus a static routing is successfully configured and verified.


Exp no: 11(b) Simulate RIP using CISCO Packet Tracer.


AIM:

To simulate RIP using (3 routers and 2 PC's) CISCO Packet tracer.

PROCEDURE:

- Create the topology with 3 routers and 2PC's
- connect the device using suitable cables
- Assign the given IP address to both PC's.
- Configure fast Ethernet and serial interface of all routers.
- Enable interface using no shutdown.
- set clock rate & 4000 and bandwidth 64 on DE serial interface
- Test connectivity using ping 20.0.0.8
- Use tracer to 20.0.0.2 to verify the selected route
- Disconnect the direct router 0_ router 2 link and use tracer tagain to verify RIP selects the alternate route.

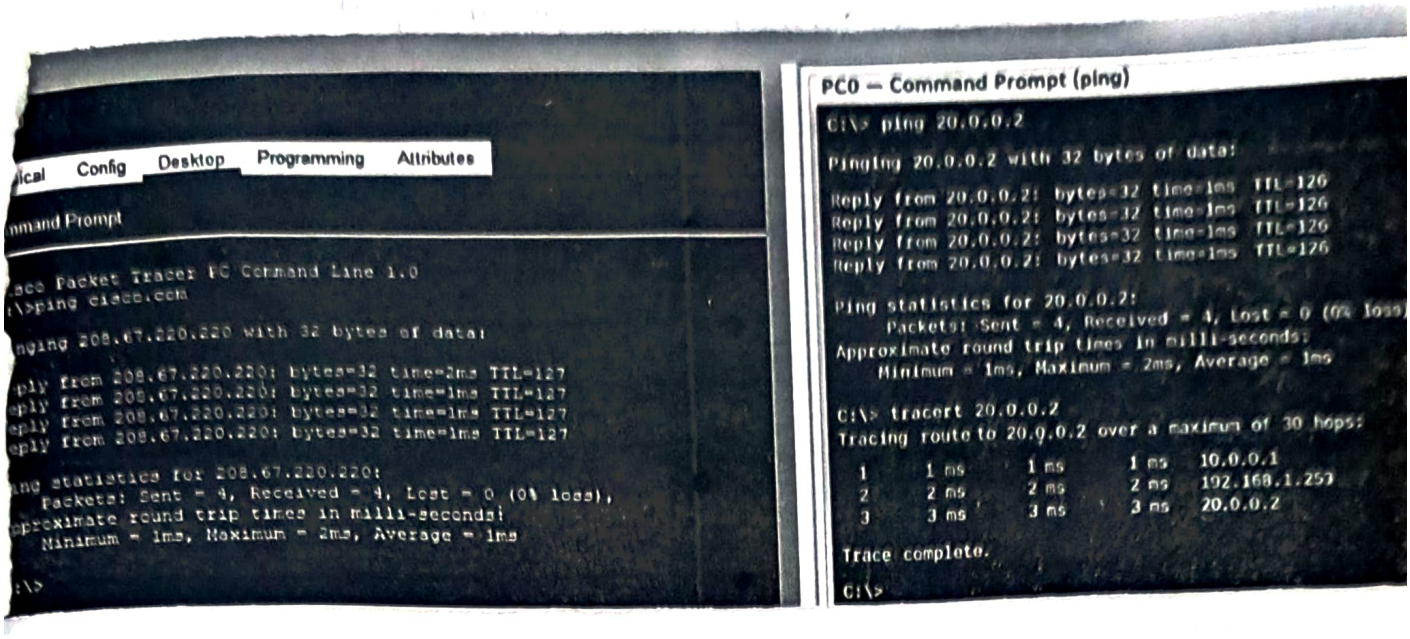

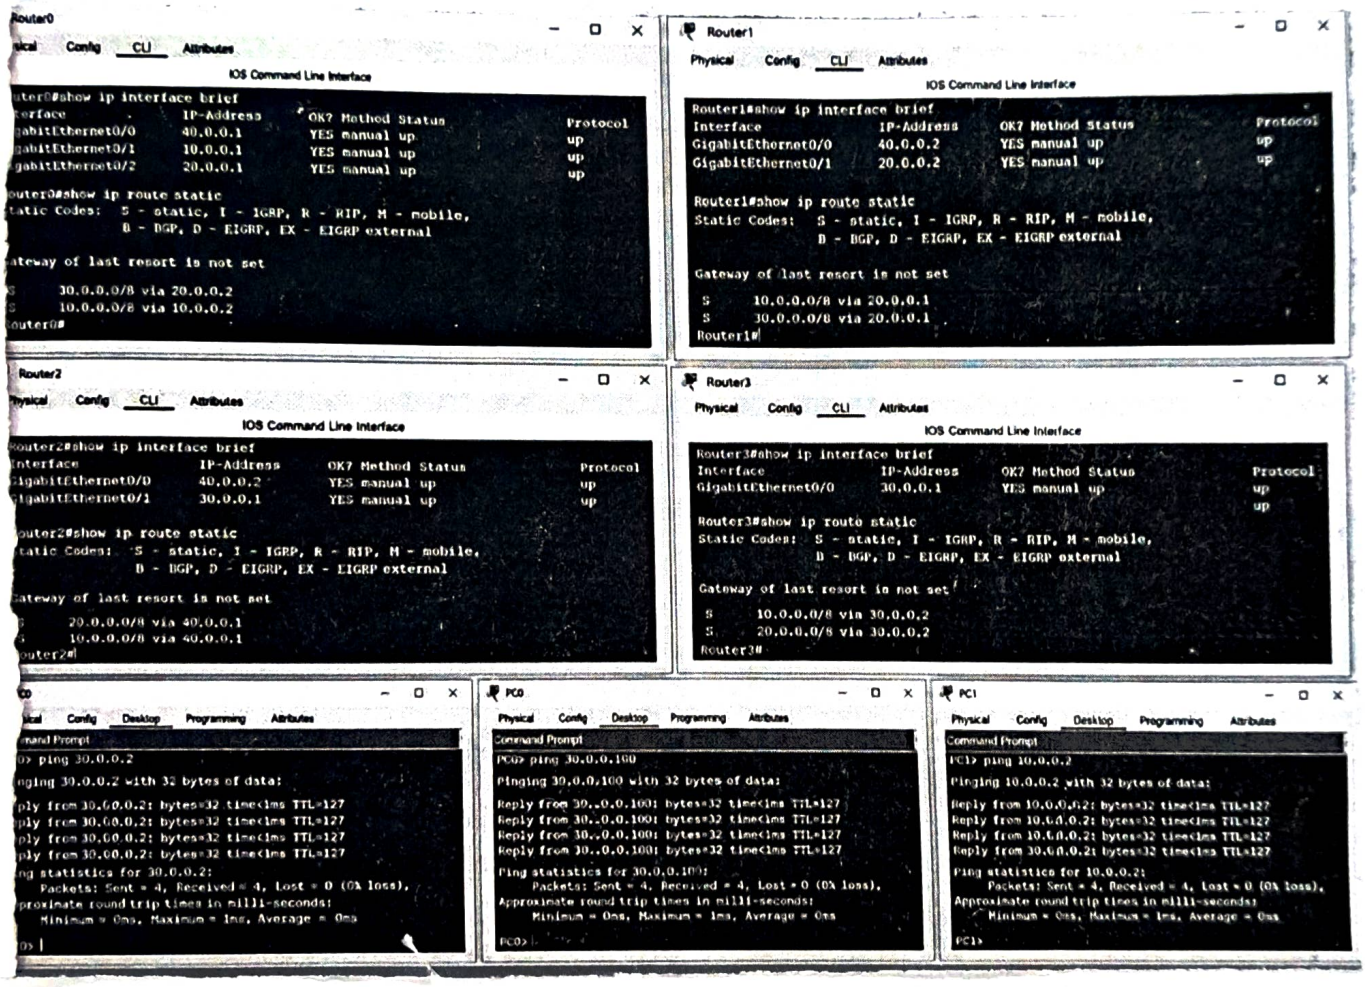

RESULT: Thus the simulation of RIP using ~~3 routers and~~ CISCO ~~Packet~~ Tracer was done.