Exp no:09 Implementation of subnetting in cisco packet
17.09.2026 Tracer simulator.

AIM:
To implement the subnetting in cisco Packet tracer simulator

PROCEDURE:

(i) Open Cisco Packet Tracer and create a new network topology

(ii) Add the required routes, switches and PCs to workspace.

(iii) Connect the device using appropriate copper cables

(iv) Use the network 192.168.1.0/24 and divide into /27 network

(v) Configure the routes interface with the required IP address and subnet mask 255.255.255.224.

(vi) Enter the interface configuration terminal and assign IP using
* ip address <IP address> 255.255.255.224
* no shutdown.

(vii) use enable and config terminal in the router CLI


(ix) Configure the required switch port in access mode

(X) Assign each PC its IP address, subnet mask and default gateway.

(xi) Repeat the configuration all required subnet.

(xii) Use the ping command to test connectivity between PC's and the Router.

The pink is successful, the network is configured successfully.

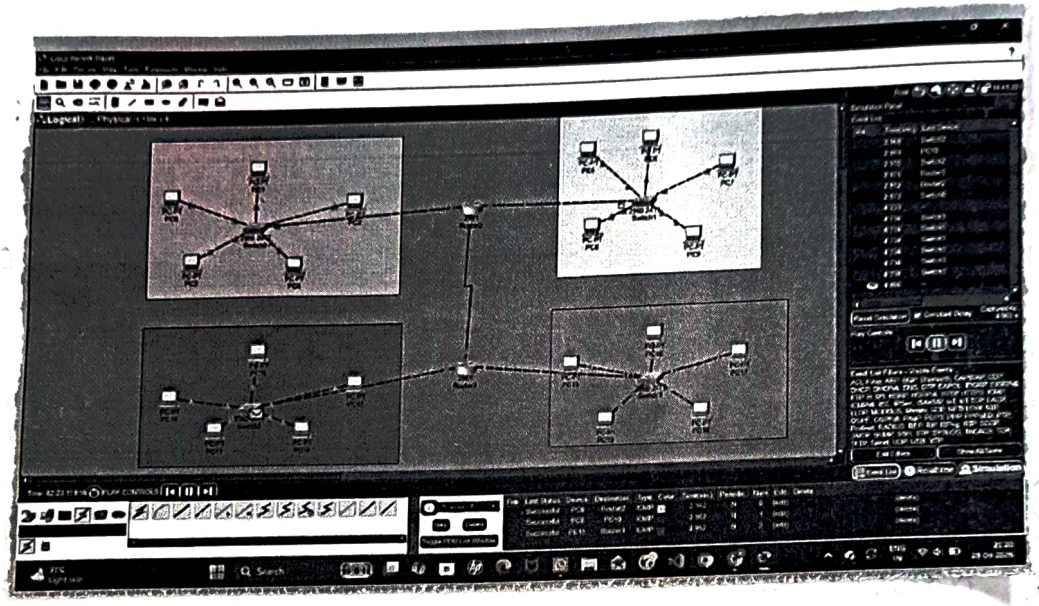

RESULT:

Thus, the implementation of subnetting was done.