


Procédure routeur

Pour accéder à l'interface du routeur :
Taper l'IP 10.2.0.254 dans un navigateur web

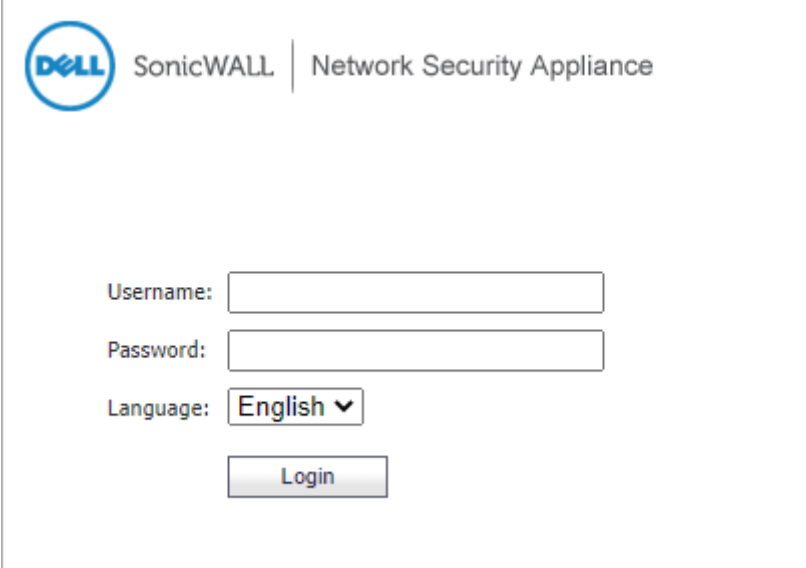


The image shows the login page of a SonicWALL Network Security Appliance. At the top left is the Dell SonicWALL logo. To its right, the text "SonicWALL | Network Security Appliance" is displayed. Below the header, there are three input fields: "Username:" followed by a text box, "Password:" followed by a text box, and "Language:" followed by a dropdown menu currently set to "English". Below these fields is a "Login" button.

Username : admin

Password : Alpha@mobile5

1-Comment rajouter une IP fixe

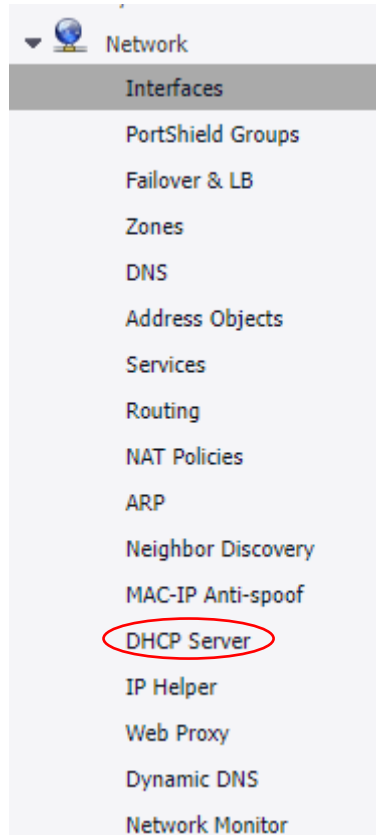

<input type="checkbox"/>	#	Type	Lease Scope ▼
<input type="checkbox"/>	1	Dynamic	Range: 10.2.0.11 - 10.2.0.49
<input type="checkbox"/>	2	Static	IP: 10.2.0.2 for MAC b4:b5:2f:68:2e:dd
<input type="checkbox"/>	3	Static	IP: 10.2.0.50 for MAC 9c:75:14:20:9c:60
<input type="checkbox"/>	4	Dynamic	Range: 10.2.0.51 - 10.2.0.253
<input type="checkbox"/>	5	Dynamic	Range: 172.16.31.2 - 172.16.31.254

Adresse MAC de l'appareil

Static Entry Configuration - Google Chrome

Non sécurisé | <https://10.2.0.254/dhcpStatProps.html>

SonicWALL | Network Security Appliance

General DNS/WINS Advanced

Static DHCP Scope Settings

☒ Enable this DHCP Scope

Entry Name:

Static IP Address:

Ethernet Address:

Lease Time (minutes):

Default Gateway:

Subnet Mask:

Comment:

☐ Interface Pre-Populate:

Ready

OK Cancel Help