

# Evaluating the human exposure of a UAV-aided network

Thomas Detemmerman

Student number: 01707806

Supervisors: Prof. dr. ir. Wout Joseph, Prof. dr. ir. Luc Martens

Counsellors: Dr. ir. Margot Deruyck, German Dario Castellanos Tache

Master's dissertation submitted in order to obtain the academic degree of  
Master of Science in Information Engineering Technology

Academic year 2019-2020



**Dankwoord**

todo

# Contents

<b>Acronyms</b>	<b>7</b>
<b>1 Introduction</b>	<b>8</b>
1.1 Outline of the issue . . . . .	8
1.2 Objective . . . . .	9
1.3 Structure . . . . .	9
<b>2 State of the art</b>	<b>10</b>
2.1 Deployment tool for an UAV-aided emergency network . . . . .	10
2.2 Capacity based deployment tool . . . . .	11
2.3 whipp . . . . .	12
<b>3 Methodology</b>	<b>13</b>
3.1 Calculating downlink exposure . . . . .	13
3.1.1 Calculating exposure towards a single femtocell . . . . .	13
3.1.2 Combining exposure . . . . .	14
3.2 Calculating uplink exposure . . . . .	14
3.2.1 Specific absorption rate . . . . .	14
3.3 Decision Algorithm . . . . .	16

<i>CONTENTS</i>	5
<b>4 Scenarios</b>	<b>18</b>
4.1 Downlink exposure versus power consumption . . . . .	18
4.2 Downlink exposure versus drone kost . . . . .	19
4.3 PL model versus exposure optimized model . . . . .	19
4.4 Uplink and downlink exposure versus fly height . . . . .	19
4.5 UL and downlink exposure vs horizontal distance . . . . .	19
4.6 Amount of users versus exposure . . . . .	19
<b>5 Conclusions</b>	<b>20</b>
<b>6 pseudocode</b>	<b>22</b>
6.1 Implementation of downlink exposure . . . . .	22
6.2 Implementation of uplink exposure . . . . .	24



# Acronyms

**DL** downlink. 9

**EIRP** Equivalent Isotropical Radiation Power. 12

**ICNIRP** International Commission on Non-Ionizing Radiation Protection. 6

**IEC** International Electrotechnical Commission. 13

**SAR** Specific Absorption Rate. 13, 22

**UABS** Unmanned Arial Base Station. 8, 9, 16

**UE** User Equipment. 10, 13, 14, 22

**WHIPP** WiCa Heuristic Indoor Propagation Prediction. 10

# 1

## Introduction

### 1.1 Outline of the issue

Society is constantly getting more and more dependent on electronic communication. On any given moment in any given location, an electronic device can request to connect to a bigger wireless medium. Devices need more then ever to be connected starting from small IOT sensors up to self-driving cars.

Once again it becomes clear why we're on the eve of a new generation of cellular communication named 5G. This new technology is capable of handling millions of connections every square meter while satisfying only a few microseconds of a delay and providing connections up to 10Gbps [1].

Also in exceptional and possibly life-threatening situations, we rely on the cellular network. For example during the terrorist attacks in Zaventem, a Belgian city. Mobile network operators saw all telecommunications drastically increasing causing moments of contention. Some operators decided to temporarily exceed the limited exposure in order to handle all connections. [2]

Electromagnetic exposure can however not be neglected. Research shows how exesive electromagnetic radiation can cause diverse biological side effects [3] and human exposure towards these electromagnetic waves should be limited. The International Commission on Non-Ionizing Radiation Protection (ICNIRP) suggests a limitation of 61 V/m. Also on national levels restric-



tions have been enforced but differ from location to location. In Brussels for example is a far more restrictive limitation enforced of 6 V/m for all sources [4, 5].

## 1.2 Objective

The general goal is to temporarily take over the wireless telecommunication network in the event of a disaster causing the normal network infrastructure to malfunction.

The deployment tool does not calculate the electromagnetic exposure of the different active users in the area.

TODO: waarin differentieert mijn MP zich????

todo: onderstaande tekst (in commentaar) is een letterlijke copy van J10-RDP. Het is hier gezet als referentie. Moet nog correct verwoorden:

## 1.3 Structure

The following chapter 2 exists of several successive sections explaining how the electromagnetic exposure of a single human being is calculated. The first section 3.1.1 explains how the exposure is calculated between a user and a single femtocell. Section 3.1.2 defines how to combine all exposures from the different femtocells towards a single users. Finally, section ?? explains how directional antenna's are taken into account.

# 2

## State of the art

### 2.1 Deployment tool for an UAV-aided emergency network

The paper [6] describes a deployment tool which designs an emergency network covering the necessary users.

One way of creating such an ad-hoc network that is easily distributed over a given area is with the aid of a drone. By attaching femtocell on these UAV's, a mobile base station is achieved. Such a device is called an Unmanned Aerial Base Station (UABS)

A disaster area is given to the tool along with a time period and a configuration file containing specifications of the UABS. The files of the disaster area contains three dimensional descriptions of the buildings present in the area. These are key values in approaching as realistic results as possible. The tool randomly distributes users over the area and assigns a certain bitrate that the user requires.

A second phase calculates the optimal position for each UABS. This is done by trying to locate a UABS above each active user. Two options are possible. If a flight height is defined, all base stations are located above its user at the given height unless a building is obstructing its location. Then no base station will be located above the user. If no flight height is given to the

tool, the basestation is located 4 meters above the outdoor user of 4 meters above the building where the indoor user resides. The later is only allowed if the suggested height remains below the given maximum allowed height.

The third phase the authors of [6] sorted each UABS on whether they were active or not, followed by the increasing pathloss from each UABS to that user. So the algorithm starts by checking for each active UABS if it can cover the user. If this is the case, the user will be connected to this UABS. If not, the second active basestation with a (slightly) worse pathloss is considered. If no active basestation is suitable, inactive UABS are considered. The user remains uncovered if no UABS is found. The reasoning behind first only considering basestations that are already active is the high cost that comes along with each drone.

Up till now, the tool has only calculated some suggestions. The effective provisioning is done in the fourth phase where drones are sorted by the amount of users it covers. As long as UABS are available in the facility where they reside, UABS are provisioned and its users are marked as covered.

## 2.2 Capacity based deployment tool

The described network in 2.1 tries to connect the user to the best basestation based on pathloss while provisioning as least basestations as possible. However, when developing a network it is also important to take electromagnetic field exposure and power consumption into account. Several models have been published on how to calculate downlink electromagnetic field strengths. The calculations in this paper are based on [4] which not only describes downlink (DL) exposure but also defines a fitness function describing on how the network is performing. Grid points are distributed over the area separated with a fixed distance. Firstly, the DL exposure in a grid point from each basestation is calculated and each value is combined resulting in the total exposure in that point. This is repeated for every single gridpoint. Secondly, the electromagnetic exposure for each grid point is calculated and the 50<sup>th</sup> and 95<sup>th</sup> percentile are used to find the global network exposure.

Based on the formula described in equation 3.1 of section 3.1.1, it will become clear that exposure increases exponentially compared to the input power of an antenna and optimizing towards powerconsumption should therefore also decrease its exposure

However, when taking the electromagnetic exposure and powerconsumption of the entire net-

work, both value's become inversely proportional. Take for instance two users with each their own nearby basestation. When optimizing towards exposure, both basestations will radiate just enough to cover the user near them. When optmizing towards power consumption, it will be better to shut down one of the basestations because each basestation requires a minimal amount of power. The other basestation will rediate slightly more by using slightly more energy but less then keeping the other basestation alive.

This results in a fitness functions with waiting factors indicating the importance of eighter electromagnetic fields or powerconsumption for a joint optimization of both values. It is espected that this approach is also usefull in a UAV-aided network since drones have a limited battery capacity.

## 2.3 whipp

Users are not only exposed to electric fields originating from femtocells but also by their own devices. The authors of [7] make use of a WiCa Heuristic Indoor Propagation Prediction (WHIPP) tool. A collection of heuristic algorithms used for designing an optimal indoor network by placing femtocells on the ground plan of the considered building. The paper describes how to calculate localised SAR values originating from a User Equipment (UE) to an UMTS femtocell. The paper's model is validated using a Nokia N95. The uplink SAR<sub>10g</sub> depend on the maximum possible SAR<sub>10g</sub> and transmit power. The maximum SAR<sub>10g</sub> is device dependent. Since the deployment tool in this paper is designed voor outdoor usage connecting different unknown types of UE a median of possible  $SAR_{10g}^{max}$  phones should be calculated. The actual  $SAR_{1g}^{max}$  can't be used since femtocell are short range. Therefor UE will seldom achieve it's maximum possible radiation. Just like [7], a real  $SAR_{10g}$  should be predicted.

# 3

## Methodology

todo: Downlink traffic is created by modulation of frequencies caused by a base station. However,

### 3.1 Calculating downlink exposure

#### 3.1.1 Calculating exposure towards a single femtocell

To determine the total exposure of a single human being or even of the entire network, the electric-field  $\vec{E}$  of a single femtocell  $i$  should be calculated. The formula to determine this electromagnetic value  $E$  (expressed in V/m) for a specific location is given in equation 3.1.

$$E_i = 10^{\frac{EIRP - 43.15 + 20 \cdot \log(f) - PL}{20}} \quad (3.1)$$

This formula requires several values to be known. The frequency  $f$  on which the transmitting antenna is operating is expressed in MHz. The other values are explained in 3.1.1 and 3.1.1.

#### Equivalent Isotropical Radiation Power

A directional antenna can achieve gain by focussing it's input power into certain directions. By doing this, some areas experience a decreased radiation power in order to gain radiation power in

the other privileged areas. If a theoretical isotropic radiator **todo: uileggen wat isotropic radiator is** existed, the Equivalent Isotropical Radiation Power (EIRP) is the power it would require to achieve the same power level as the actual antenna's main lob. The main lob is the area of the directional antenna experiencing the most gain. This EIRP value can be calculated as described in eq 3.2.

$$EIRP = P_t + G_t - L_t \quad (3.2)$$

This value is expressed in dBm and requires tree values.  $P_t$  is the transmit power (dBm),  $G_t$  is the gain (dBi) of the transmitting antenna and  $L_t$  stands for it's cable loss (dB) [8].

## Pathloss

At last, formula 3.2 requires the path loss (dB). In order calculate the path loss, an appropriate propagation model is required. Several propagation models exists and the tool already uses the Walfish-Ikegami model [6]. This is because the Walfish-Ikegami model performs well for femtocell networks in urban areas. The chosen propagation model consists of two formulas depending on whether a free line of sight between the user and the basestation exist or not. Both formulas expect a distance in kilometer.

input power hangt af van bs tot bs.

### 3.1.2 Combining exposure

Since the user location in the UAV-aided network is known, the exposure is not calculated for gridpoints but for active users. compared to gridpoints in ref state of art manets -> exposure combineren

$$E_{tot} = \sqrt{\sum_{i=1}^n E_i^2} \quad (3.3)$$

## 3.2 Calculating uplink exposure

### 3.2.1 Specific absoption rate

**todo:** de 10g slaat al op localized, vandaar dat het maar 10g is, anders is het whole-body  
**todo:** we kunnen niet sar10gmax gebruiken want This means that the SAR calculations will be worst-case and possibly an overestimation of the real localised SAR. (herwoorden voor plagiaat)

Human exposure caused by downlink traffic is a not negligible asset. However, telecommunications is not a one-way street. When connecting to a UMTS network, also uplink data caused by the UE should be considered.

UE generates, just like femtocells, electromagnetic waves to which a user is exposed. A part of this radiation goes to the femtocell, another part enters the body of its user. How much electromagnetic strength enters the body is defined as Specific Absorption Rate (SAR) and is measured with 10g biological tissue which represents the human skin. This value will from now on be expressed as  $SAR_{10g}$ .

A mobile device induces two types of exposure: local and whole-body. Whole-body exposure can be neglected compared to the much higher local exposure[9]. From now on,  $SAR_{10g}$  implicitly means local exposure.


International Electrotechnical Commission (IEC) defines in IEC:62209-2 a maximum for a 10g tissue  $SAR_{10g}^{max}$  as 2 W/kg and a maximum for a 1g tissue  $SAR_{1g}^{max}$  as 1.6 W/kg. Most countries, including Belgium, enforce the 10g model and will, therefore, be the point of reference for this master dissertation.

The  $SAR_{10g}$  values are phone dependent. The reported values by companies of mobile devices are worst-case scenarios meaning that the values are measured when the phone is transmitting at maximum power. This is an understandable decision but won't result in a realistic scenario since modern cellular networks use power control mechanisms to prevent over radiation of a nearby device. UE will therefore never use more energy than necessary to maintain a connection.

To compensate for this overestimation, the actual  $SAR_{10g}$  of each user will be predicted. These will, however, remain an estimation since the position of the phone related too the head differs from user to user. For example, by holding the phone differently, a hand can absorb more or less electromagnetic radiation. TODO: bron.

$$SAR_{10g} = \frac{P_{tx}}{P_{tx}^{max}} * SAR_{10g}^{max} \quad (3.4)$$

Equation 3.4 is used to predict the actual  $SAR_{10g}$  of a certain user. The SAR value is different for each mobile device. An average is calculated based on 3516 different phones from various brands using an up-to-date German database [10]. When the phone is positioned at the ear, an average of 0.7 W/kg is found with a standard deviation of 0.25 W/kg which are very similar results as in Ref. [9]. The median of 0.67 is used.

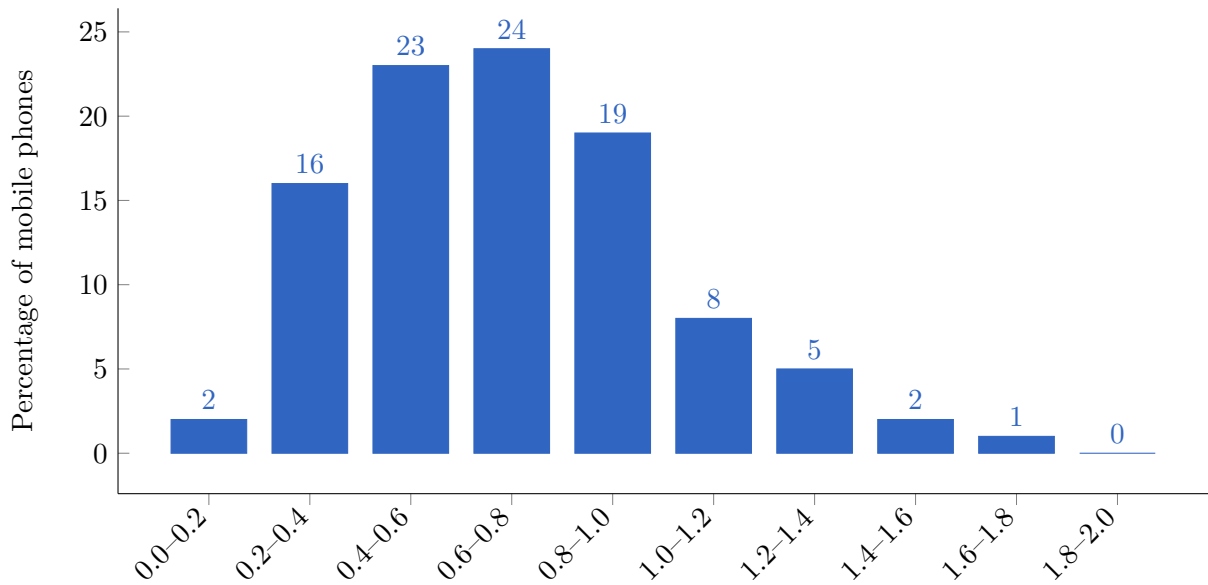

todo:

xlabel, zeggen dat bovengrens niet inbegrepen is en titel geven.

The  $P_{Tx}^{max}$  is for LTE and UMTS 23 Dbm [11, 7].

To predict the effective transmitted power by the UE, the following equation is used:

$$P_{Tx} = P_{sens} + PL \quad (3.5)$$

$$P_{sens} = P_{noise} + SNR - G + IL + NF + IF \quad (3.6)$$

### 3.3 Decision Algorithm

fitness function: ... - max possible exposure - weighted average (but for each user instead of each grid point)

J1 zegt:

The decision for allocating a user to a base station is changed. In [19], a base station was only switched on when there was no active base station to which the user could connect. This is no longer the case as discussed in Section 3.2 because this is

not the appropriate decision when optimizing towards exposure.

- previous model between my "generator" class



The tool is extended with a alternative model which will connect users towards exposure and power consumption.

# 4

## Scenarios

### 4.1 Downlink exposure versus power consumption

The authors of [6] proposed a fitness function for a joint optimization of the global network exposure and the overall power consumption. This idea works fine for high powered base stations capable of covering multiple users. For example when optimizing towards exposure, the algorithm will decide to activate multiple low powered base stations. This has a negative influence on the overall power consumption of the network because each base station requires a minimal amount of power to be active. Analogously while the algorithm shut down base stations when optimizing towards power consumption. Active base stations will slightly increase their individual power consumption and therefore also increase electromagnetic radiation to be able to cover more users. This power increase is of course less than the activation of a new base station.

The deployment tool described in this paper makes use of UAV's, equipped with femtocell base stations. These are low powered devices compared to base stations used in the terrestrial network with a more limited range. Most users are therefore connected to the UABS placed directly above them. By increasing either the amount of users or the maximum input power. **The graph below shows the amount of users compared to the amount of users that are connected to their own base stations.**

It becomes clear that this fitness function will primarily optimize towards exposure (unless with a lot of users)

## 4.2 Downlink exposure versus drone kost

## 4.3 PL model versus exposure optimized model

## 4.4 Uplink and downlink exposure versus fly height

## 4.5 UL and downlink exposure vs horizontal distance

## 4.6 Amount of users versus exposure

# 5

## Conclusions

todo

## Bibliography

- [1] *5G Wireless Systems Simulation and Evaluation Techniques*. Springer.
- [2] D. standaard, “Base overschreed stralingsnormen na aanslagen,” *De standaard*, 2016.
- [3] L. Hardell and C. Sage, “Biological effects from electromagnetic field exposure and public exposure standards,” *Biomedicine and Pharmacotherapy*, vol. 62, no. 2, pp. 104 – 109, 2008.
- [4] M. Deruyck, E. Tanghe, D. Plets, L. Martens, and W. Joseph, “Optimizing lte wireless access networks towards power consumption and electromagnetic exposure of human beings,” *Computer Networks*, vol. 94, 12 2015.
- [5] D. Plets, W. Joseph, S. Aerts, K. Vanhecke, G. Vermeeren, and L. Martens, “Prediction and comparison of downlink electric-field and uplink localized sar values for realistic indoor wireless planning,” *Radiation protection dosimetry*, vol. 162, 02 2014.
- [6] M. Deruyck, J. Wyckmans, W. Joseph, and L. Martens, “Designing uav-aided emergency networks for large-scale disaster scenarios,” *EURASIP Journal on Wireless Communications and Networking*, vol. 2018, 12 2018.
- [7] D. Plets, W. Joseph, S. Aerts, K. Vanhecke, G. Vermeeren, and L. Martens, “Prediction and comparison of downlink electric-field and uplink localised sar values for realistic indoor wireless planning,” *Radiation Protection Dosimetry*, vol. 162, no. 4, pp. 487–498, 2014.
- [8] “Snr, rssi, eirp and free space path loss,” Mar 2019.
- [9] A. Gati, E. Conil, M.-F. Wong, and J. Wiart, “Duality between uplink local and downlink whole-body exposures in operating networks,” *IEEE transactions on electromagnetic compatibility*, vol. 52, no. 4, pp. 829–836, 2010.
- [10] “Bundesamt für strahlenschutz.” [http://www.bfs.de/SiteGlobals/Forms/Suche/BfS/EN/SARsuche\\_Formular.html](http://www.bfs.de/SiteGlobals/Forms/Suche/BfS/EN/SARsuche_Formular.html). Accessed: 14-10-2019.
- [11] P. Joshi, D. Colombi, B. Thors, L.-E. Larsson, and C. Törnevik, “Output power levels of 4g user equipment and implications on realistic rf emf exposure assessments,” *IEEE Access*, vol. 5, pp. 4545–4550, 2017.

# 6

## pseudocode

### 6.1 Implementation of downlink exposure

Schrijf over hoe die exposure nu toegevoegd is aan de tool. -Wat deed de tool al? Users en femtocell's uniform verdelen op publiek transport, uabs etc - dat de exposure pas op het einde wordt berekend nadat het netwerk gemodelleerd is.

Algorithm 1 describes the implementation on how to calculate the exposure of a user towards a single base station as described in formula 3.1. Several values need to be known for this to work. In the first place, the path loss is calculated. However, the different path loss values are already calculated during the network initialization phase and can, therefore, be reused on the condition they were saved. By only calculating the path loss once, the time complexity of the tool decreases drastically. After this, the gain is calculated by adding the antenna gain to the current input power of the antenna and by subtracting the feeder loss as already stated in equation 3.2. In the last place, equation 3.1 is used and the exposure is returned.

To combine all exposures for a specific user, equation 3.3 is translated into algorithm 2. Finally, this needs to be repeated for every users. Algorithm 3 is used to iterate over each user and each simulation and saves the computed value into the appropriate attribute.

To provide a summary of how the network is performing on electromagnetic exposure, a weighted

---

**Algorithm 1** getExposure

---

**Input** user, basestation

---

**Output** exposure of a user towards a single basestation

---

- 1:  $PL \leftarrow$  path loss between user and basestation
  - 2:  $gain \leftarrow$  getBSantennagain + basestation.getInputPower - getBSFeederLoss
  - 3:  $exposure \leftarrow 10^{\frac{EIRP - 43.15 + 20 \cdot \log(f) - PL}{20}}$
  - 4: **return**  $exposure$
- 

---

**Algorithm 2** getTotalExposure

---

**Input** user, basestations[]

---

**Output** combined exposures from each basestation for a given user

---

- 1:  $E_{tot} \leftarrow 0.0$
  - 2: **for all** basestation in basestations **do**
  - 3:      $E \leftarrow$  getExposure(user, basestation)
  - 4:      $E_{tot} \leftarrow E_{tot} + E^2$
  - 5:  $E_{tot} \leftarrow \text{sqrt}(E_{tot})$
  - 6: **return**  $E_{tot}$
- 

---

**Algorithm 3** Calculate and save the total exposure for each user in each simulation

---

**Input** users[], basestations[]

---

**Output** /

---

- 1: **for**  $simulation = 1, 2, \dots, basestations$  **do**
  - 2:     **for all** user in users[simulation] **do**
  - 3:          $user.exposure \leftarrow$  getTotalExposure(user, basestations[simulation])
-

average is calculated. This is implemented in algorithm 4 which takes all users for a specified simulation and two weighting factors  $w_1$  and  $w_2$ . They respectively correspond to the 50th percentile and 95th of the ordered users' exposure. The two weights get equal importance of 0.5. This is because also higher values should be taken into account and not compensated with very low values. The formula will only use electric field strengths where users are active as opposed to [4] where the area is divided into grids and the exposure is calculated for every gridpoint. The reasoning behind this is that the goal of this master dissertation is to calculate the average exposure of the user and not of the entire area.

The formula first calculates the index where the mean value and the 95th percentile should be located. Afterwards, the exposure is calculated using interpolation if necessary.

---

**Algorithm 4** globalUserExpsoure

---

**Input**  $users[]$ ,  $w_1$ ,  $w_2$

**Output** Weighted average of the median and the 95th percentile electric field strenght

1: Sort users by  $E_{tot}$

▷ E50

2:  $meanIndex \leftarrow \frac{users.length}{2}$

3: **if**  $users.length \% 2 == 0$  **then**

4:    $E_{50} \leftarrow users[meanIndex].exposure$

5: **else**

6:    $E_{50} \leftarrow \frac{(users[meanIndex].exposure) + (users[meanIndex-1].exposure)}{2}$

▷ E95 with interpolation

7:  $X \leftarrow users.length * 0.95$

8:  $X_1 \leftarrow \lfloor x \rfloor$

9:  $X_2 \leftarrow \lceil x \rceil$

10:  $Y_1 \leftarrow users[X_1].exposure$

11:  $Y_2 \leftarrow users[X_2].exposure$

12:  $E_{95} \leftarrow Y_1 + \left( \frac{(X - X_1)}{(X_2 - X_1)} * (Y_2 - Y_1) \right)$

13: **return**  $\frac{(w_1 * E_{50}) + (w_2 * E_{95})}{w_1 + w_2}$

---

## 6.2 Implementation of uplink exposure

Analogously to the 6.1, the uplink calculator will determine the uplink exposure and save in the appropriate user object. The calculator starts with iterating over each user in each simulation and calls the `getSar()` function.

?? is implemented in ??. The function requires a user as input for which the uplink exposure



should be calculated and two constant values which should be declared once. The maximal allowed  $SAR_{10g}$  as discussed in 3.2.1 and maximal permitted transmission power of 23 dbm.

Also, the actual transmitting power of the UE needs to be calculated using the `getActualTransmitPower` function.

Both  $Tx_{watt}$  and  $TX_{watt}^{max}$  are converted to watt. This is because the decibel variant can range from -57 dBm to 23 dBm [?]. Converting to Watt results in a solely positive fraction.

After having multiplied with the maximum allowable SAR, the actual uplink exposure is returned.

---

**Algorithm 5** `getSar`


---

**Input** user

**Output**  $SAR_{10g}$

- 1: const  $SAR^{max} \leftarrow 0.67$
  - 2: const  $TX_{watt}^{max} \leftarrow dBm2W(23)$
  - 3:  $Tx_{watt} \leftarrow dBm2W(getActualTransmitPower(user))$
  - 4:  $SAR_{10g} \leftarrow \frac{Tx_{watt}}{TX_{watt}^{max}} * SAR^{max}$
  - 5: **return**  $SAR_{10g}$
- 

The implementation for `getActualTransmitPower` is described in ?? . This function requires a user as a parameter and will calculate the real used power for transmission in dBm. Once again, a global constant value is defined describing the maximum allowable transmitting power  $Tx_{dBm}^{max}$  expressed in dBm. The predicted transmitting power is achieved by subtracting the path loss between the user and the affective femtocell with the receiver sensitivity of the femtocell. However, this value can't be higher then  $Tx_{dBm}^{max}$  , if this is the case the maximum allowable transmitting power is returned instead.

---

**Algorithm 6** `getActualTransmitPower`


---

**Input** user

**Output** The actual used power for transmtion in dBm.

- 1: const  $Tx_{dBm}^{max} \leftarrow 23$
  - 2:  $Tx_{dBm} \leftarrow user.getPathLoss() - technology.getFemtocellReceiverSensitivity(user.getRxSNR)$
  - 3: **return**  $\min(Tx_{dBm}, Tx_{dBm}^{max})$
-