
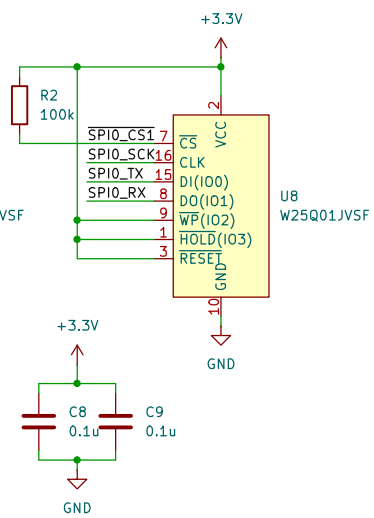
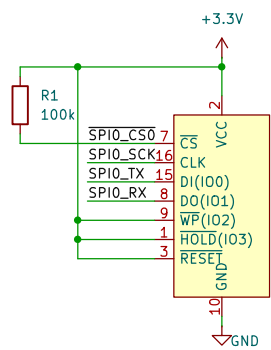
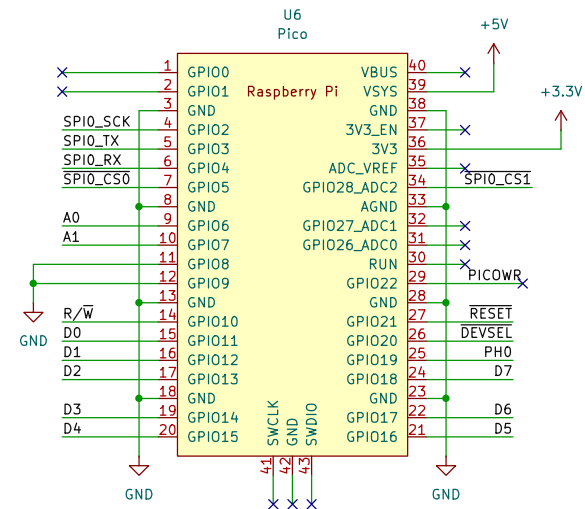

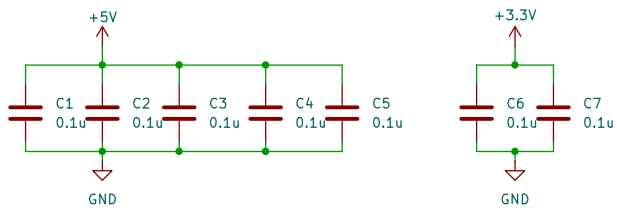
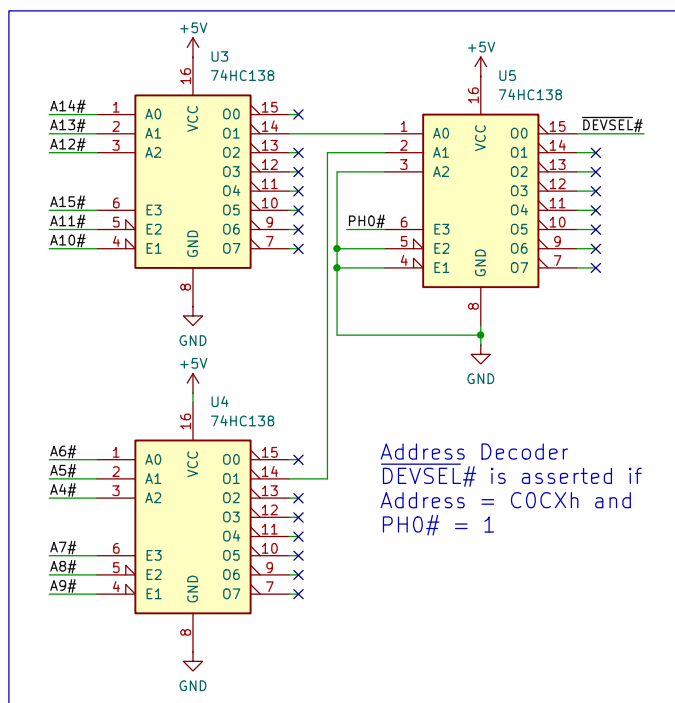
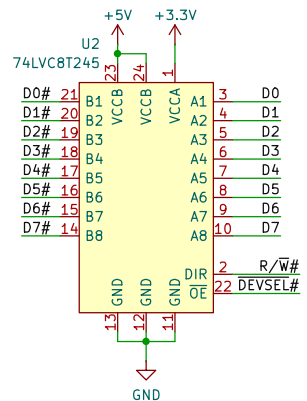
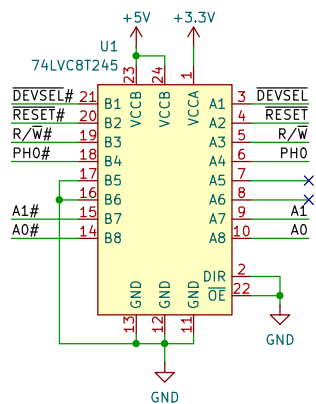


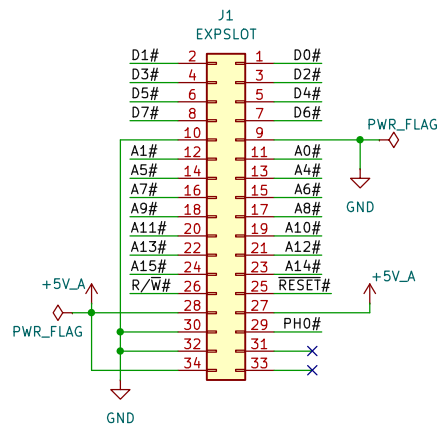

1) Power can be supplied to USB port of Pico. The diode makes sure the current from Pico USB port cannot flow into Apple.
2) The flash chips are powered by 3.3V from Pico so that they can be accessed when Apple is turned off but Pico is powered by USB port.

Sheet: /	
File: megaflash.kicad_sch	
Title: MegaFlash	
Size: A4	Date: 2025-09-09
KiCad E.D.A. 9.0.4	Rev: 1.2
	Id: 1/1