


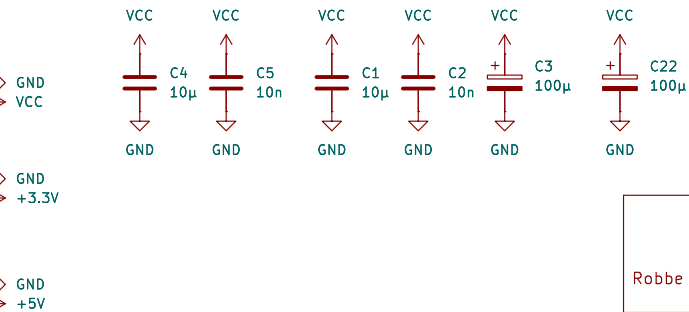

\_\_\_\_\_


Encoder

11/11/2019

File: encoder.kicad\_sch

## ADC inputs

Id: 1/11

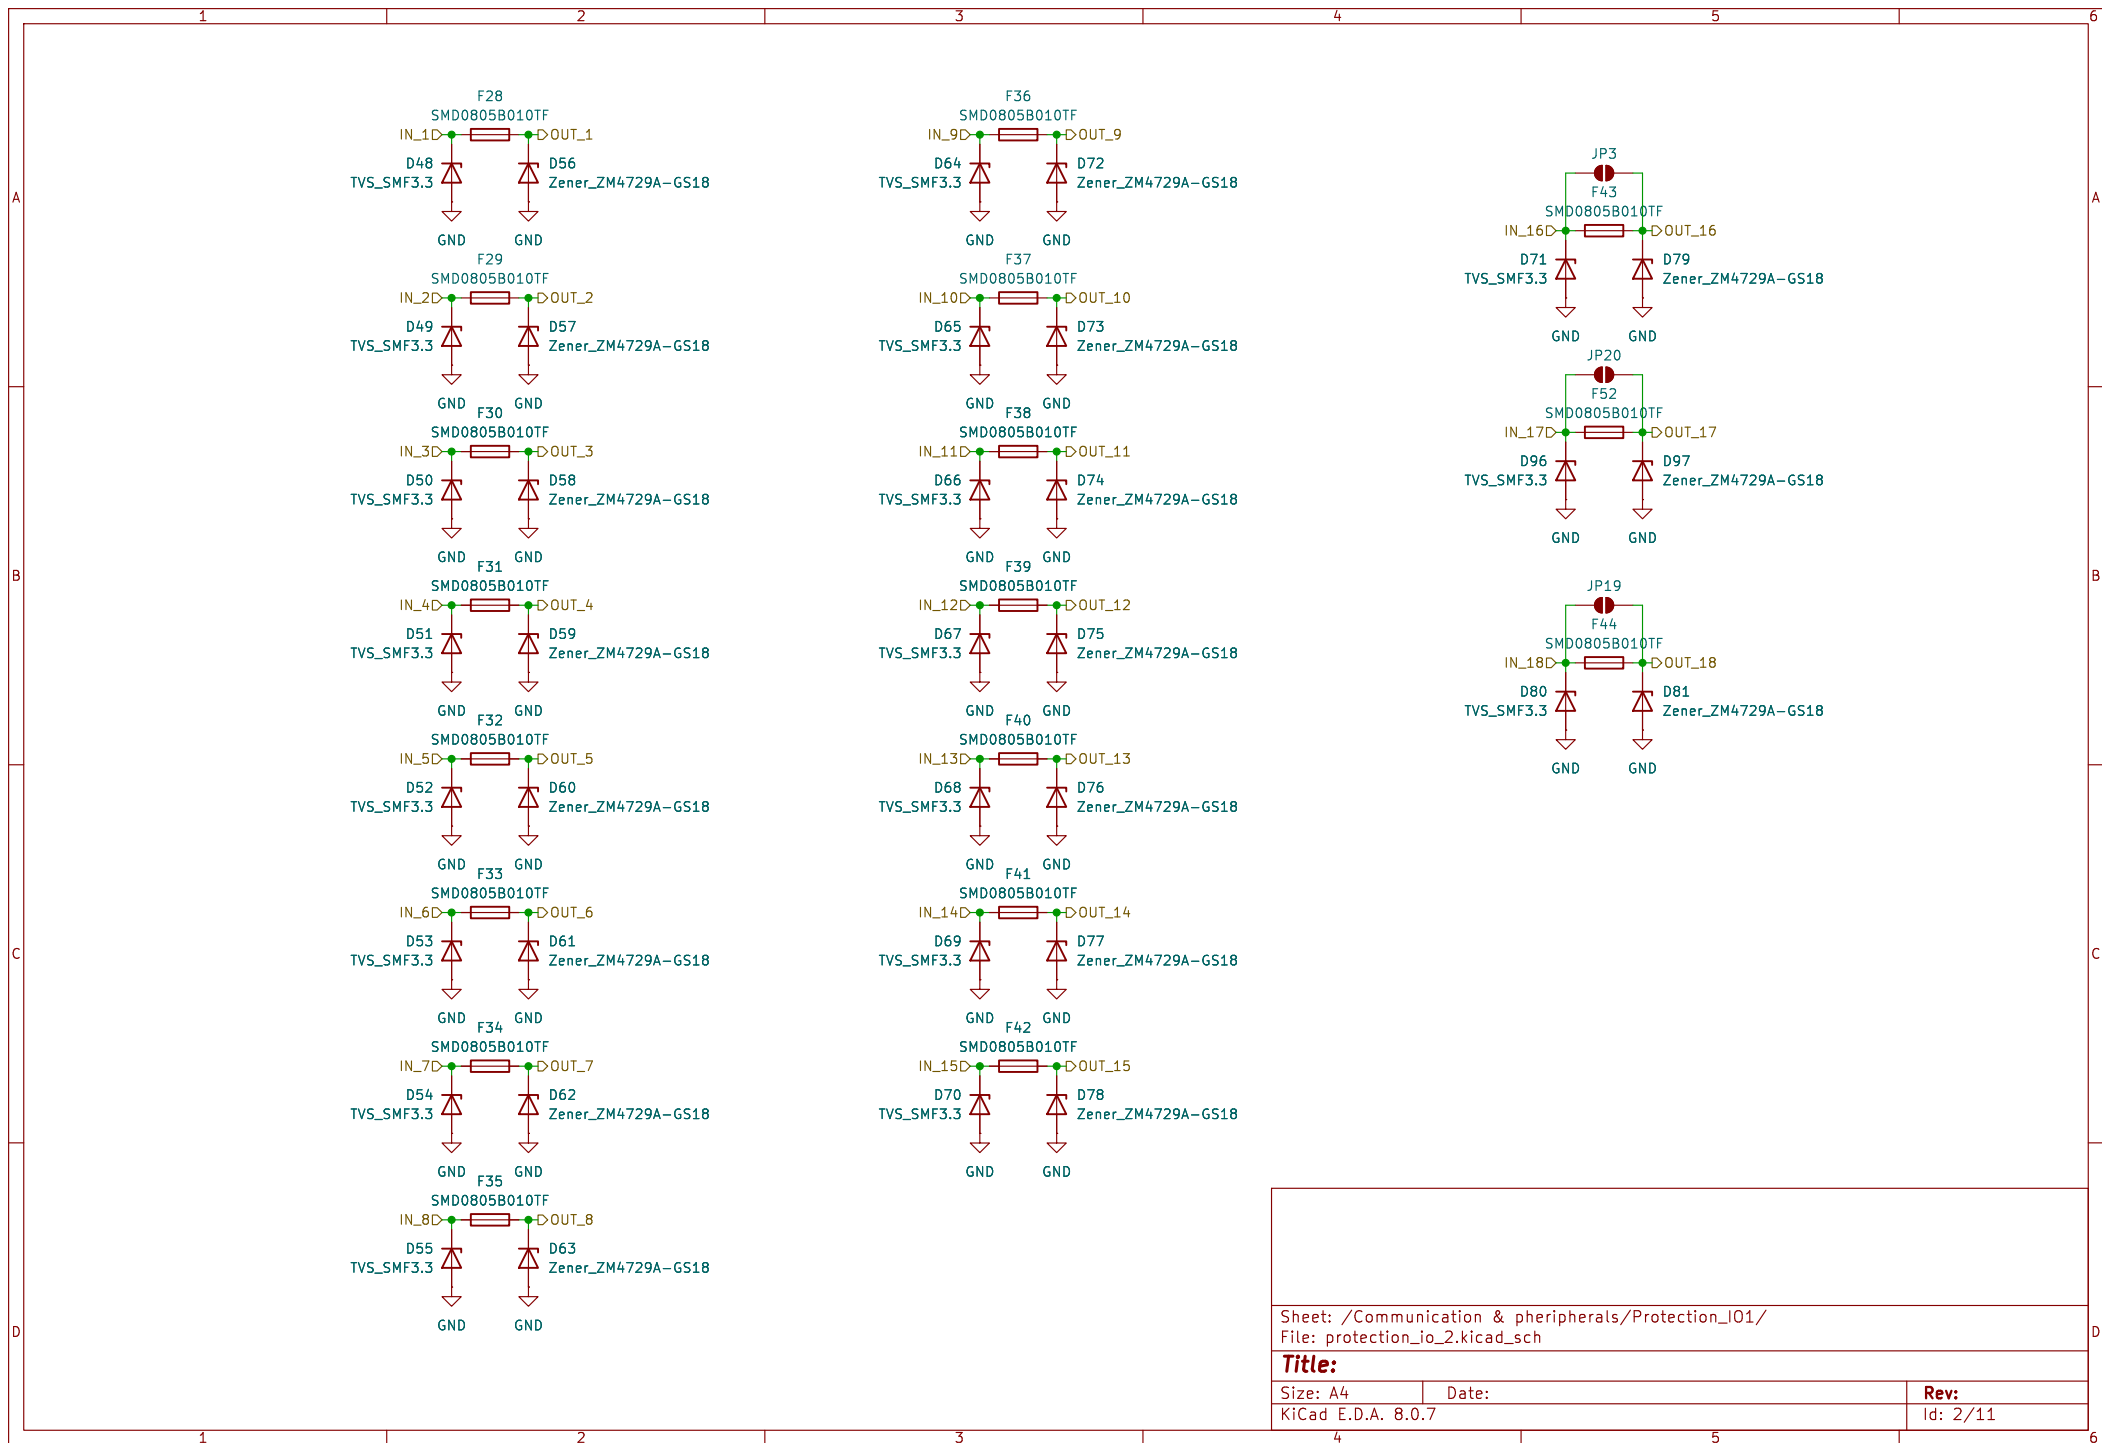

Sheet: /Communication & peripherals/Protection\_I01/  
File: protection\_io\_2.kicad\_sch

**Title:**


Size: A4

Date:

**Rev:**

KiCad E.D.A. 8.0.7

Id: 2/11

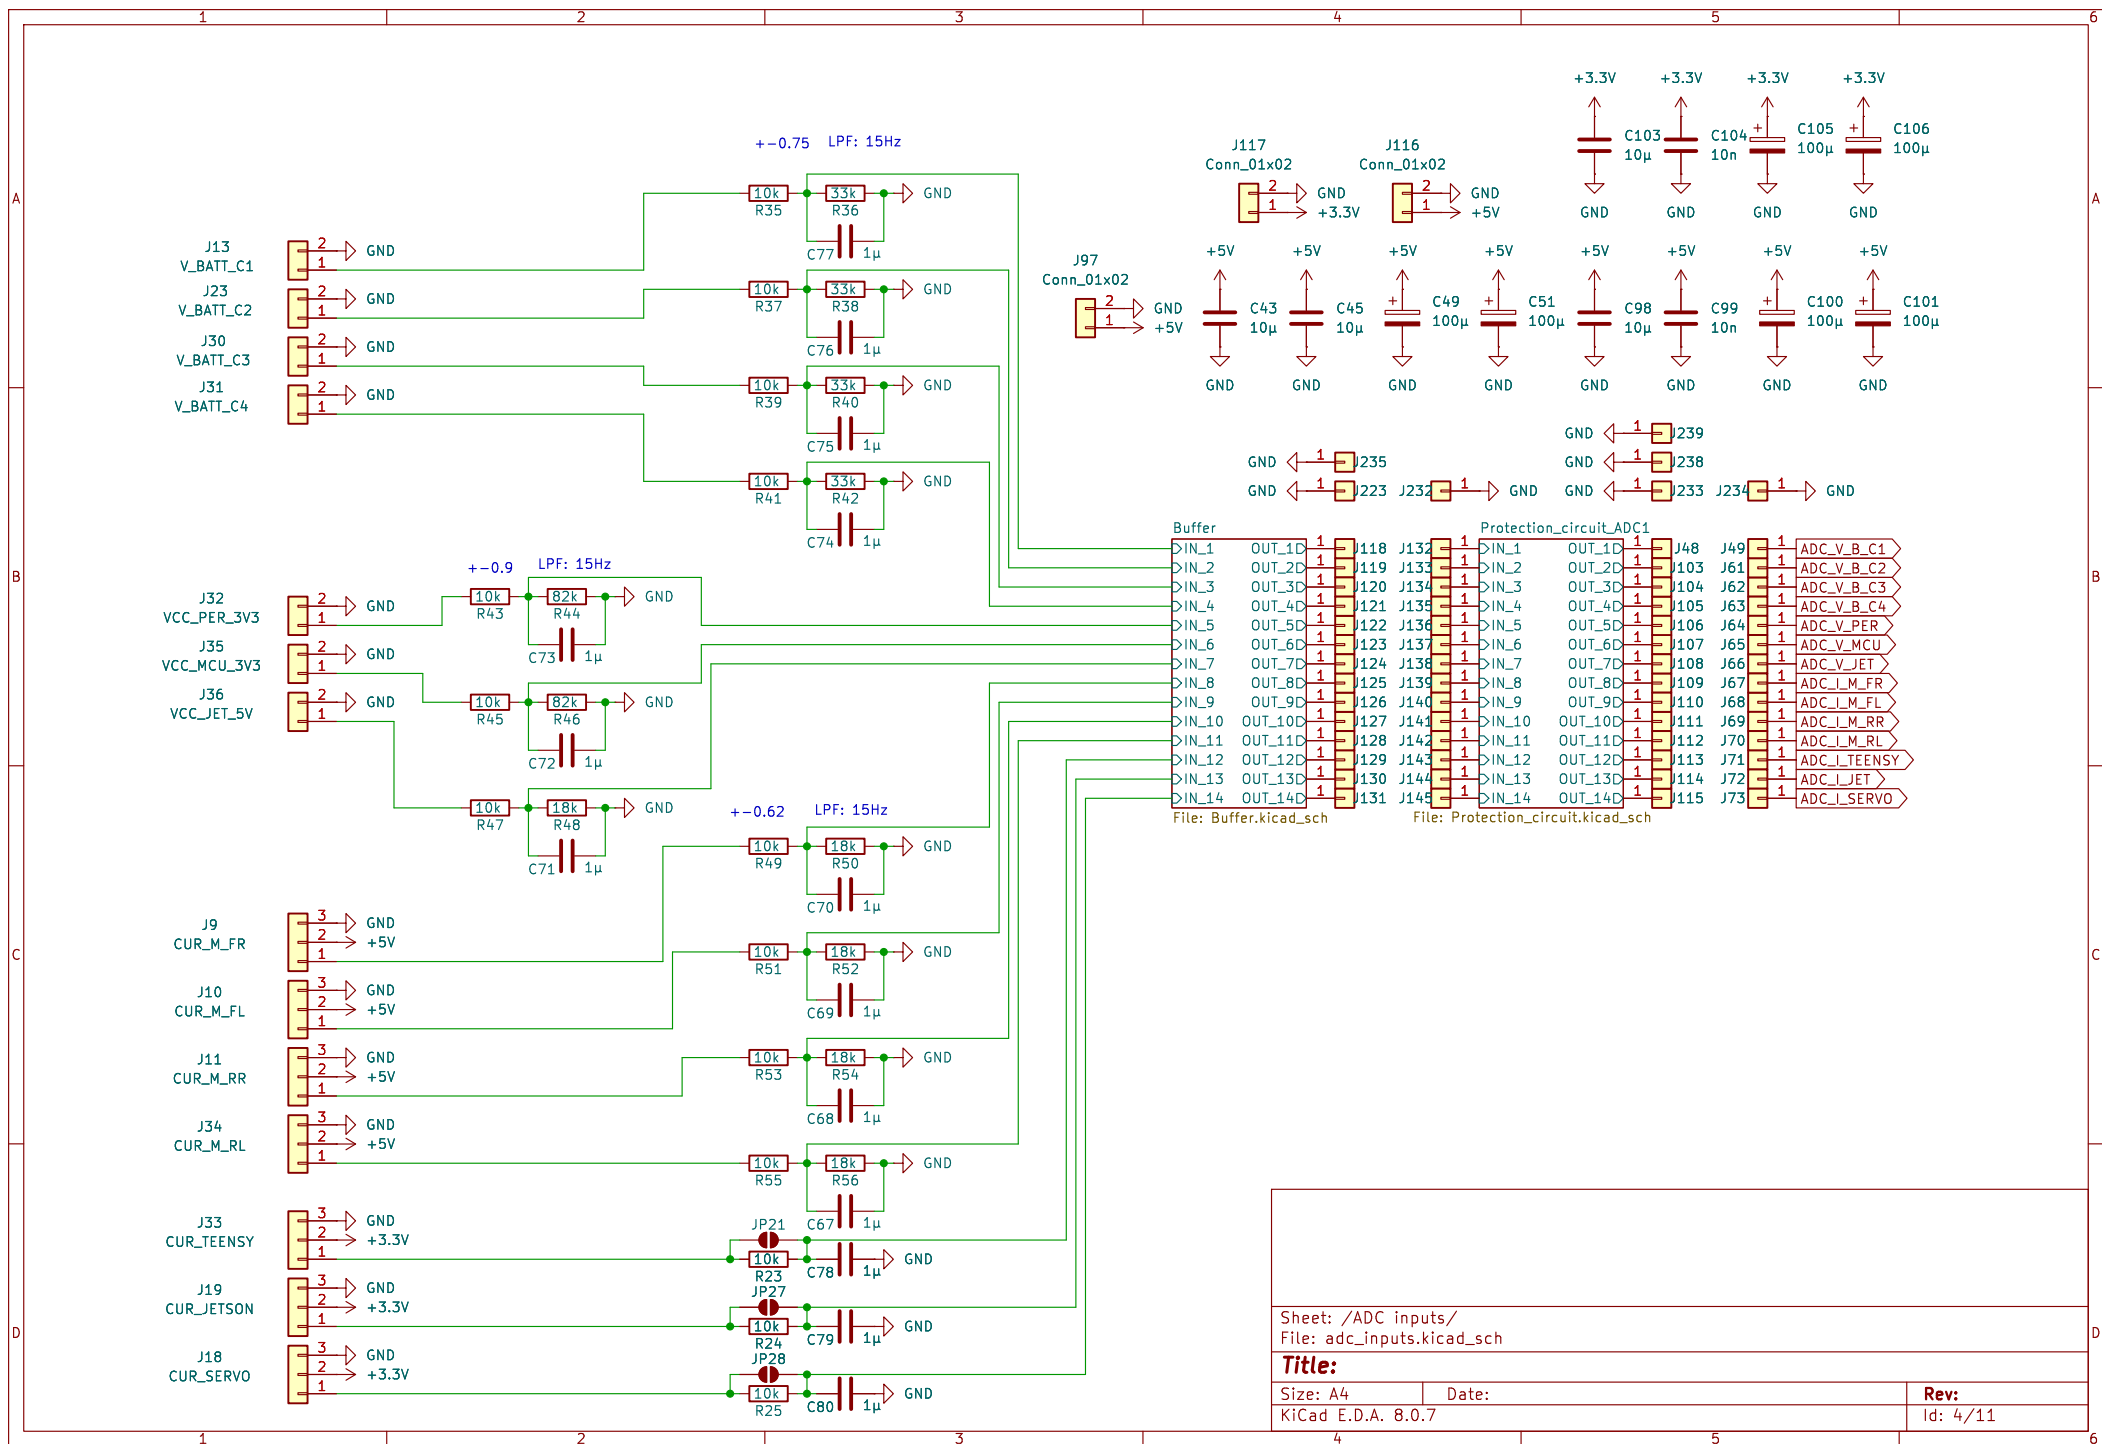






|                    |  |
|--------------------|--|
| Size: A4           |  |
| KiCad E.D.A. 8.0.7 |  |

Date:

Rev:  
Id: 5/11

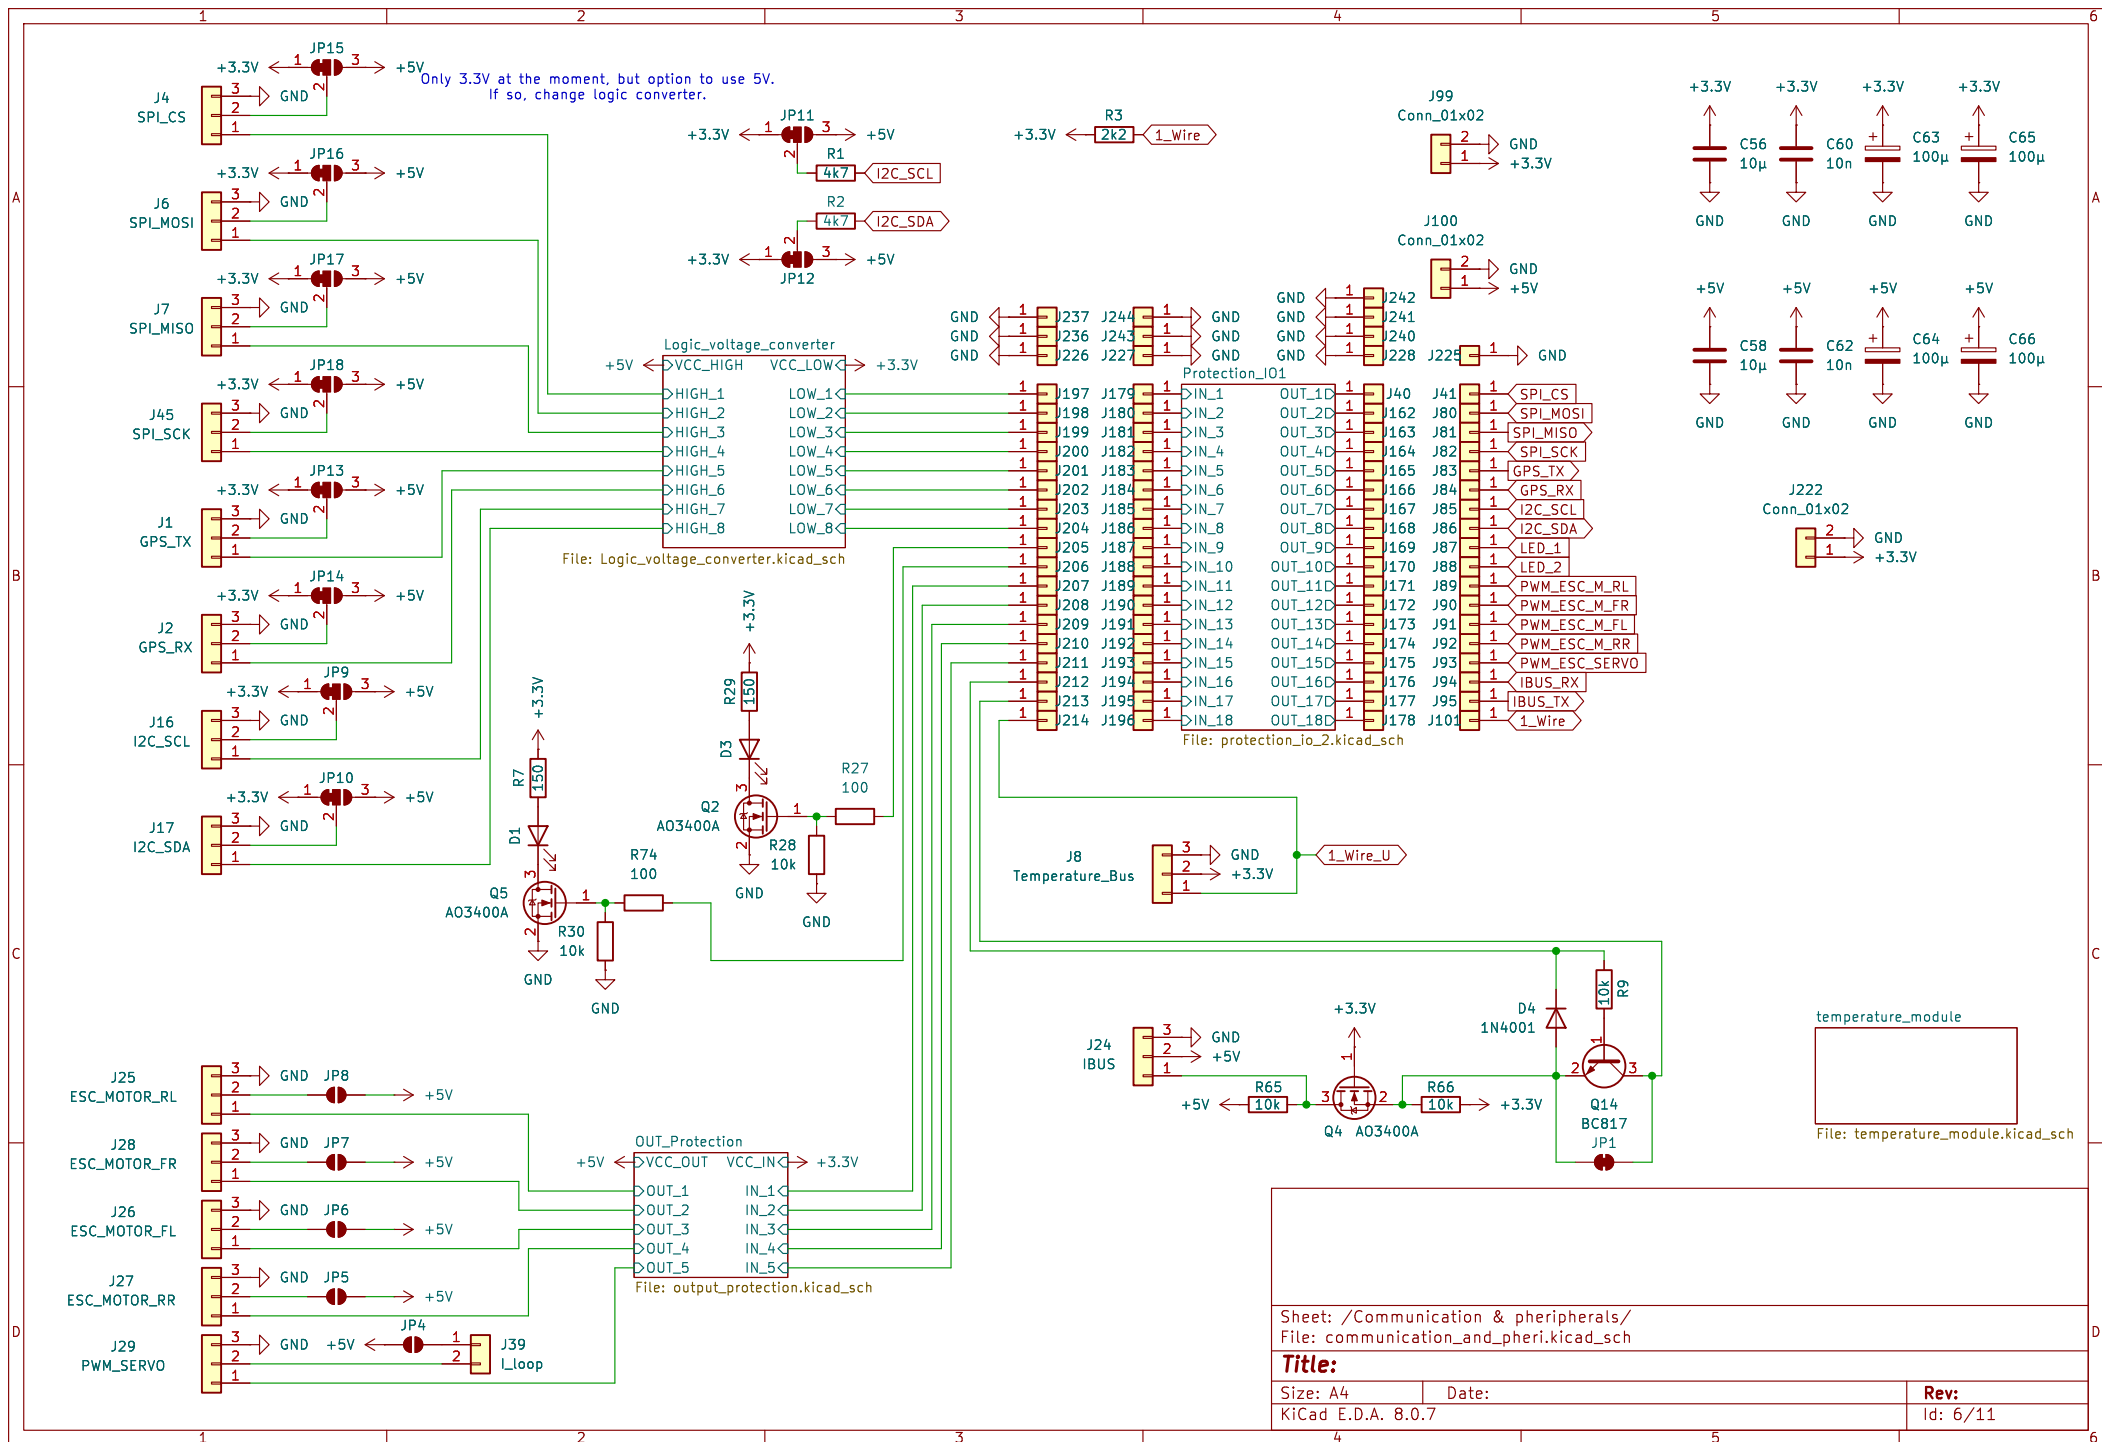

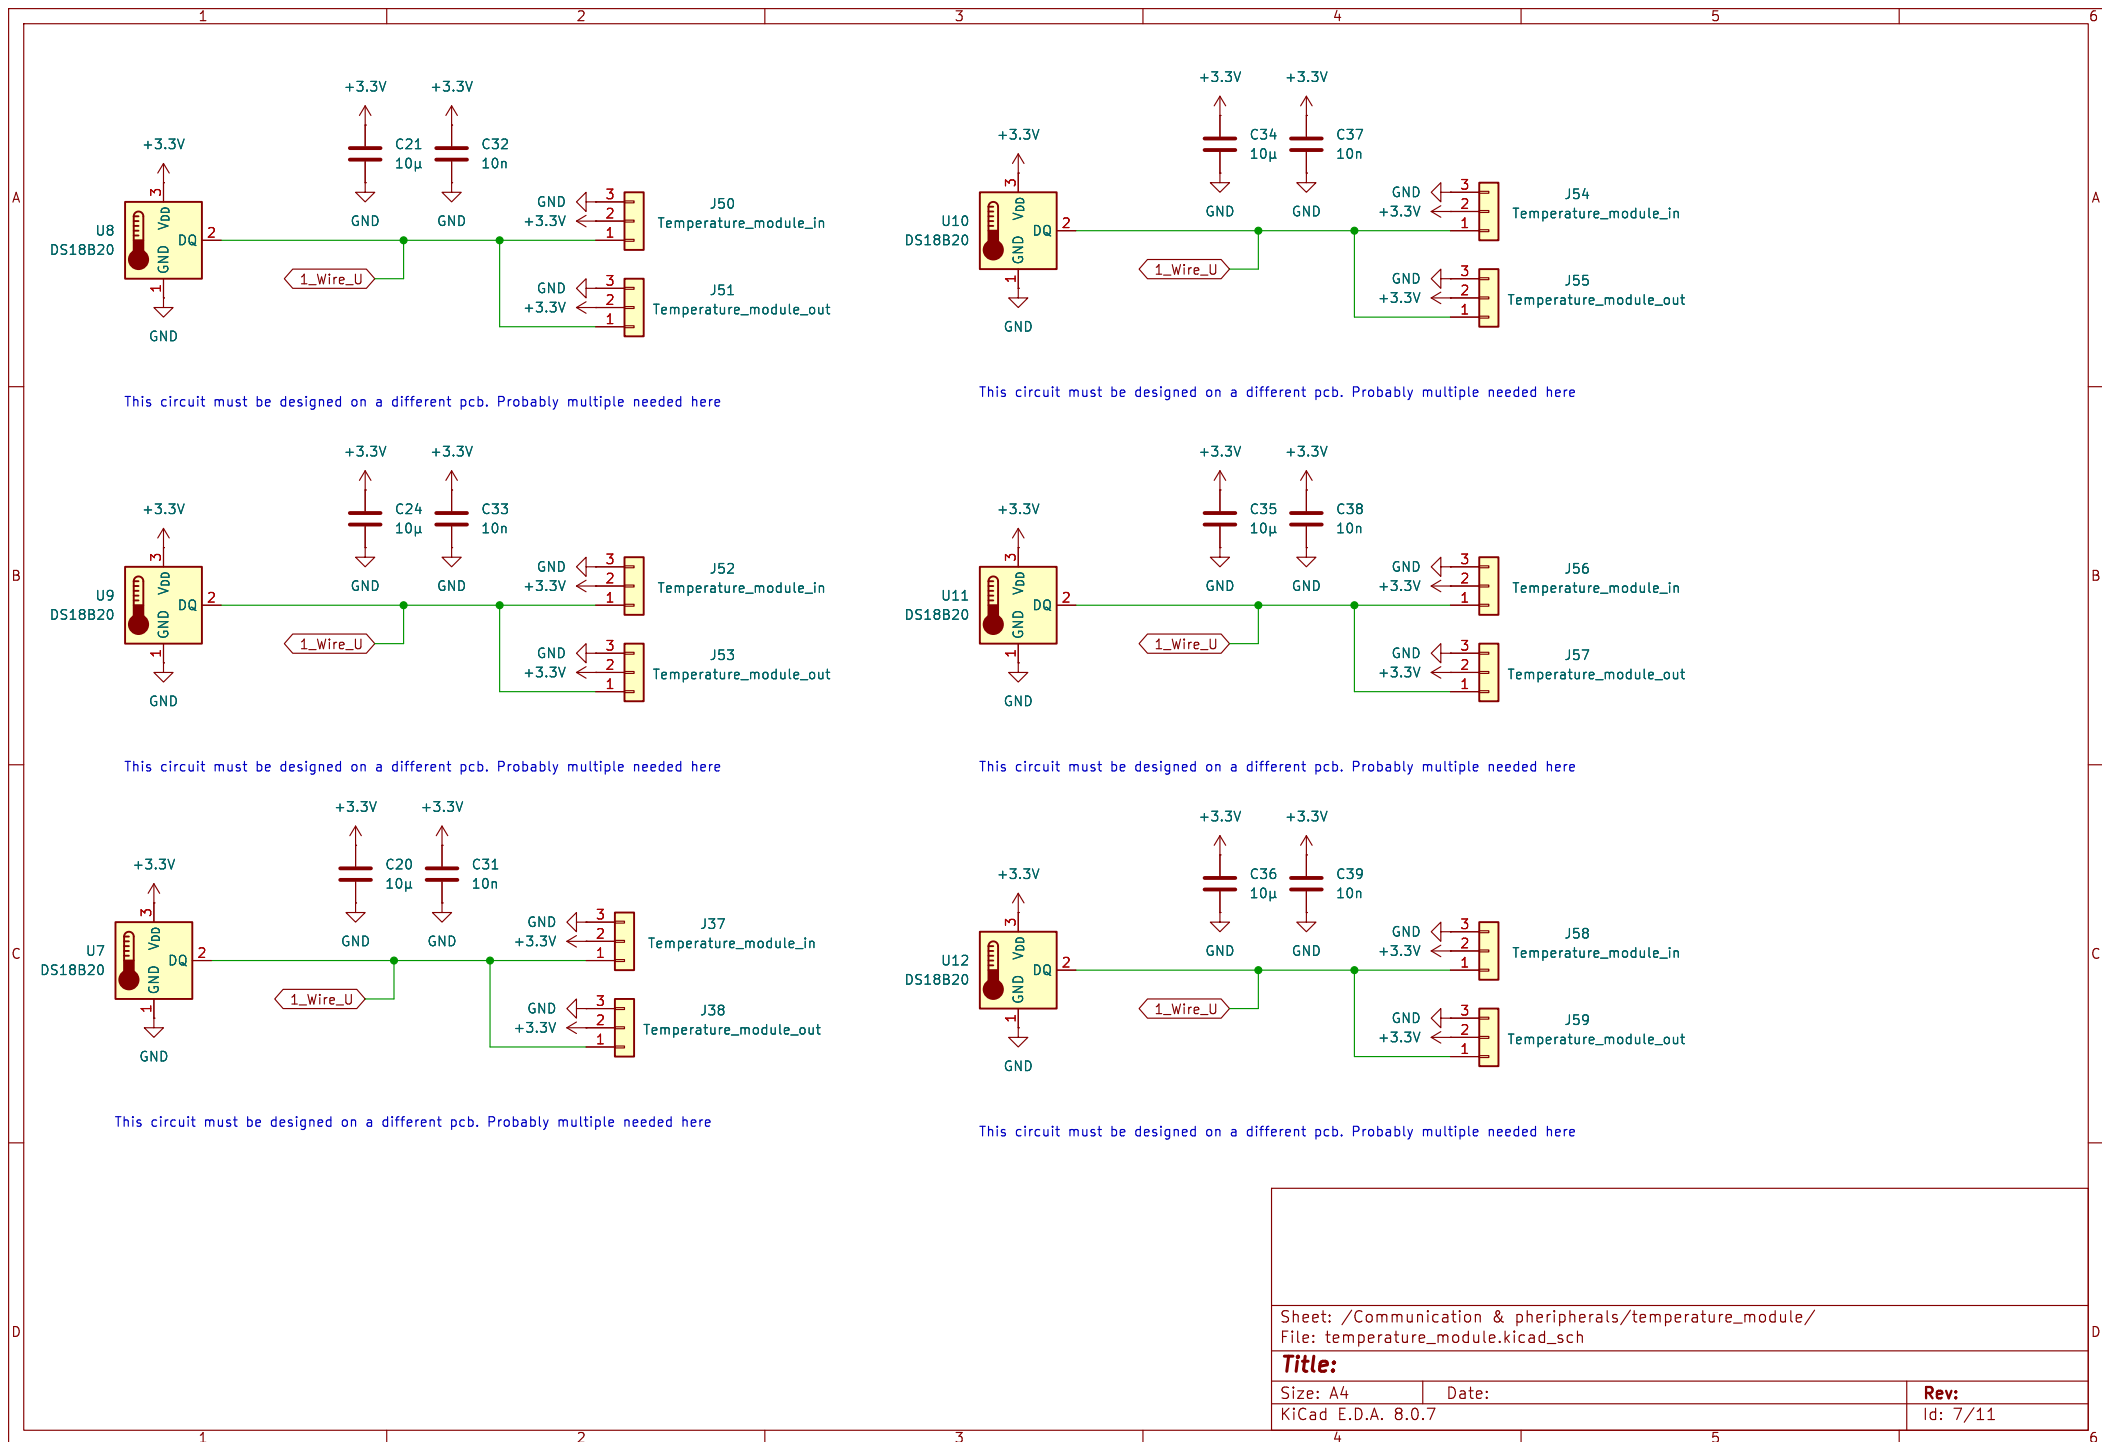

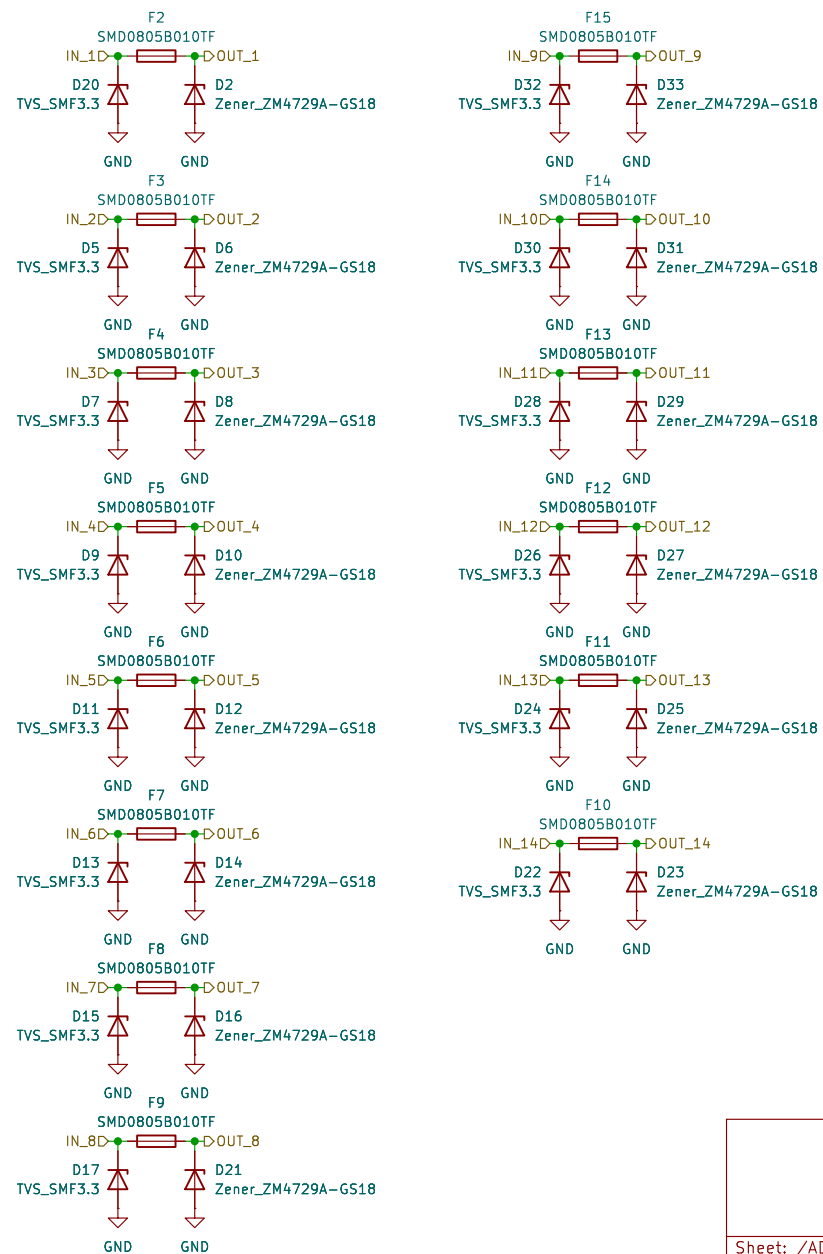

Sheet: /ADC inputs/Protection\_circuit\_ADC1/  
File: Protection\_circuit.kicad\_sch

**Title:**

Size: A4



Date:

Rev:


KiCad E.D.A. 8.0.7

Id: 8/11


JPX is used to disable the fuse if needed by OUT pin

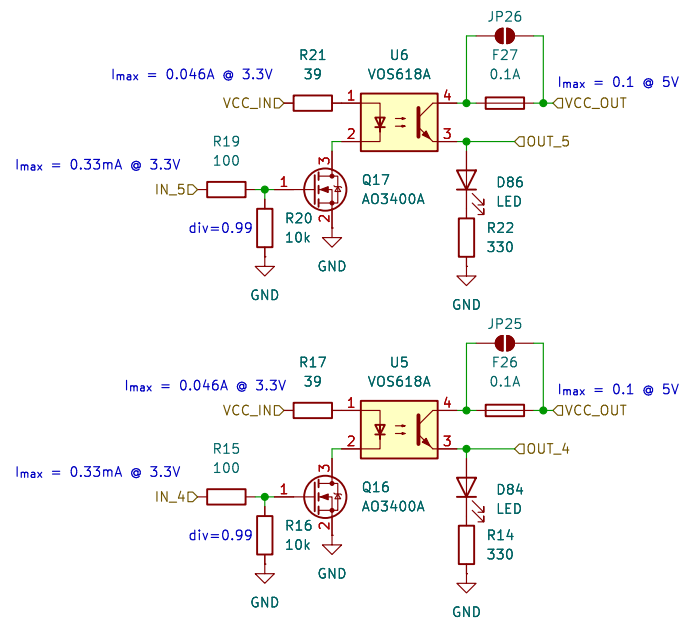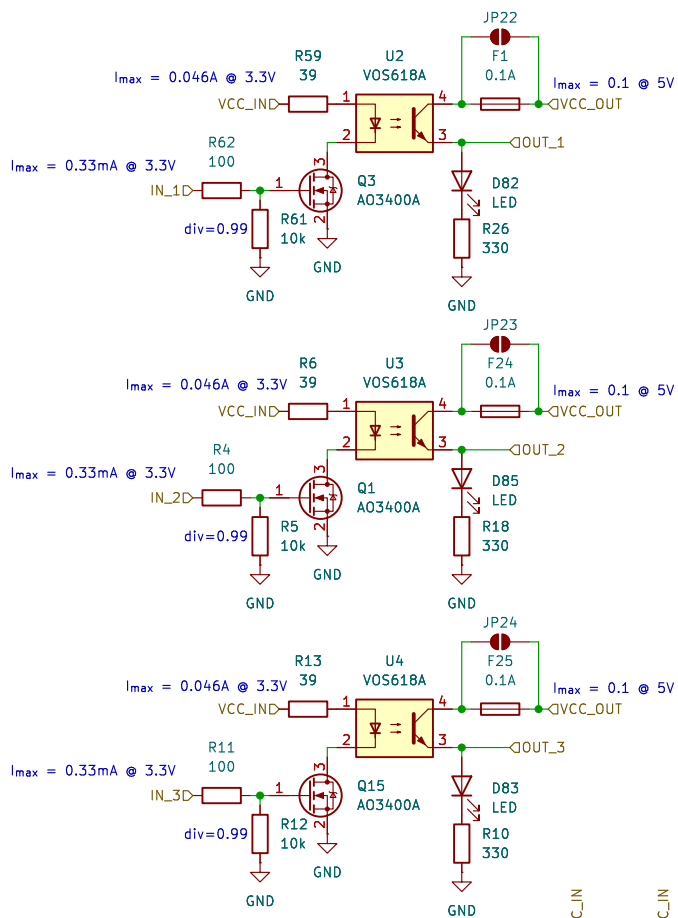

J96  
Conn\_01x02



J102  
Conn\_01x02

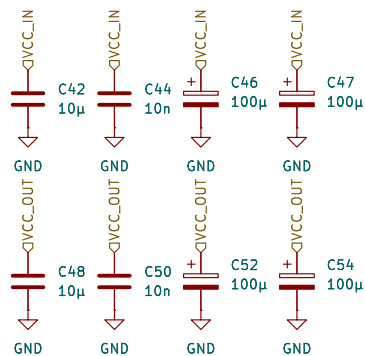

Sheet: /Communication & peripherals/OUT\_Protection/  
File: output\_protection.kicad\_sch

Title:

Size: A4


Date:

Rev:

KiCad E.D.A. 8.0.7

Id: 9/11



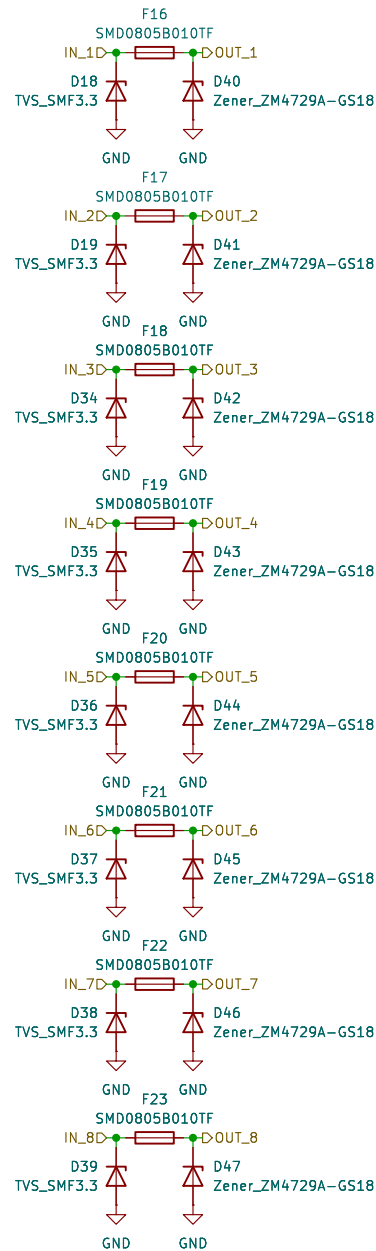

Sheet: /Encoder/Protection\_IO/  
File: protection\_io.kicad\_sch

**Title:**


Size: A4

Date:

**Rev:**

KiCad E.D.A. 8.0.7

Id: 9/11

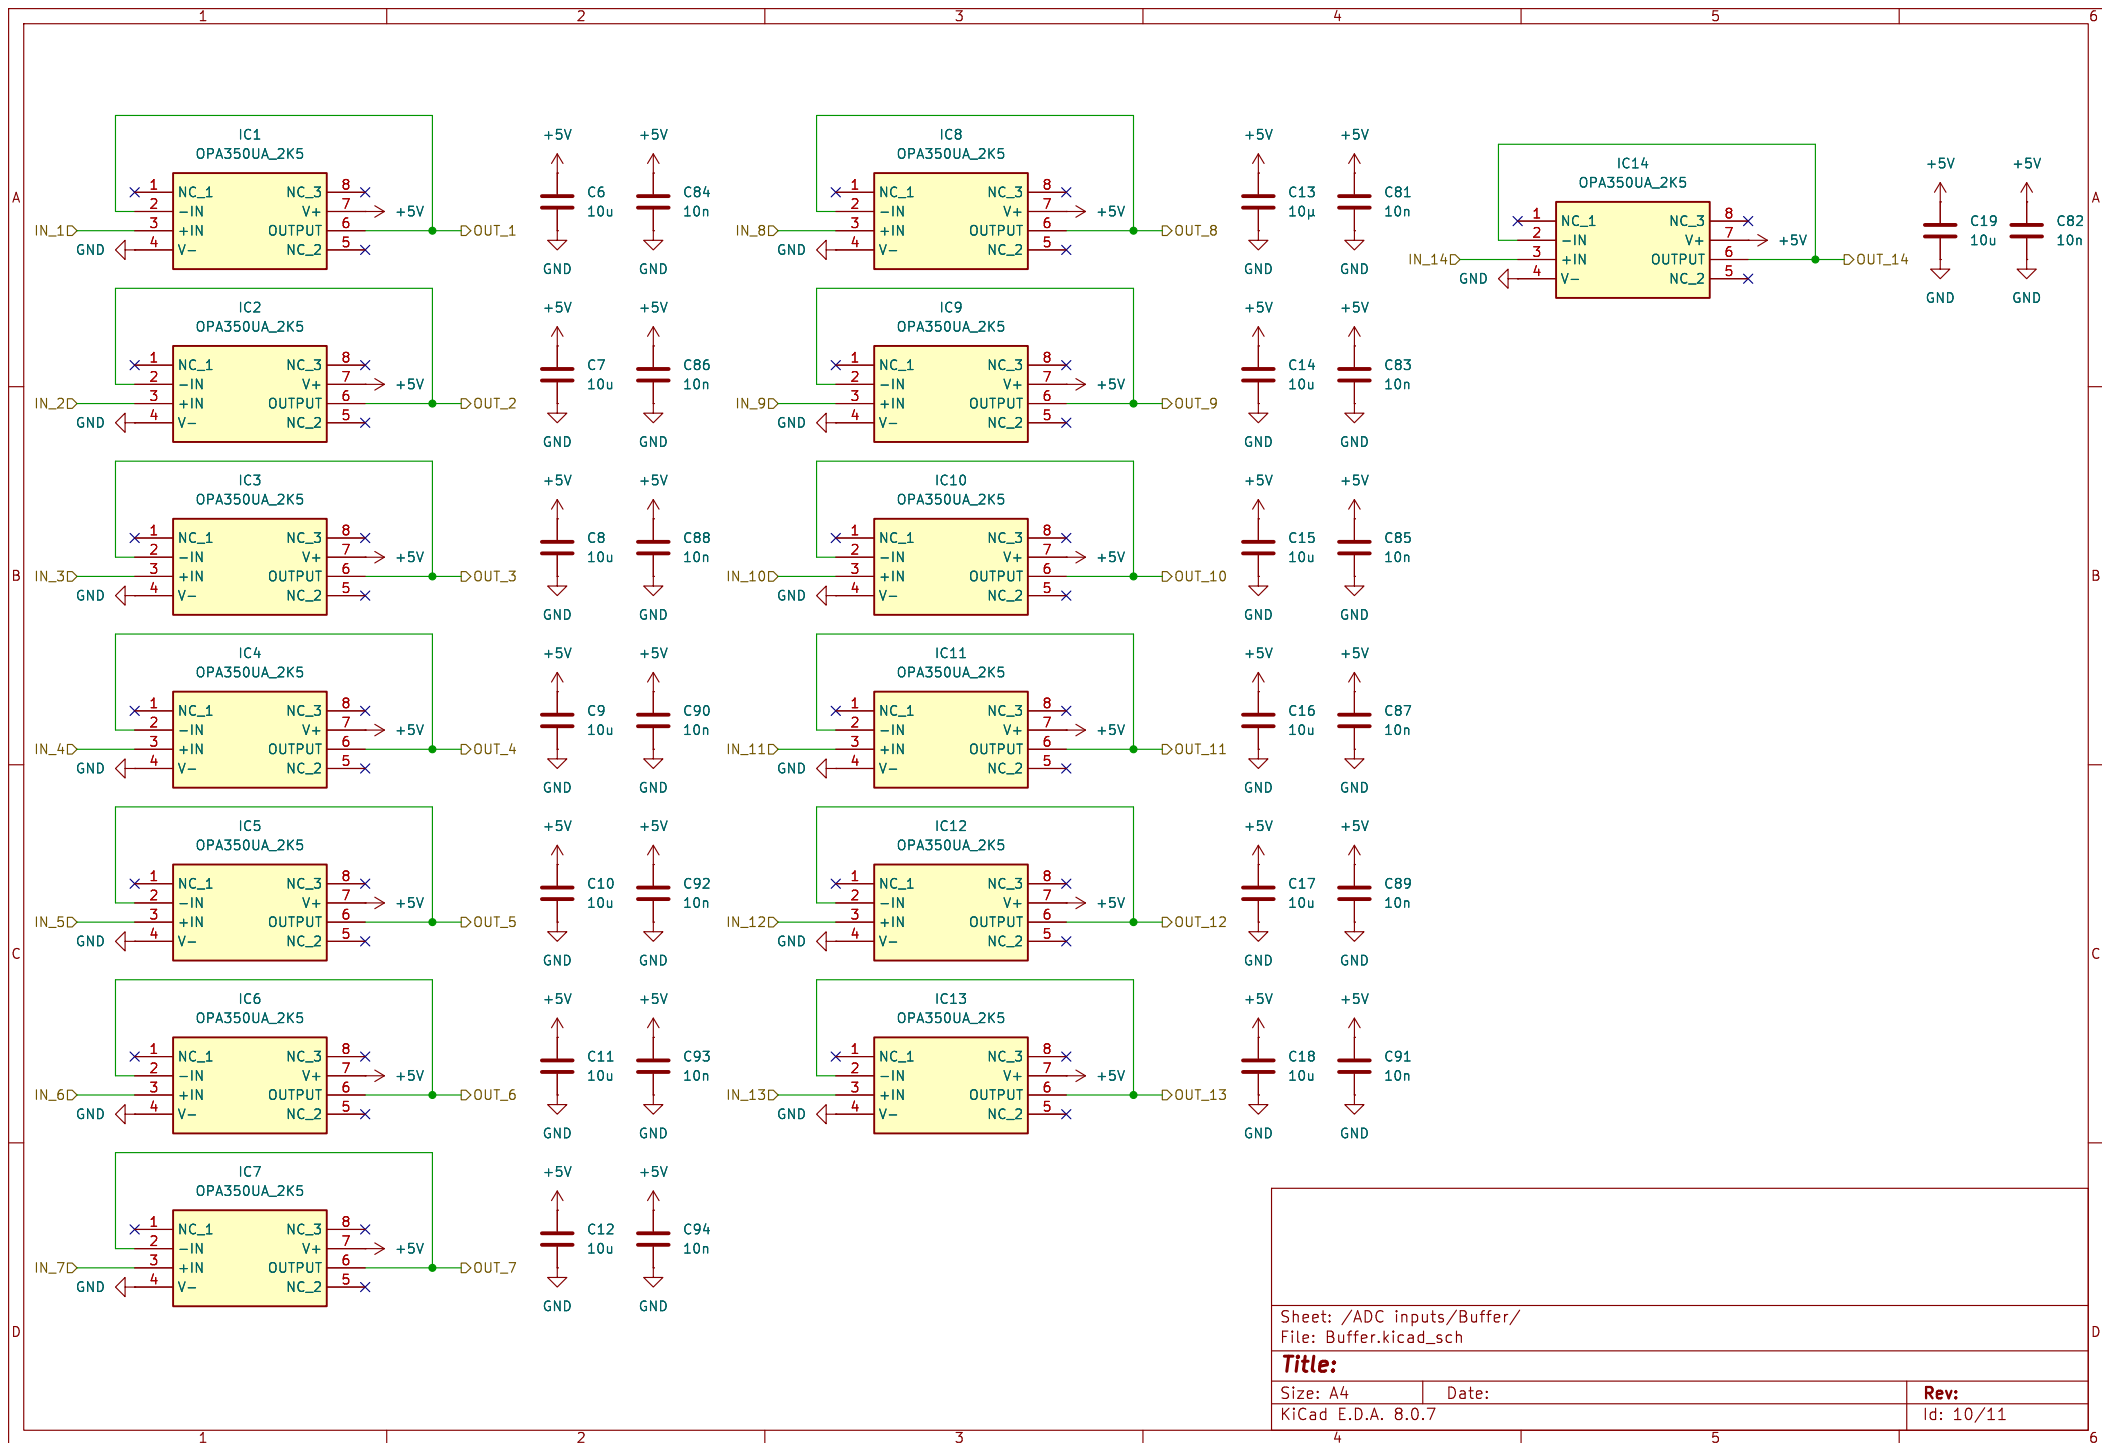

Sheet: /ADC inputs/Buffer/  
File: Buffer.kicad\_sch

**Title:**



Size: A4

Date:

KiCad E.D.A. 8.0.7

**Rev:**

Id: 10/11

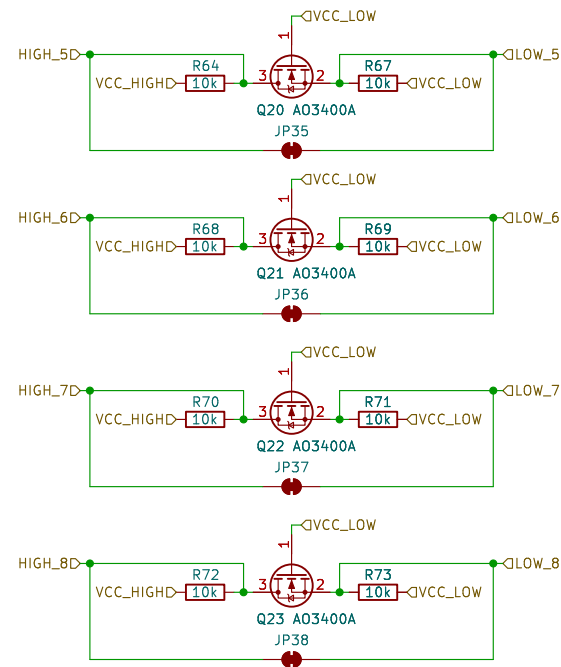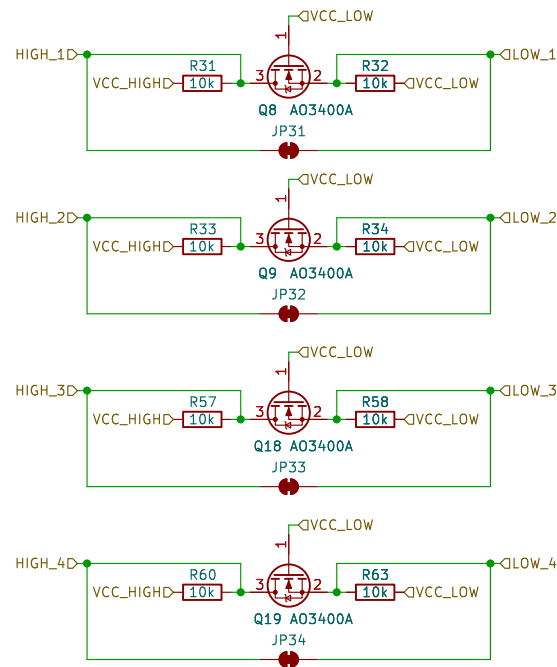

Not used at the moment, therefore JPX is shorted

Sheet: /Communication & peripherals/Logic\_voltage\_converter/  
File: Logic\_voltage\_converter.kicad\_sch

**Title:**

Size: A4

Date:

**Rev:**

KiCad E.D.A. 8.0.7

Id: 12/11