

SECTION A–A 1:2

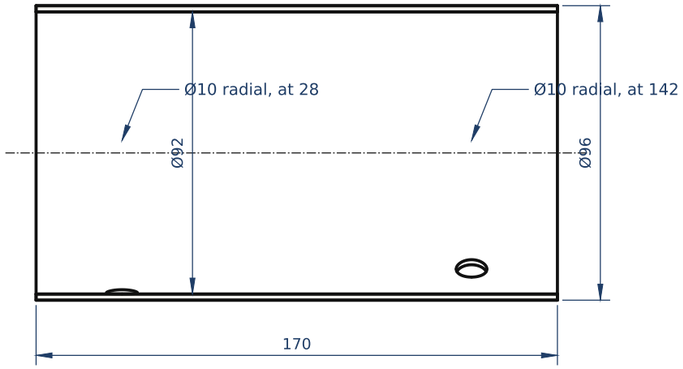

VIEW B 1:5



NOTES

1 The two radial holes take the rings' lead bushings (CAN-403) at |z| 57, toward each deck's Csa / Csb.
2 Inside and outside edges rounded R1; the surface clean (REF, the hub's boundary).
3 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	1
used in	CAN-400
source	sim/multiplier_layout.py CAN_R, CAN_T, CAN_Z
mass each	0.27 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the can

Can, Al, Ø96 × 2 × 170		Drawing no.
Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR]), tube		**DCCREG-CAN-401**
Mass: 0.27 kg	Qty per machine: 1	Rev A Sheet 19 of 79 A3
Scale: 1:2, 1:5	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**