

SECTION A–A 5:1

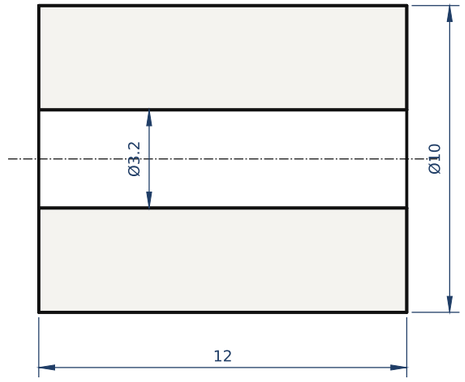

VIEW B 2:1



NOTES

1 Pressed into the can's hole; the lead's PTFE insulation runs through it unbroken (≥ 30 kV DC, docs/rings-design.md §3).

2 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	CAN-400
source	sim/tube_geometry.py BUSH
mass each	0.00186 kg



3-D view (axonometric, not to scale)

DCCREG turbine · the can

PTFE bushing, the ring's lead		Drawing no.
Material: PTFE, virgin (unfilled)		**DCCREG-CAN-403**
Mass: 0.00186 kg	Qty per machine: 2	Rev A Sheet 21 of 79 A3
Scale: 5:1, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**