

SECTION A–A (z across): above at 0° (the blades), below at 210° (a tie rod, a dowel) 1:2

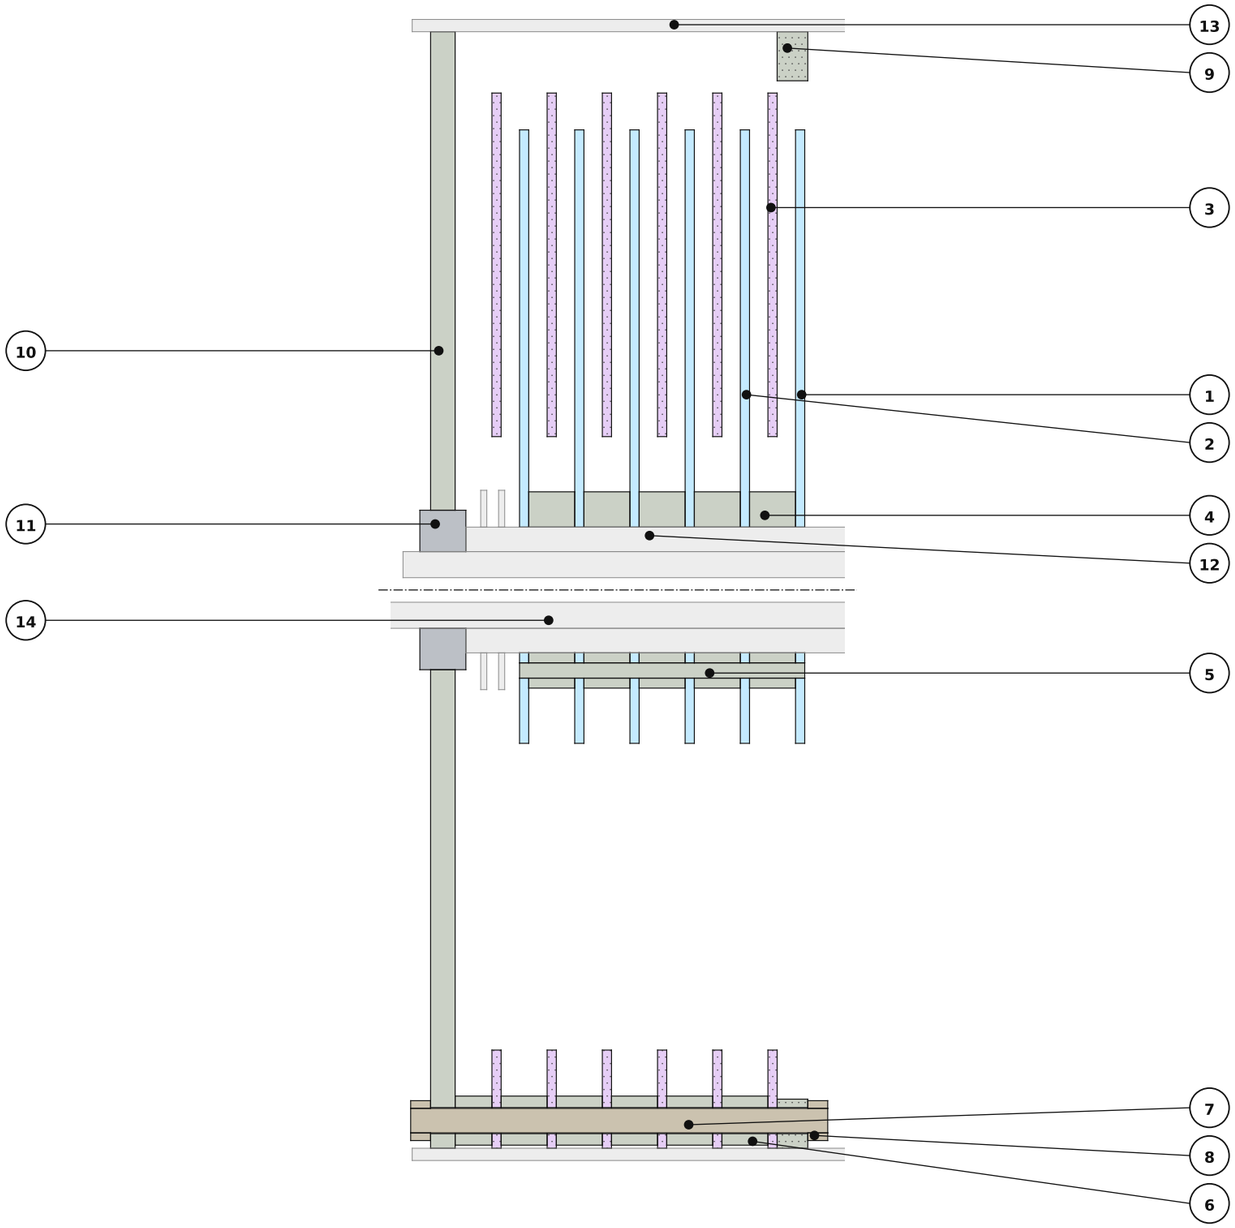

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

PARTS LIST

item	drawing	description	material	qty
1	CAP-602	rotor vane, first (r01)	Al	1
2	CAP-601	rotor vane (r03-r11)	Al	5
3	CAP-603	stator vane (s02-s12)	Al	6
4	CAP-604	rotor-vane spacer ring	G10	5
5	CAP-605	dowel	G10	3
6	CAP-606	stator spacer tube	G10	36
7	P-008	tie rod M8	glass-epoxy	6
8	P-008	nut M8	glass-epoxy	12
9	CAP-607	end ring	G10	1
10	BRG-810	Ca|reluctance spider	G10	1
11	P-001	Ca|reluctance bearing	—	1
12	SHF-304/-307	rotor sleeve, sheds (for reference)	—	ref.
13	CGE-901	cage (for reference)	—	ref.
14	SHF-301	shaft (for reference)	—	ref.

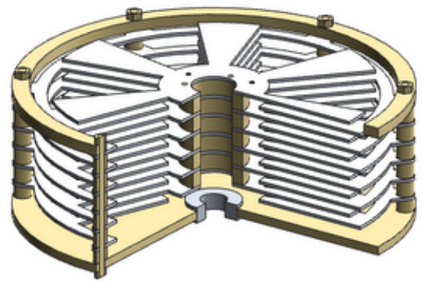

3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

NOTES

1 Rotor: the six rotor vanes and five G10 spacer rings bonded on the sleeve, aligned by three G10 dowels (90°, 210°, 330°); r01 carries the node-1 comb's posts (CAP-610).
2 Counter-rotor: the six stator vanes on six glass-epoxy tie rods M8 at r 173 with G10 spacer tubes, from the end ring (bonded in the cage's bore) to the Ca|reluctance spider; nuts finger-tight + 1/4 turn [IR].
3 The gaps: 6 mm between every rotor and stator vane (gauge them at the six blades); the rims 12 mm or more from any G10 (sim/doubler-caps-findings.md §2).
4 Side B (C2) is the mirror, its stator vanes in phase with C1's.

DCCREG turbine · the doubler: C1 / C2

C1 / C2 varicap stack, side A		Drawing no.
Material:		**DCCREG-CAP-600**
Mass: —	Qty per machine: 2	Rev A Sheet 32 of 79 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**