

PLAN 1:2

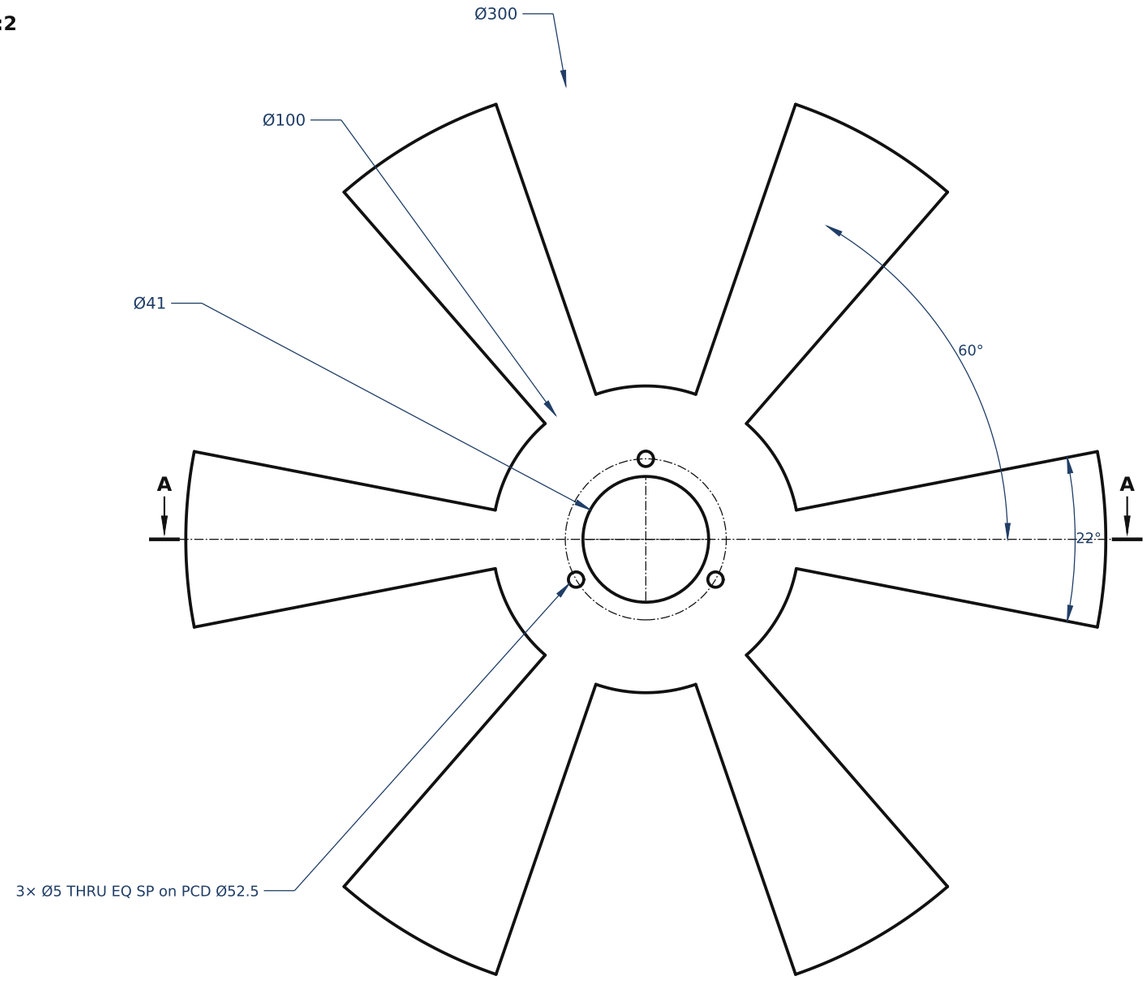

SECTION A–A 2:1

(its part from r 14 to 58)

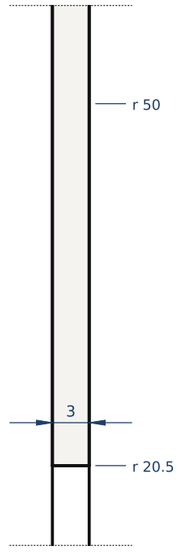


NOTES

1 6 blades of 22° on a 60° pitch, r 50-150, on the hub ring r 20.5-50 (node 1 / 4).
2 Three dowel holes Ø5 H7 at r 26.25 (90°, 210°, 330°) for the stack's alignment.
3 Every rim a full round R1.5 (t / 2), burr-free, Ra ≤ 0.8 µm: the record's rims are full rounds on a handled surface (Peek m 0.85, sim/vane-matrix-findings.md §2). Clean with IPA after the last operation; handle with gloves.
4 Flatness 0.10 over the whole plate; parallelism of the faces 0.05: the 6 mm working gaps (sim/stack_sizing.py).
5 Laser- or waterjet-cut, then the rims rounded (CNC or tumble and hand-finish).
6 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	10
used in	CAP-600
source	sim/stack_sizing.py (the record's vane); sim/doubler_caps.py (the dowels)
node	1 (C1) / 4 (C2)
holds	13.2 kV pk to the stator vanes
mass each	0.239 kg

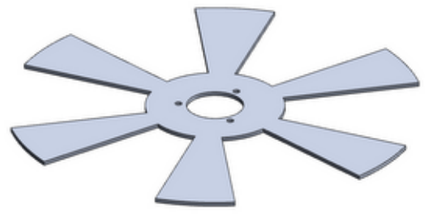

3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: C1 / C2

Rotor vane, C1 / C2 (r03-r11)

Drawing no. **DCCREG-CAP-601**

Material: Al EN AW-6082-T6 (the record: Al; the grade proposed [IR]), plate 3.0

Mass: 0.239 kg	Qty per machine: 10	Rev A Sheet 33 of 79 A3
Scale: 1:2, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**