

PLAN 2:1

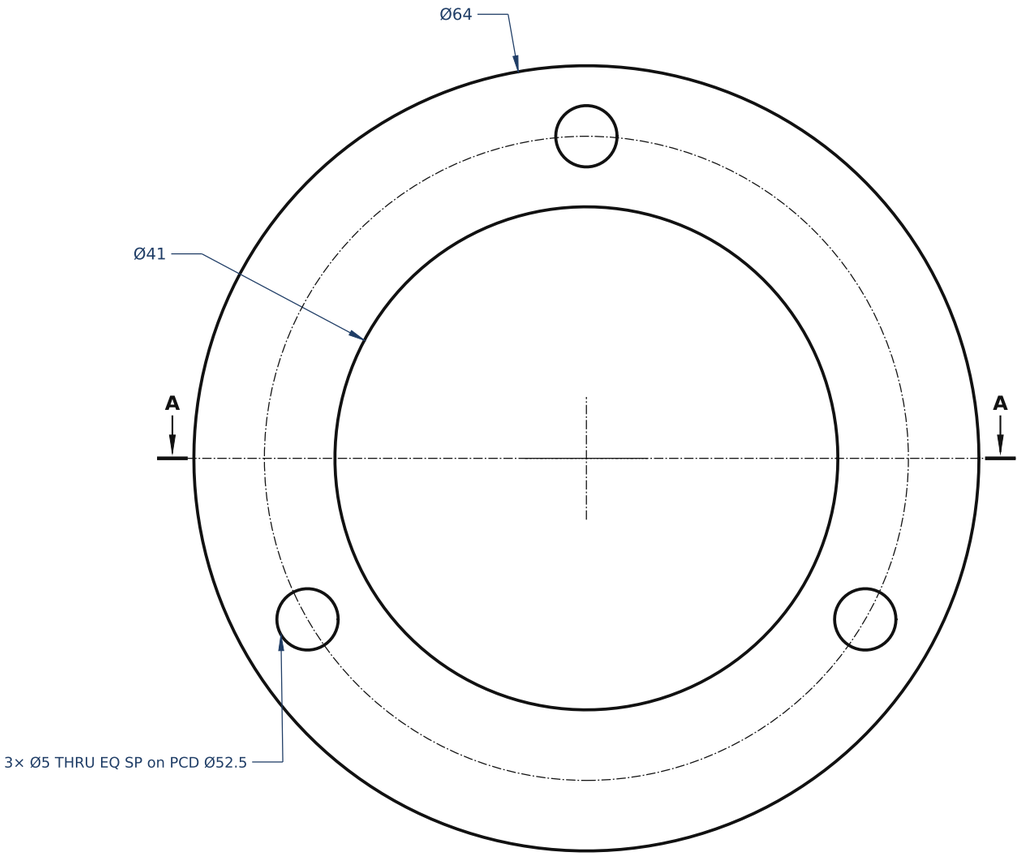

SECTION A–A 2:1

(its part from r 18 to 34)




NOTES

1. Between two rotor vanes' hub rings (both node 1): 15.00 ±0.02 long sets their 18 mm pitch.
2. Its OD stays 18 mm inside the stator blades' inner ends (r 50).
3. Bonded to the vanes and the sleeve.
4. G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
5. General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	10
used in	CAP-600
source	sim/doubler_caps.py VSP_R1, DOWEL
mass each	0.051 kg

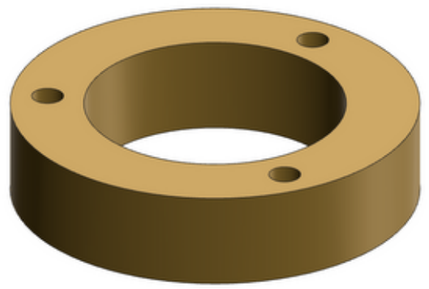

3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: C1 / C2

Rotor-vane spacer ring, G10

Drawing no. **DCCREG-CAP-604**

Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2)

Mass: 0.051 kg	Qty per machine: 10	Rev A Sheet 36 of 79 A3
Scale: 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**