

PLAN 1:5

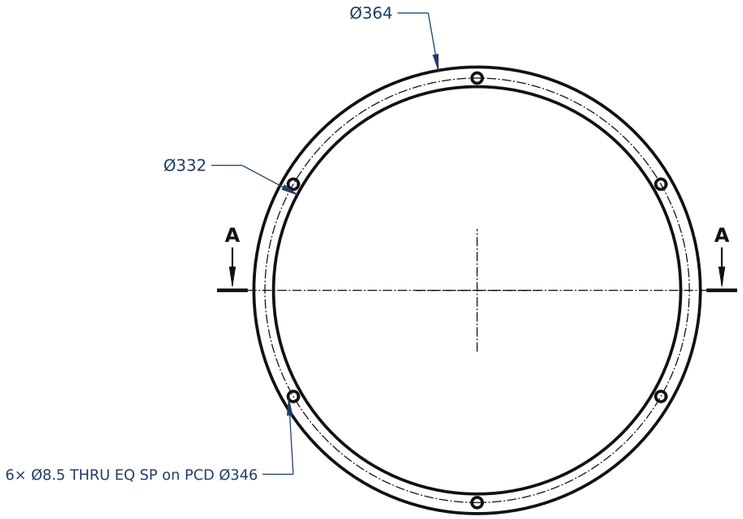

SECTION A–A 2:1

(its part from r 160 to 186)




REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

status	PROPOSED
qty per machine	2
used in	CAP-600, CGE-900
source	sim/doubler_caps.py END_RING
mass each	0.317 kg

NOTES

1 Bonded in the cage's bore, its upper face 0.00 / -0.05 from the first stator vane's seat.
2 Six Ø8.5 holes at r 173 for the tie rods; the nuts below it.
3 G10 machined across the laminate where the drawing shows faces normal to z; seal every cut edge with low-viscosity epoxy (tracking along exposed fibres, presets/hub-locked.json shaft_coupler).
4 General tolerances ISO 2768-mK; dimensions in mm; do not scale. Views by hidden-line removal of the model's solids.

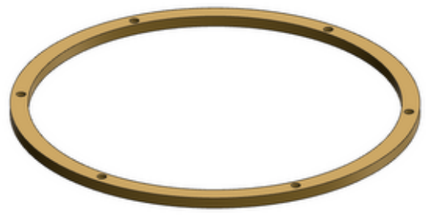

3-D view (axonometric, not to scale)

DCCREG turbine · the doubler: C1 / C2

End ring, G10, in the cage's bore

Drawing no. **DCCREG-CAP-607**

Material: G10 glass-epoxy laminate, EP GC 201 (IEC 60893-3-2)

Mass: 0.317 kg	Qty per machine: 2	Rev A Sheet 39 of 79 A3
Scale: 1:5, 2:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**